


Bolt Guide



4005 Strike

Header Bolt

4016

ANSI/BHMA Type E82111 (Grade 1)

▼ Strike

For header bolt, a 1/2" diameter hole in metal frame is suitable or, for non-metal installations, 4005 strike is available.

Not applicable to wood doors.

▼ Adjustment



Exact adjustment of threaded rod to door height is locked in place by hexagonal header bolt.

▼ Door/Cylinder Height

The standard version is designed for a 7' door height with cylinder height as low as 35". Can also be ordered for up to 10' door with additional extension.

▼ Function

Adding the 4016 Header Bolt and the 4015 Threshold Bolt to a pivoted MS® deadbolt allows for Maximum Security for pairs of doors by the turn of a single key. Simultaneously extending the hardened steel hexbolts top and bottom and pivoting the massive MS® deadbolt into the mating stile, the three-point lock secures the entire double door entrance. The 4016 can be added to any basic MS1850S, MS1850SN or for two-points top and bottom use with 1870/1870HM Cylinder-Operated Flushbolt. Not applicable to 7/8" backset locks.

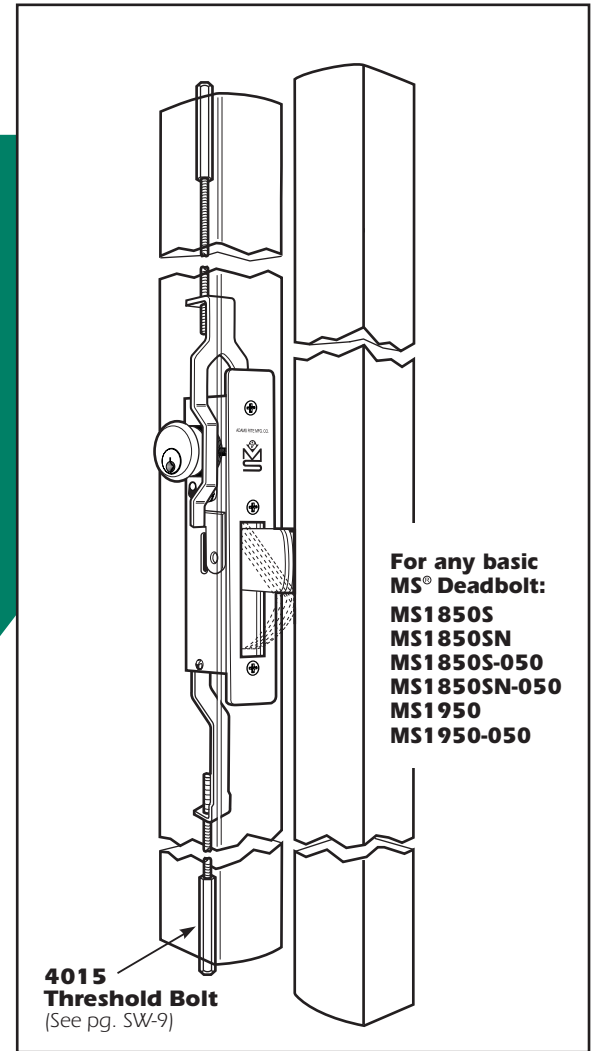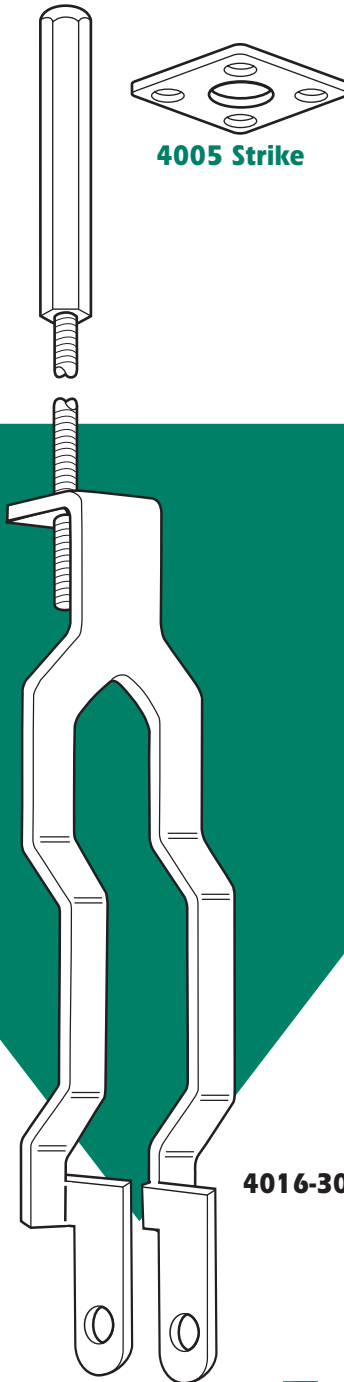

For any basic MS® Deadbolt:
MS1850S
MS1850SN
MS1850S-050
MS1850SN-050
MS1950
MS1950-050

4015 Threshold Bolt
(See pg. SW-9)

▼ Header Bolt

Hexagonal 3/8" flat to flat. Made of hardened steel and plated for corrosion resistance.

▼ Operation

360° turn of key or thumbturn in basic MS® lock throws counterbalanced bolt into opposite door and hexagonal bolt into header strike. Key can be removed only when bolts are in a positively locked or unlocked position.






4016 Header Bolt

DIMENSIONS


INCHES
MILLIMETERS

Nominal, subject to tolerance extremes.

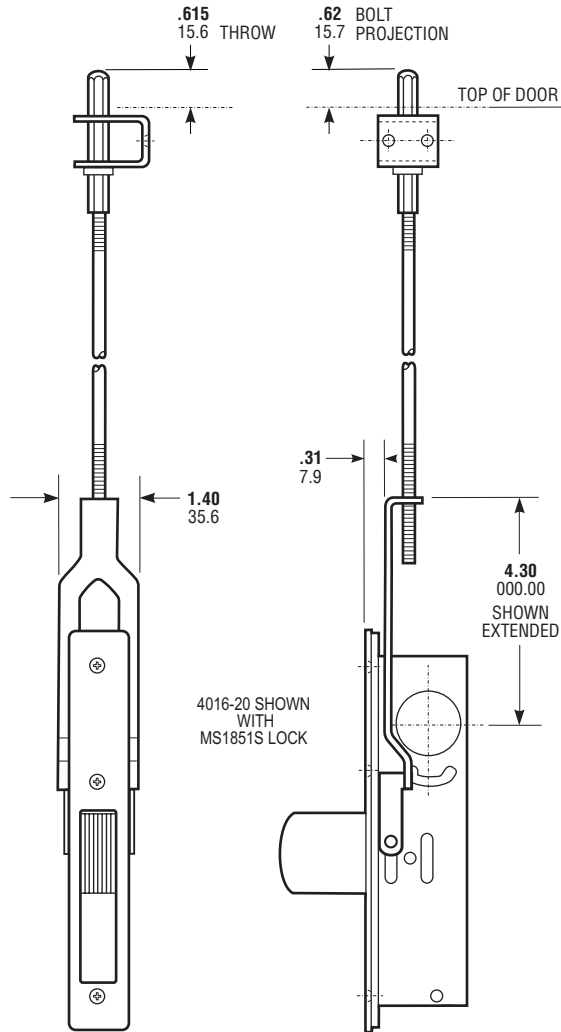

INSTALLATION

INSTALL ADAPTOR ARM TO LOCK FROM TOP WITH BOLT RETRACTED AS SHOWN. INSTALL PIN THROUGH SLOTS IN LOCK SIDE PLATES, PASSING THROUGH HOLES IN BOTH SIDES OF THE ADAPTOR ARM.

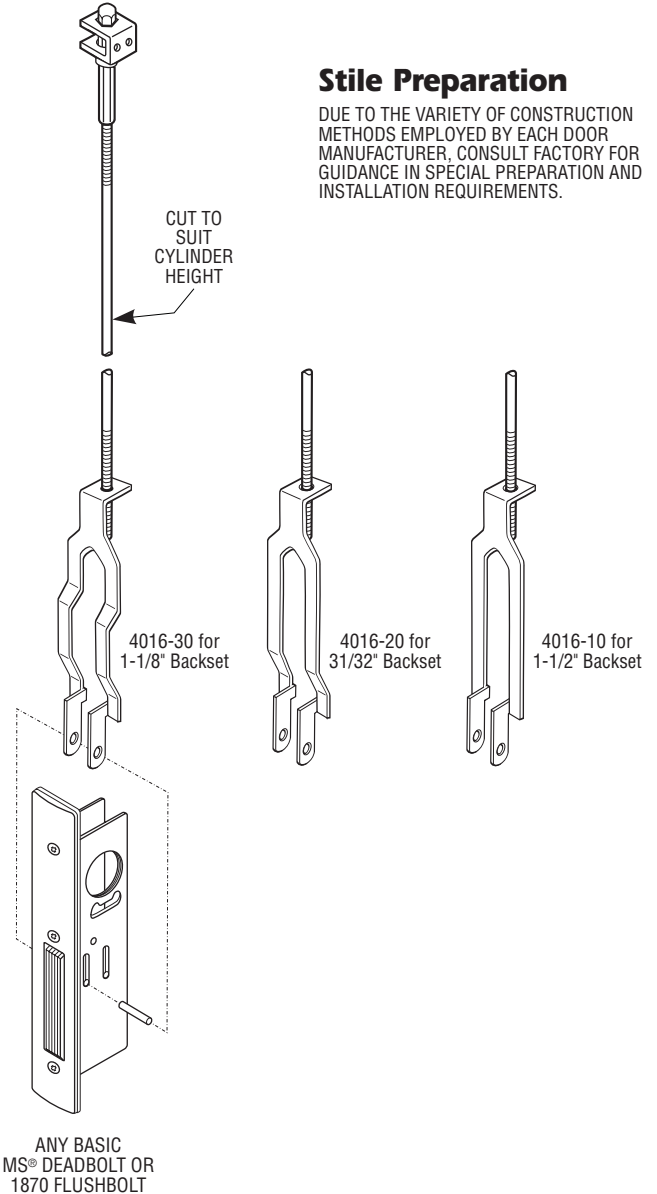

Stile Preparation

DUE TO THE VARIETY OF CONSTRUCTION METHODS EMPLOYED BY EACH DOOR MANUFACTURER, CONSULT FACTORY FOR GUIDANCE IN SPECIAL PREPARATION AND INSTALLATION REQUIREMENTS.

HOW TO ORDER

*Specify quantity and the following information.
Order related hardware separately.*

Lock Backset

- 10** 1-1/2"
- 20** 31/32"
- 30** 1-1/8"

Door Height

- 01** 7' Door
- 02** 10' Door

4016 - 30 - 01

STANDARD PACKAGE

Packed separately with bolt guide, screws and attachment pin. Shipping weight: 1 lb. Order MS Deadbolt and 4015 Threshold Bolt separately.