
# **SWINGING DOOR HARDWARE**



SW-8

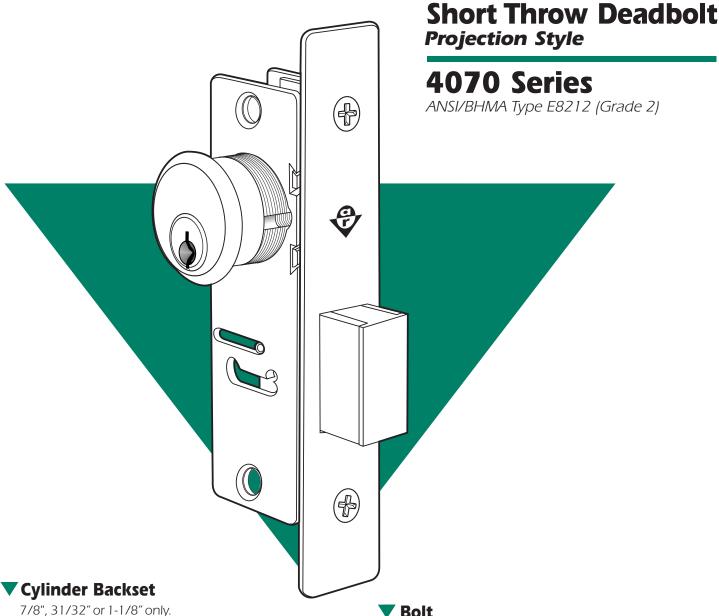

## Case

Steel with corrosion-resistant plating. 1" x 6" x depth. (Depth varies by backset. See table on back page.)

## Function

For installations where the long-throw MS® Deadlock cannot be accommodated, the smaller 4070 offers the longest practical throw for a conventionally projected bolt from a narrow stile. Operates with one-half key turn of any standard mortise type cylinder or cylinder type thumbturn. NOT TO BE USED IN BOTTOM RAIL.

## **Bolt**

5/8" x 1-1/4" x 5/8" throw.

### Strike

In metal installations, a slot in jamb serves as strike. Deluxe trim strike 4170 is also available for wood installations.

## Operation

 $180\,^{\circ}$  turn of key or thumbturn projects or retracts the bolt. Accepts any standard 1-5/32" mortise cylinder from either or both sides. Cylinder must have cam to fit. (See catalog page SW-28.)






# **4070 Short Throw Deadbolt**

## **Projection Style**

## **DIMENSIONS**


#### INCHES MILLIMETERS


Nominal, subject to tolerance extremes.

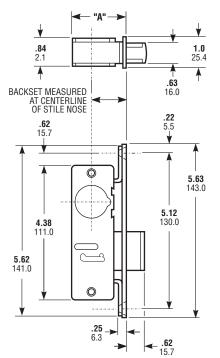


BACKSET	"A"
<b>7/8"</b> 22.2	<b>1.57</b> 39.9
<b>31/32"</b> 24.6	<b>1.63</b> 41.4
<b>1-1/8</b> " 28.6	<b>1.78</b> 45.2

#### 4170 Trim Strike








4070 Series locks are operable by any standard 1-5/32" diameter mortise cylinder with cam dimensioned as shown. See page SW-28 for cylinder make and trim ring information

## **HOW TO ORDER**


Specify quantity and the following information. Order related hardware separately.




Faceplates available in US28 (628) Clear Anodized. Consult factory for special finishes.. Specify 4170 Trim Strike if required.

\*Any flat or radius face.

## **INSTALLATION**

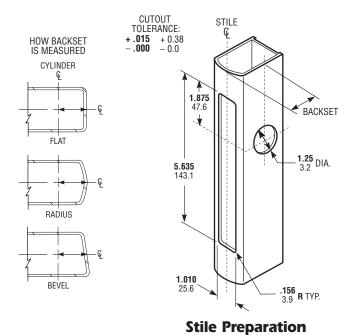



## **STANDARD PACKAGE**

Individually boxed with machine screws for mounting. Cylinders and/or thumbturn available at extra cost. Shipping weight: 1/2 lb. Also available in a 25 unit pack for volume users.