



# Features & Dimensions

## Rim Exit Device

### ANSI/BHMA Grade 1

### Handing

Device is non-handed. Lever Entry Trim is field reversible.

### Pushbar Length

Standard Sizes: Dimensioned for 30", 36", 42" & 48" openings. Standard width bars can be field cut to the next smallest opening width.

### Door Thickness

Suits 1-3/4" standard, up to 2-1/4".

### Stile Width

3700 - Minimum 3-3/4"\*

8700 - Minimum 3-3/4"

\*Door construction may require additional stile width to meet fire ratings and provide adequate strength.

### Projection

2-5/8" when fully projected,

1-5/8" when dogged.

### Materials

Pushbar made of extruded aluminum, clad or anodized in a variety of finishes.

### Dogging

Standard dogging with hex key or optional cylinder dogging for 8700 Series only. Electric dogging also available for 3700 and 8700 Series.

### Fasteners

Standard self-tapping screws. Optional Sex Bolt Kits - 26-0584 (2 required per device) Specify finish.

### Strike

Made of hardened steel. Supplied with exit device.

### Cylinders (order separately)

#### Cylinder x Fixed Pull:

(Functions 03)

Accepts any standard Rim cylinder.

#### Entry Lever or Thumbturn:

(Functions 08, 09, 11, 12)

Accepts any standard diameter Mortise cylinder with MS® cam. Accommodates cylinder lengths from 1" to 1-1/4".

### Warranty

Two year limited.

### AVAILABLE FINISHES

**313** Dark Bronze Anodized

**335** Black Anodized

**628** Clear Anodized

**US3** Bright Brass

**US4** Satin Brass

**US9** Bright Bronze

**US10** Satin Bronze

**10B** Dark Bronze  
(Trim only)


**US32** Bright Stainless

**US32D** Satin Stainless

*Consult factory for special finishes.*




### Starwheel Bolt

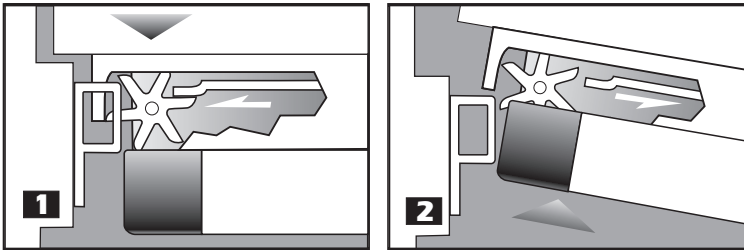


[1] When door closes, the interlocking noseguard and Starwheel bolt close around the strike. The deadlocking slide springs over, locking the Starwheel bolt to the strike. [2] When pushbar is depressed, the deadlocking slide moves back, allowing the door to unlock from the strike. This unique interlock provides solid security and prevents jamb spreading.


### Strike



Standard hardened steel strike



### Pushbar Dimensions

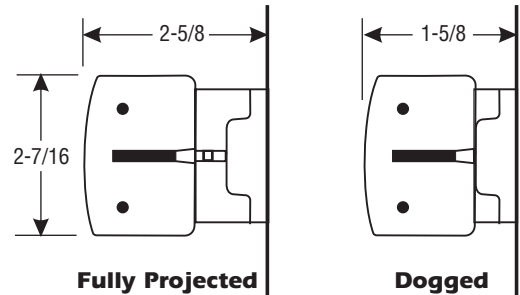

### Removable Mullion - 3889

Allows the use of Rim exit devices on paired doors without narrowing the doors. Provides higher security and better traffic flow than paired doors with Vertical Rod exit devices. The 3889 is used for fire-rated applications or with non-rated devices on wood or hollow metal doors. Available in primer only. Specify door height when ordering.

