Corbin Russwin®

Narrow Stile Pushpad Exit Devices

ED4000 Series

An ASSA ABLOY Group company

ASSA ABLOY

ED4000 Series

Applications

Designed for applications on narrow stile full glass, aluminum and metal doors in high-use and high-abuse situations, ED4000 Series devices can be teamed with a variety of Corbin Russwin trims to provide desired functions, styles and finishes in new construction and renovations, including:

- Schools and universities
- Health care facilities
- Government and municipal buildings
- Factories and warehouses
- Office and retail complexes
- Transportation facilities
- Hotels and conference centers
- Religious facilities
- Theaters and auditoriums

Advantages

- Meets ANSI Grade 1 requirements
- Easy-to-use pushpad for quick egress and ADA compliance
- Low projection for barrier-free code compliance
- Heavy-duty construction
- Quiet operation
- Closed on all sides – no projecting parts to inhibit egress
- Devices accommodate various function trims for flexibility
- Through-bolted trims for strength, security, durability, smooth operation and easy installation
- Wide range of designs and finishes to match other Corbin Russwin products
- One-point dogging
- Devices satisfy UL/cUL safety requirements

Applications	2
Applications and Listings	3
Functions	4
SecureBolt™ Features	6
Rim Features	8
Surface Vertical Rod Features	10
Concealed Vertical Rod Features	12
Trims and Functions	14
Electrified Exit Devices	16
Mullions	27
Options and Accessories	28
Cylinders	30
How to Order	31
Quick Codes	32
Facts and Figures	33
Helpful Terms	34
How to Specify	35

This catalog can be found on the Internet at the Corbin Russwin website at: www.corbin-russwin.com

ED4000 Series Narrow Stile Pushpad Exit Devices

Applications and Listings

Single Door	Maximum Opening	Application	
Rim ED4200	4' x *	Surface applied; single-point latching.	
SecureBolt™ ED4200S	4' x *	Surface applied; single-point latching.	
Surface Vertical Rod ED4400	4' x 10'	Surface applied; two-point latching.	
Concealed Vertical Rod ED4800	4' x 10'	Rods concealed in door; two-point latching.	

Pair of Doors with Removable Mullion	Maximum Opening	Application	
Rim x Rim ED4200 x ED4200 x 808	8' x 8'	Two independent active doors with removable mullion.	
SecureBolt x *SecureBolt* ED4200S x ED4200S x 808	8' x 8'	Two independent active doors with removable mullion.	

Pair of Doors	Maximum Opening	Application	
Surface Vertical Rod ED4400 x ED4400	8' x 10'	Two independent doors with two-point latching, swinging in the same direction.	
Surface Vertical Rod (Double Egress) ED4400 x ED4400	8' x 10'	Two independent doors with two-point latching, swinging in opposite directions.	
Concealed Vertical Rod ED4800 x ED4800	8' x 10'	Two independent doors with two-point latching, swinging in the same direction.	
Concealed Vertical Rod (Double Egress) ED4800 x ED4800	8' x 10'	Two independent doors with two-point latching, swinging in the opposite direction.	

Note: All ED4000 Series Narrow Stile Pushpad Exit Devices are UL305 panic listed.
*UL does not set a door height limitation on panic applications.

Exit Only, Pull and Thumbpiece Trims

Rim/SecureBolt™ ED4200 ED4200S Inside Outside	Surface Vertical Rod ED4400 Inside Outside	Concealed Vertical Rod ED4800 Inside Outside	Type	ANSI No.	Function Description
			**Exit Only**	**01**	Exit only; no trim.
			**Dummy**	**02**	Entrance by trim when actuating bar is locked down.
			**Nightlatch**	**03**	Entrance by trim when latchbolt is retracted by key. Key removable only when locked.
			**Classroom***	**05**	Entrance by thumbpiece. Key locks or unlocks thumbpiece.
			**Passage**	**15**	Entrance by trim when latch is released by thumbpiece. Thumbpiece is always active, no cylinder.
			**Storeroom (Thumbpiece Active)**	**06**	Entrance by thumbpiece only when released by key. Key removable only when locked.

*Classroom function trims can be converted to Storeroom function by a simple field adjustment.

Knob, Lever and Thumbturn Trims

Rim/SecureBolt™ ED4200 ED4200S Inside Outside	Surface Vertical Rod ED4400 Inside Outside	Concealed Vertical Rod ED4800 Inside Outside	Type	ANSI No.	Function Description
			**Dummy**	**02**	Entrance by trim when actuating bar is locked down.
			**Classroom***	**08**	Entrance by knob or lever. Key locks or unlocks knob or lever.
			**Passage**	**14**	Entrance by trim when latchbolt is released by knob or lever. Knob or lever always active, no cylinder.
			**Storeroom (Grip Active)**	**09**	Entrance by knob or lever only when released by key. Key removable only when locked.
			**Classroom***	**11**	Entrance by control turn piece. Key locks or unlocks control.
			**Passage**	**16**	Latchbolt retracted by thumbturn.

*Classroom function trims can be converted to Storeroom function by a simple field adjustment.

ED4200S Narrow Stile SecureBolt™ Exit Device

Features

Handing
Device non-handed.
Trim handed.

Bar Length
Easily field cut to size.
Standard: 36" bar fits 30"- 36" (762mm-914mm) door.
Optional: 24" bar fits 24" (610mm) door; specify W024.
Optional: 48" bar fits 36"- 48" (914mm-1219mm) door; specify W048.

Door Thickness
1-3/4" (44mm) standard.
Optional: 2" (51mm); specify D200.
Optional: 2-1/4" (57mm); specify D214.

Stile
Minimum width 2" (51mm).

Deadbolt
Full 3/4" (19mm) projection, 1" (25mm) strike engagement, positive deadlocking by auxiliary bolt.

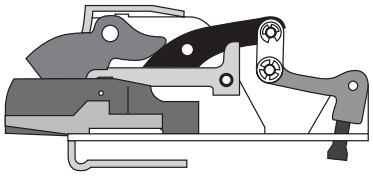

Cutaway Side View

Materials
High-grade, heat-treated, corrosion-resistant nickel steel alloy. Finished parts are brass, bronze or stainless steel; stainless steel springs; nylon bearings.

Latchbolt: High-grade, heat-treated, corrosion-resistant nickel steel alloy. Slide action deadbolt with positive deadlocking by auxiliary bolt. Two-piece deadbolt mechanism utilizing a roll-back lever which eliminates any contact (friction) with the strike during relocking.

Projection
3-1/4" (83mm) active, 2-3/4" (70mm) dogged.

Dogging
Standard: single-point 1/4 turn hex key dogging.
Optional: less dogging; specify M51.
Optional: cylinder dogging; specify M52.
Optional: electric dogging, specify M97.

Fasteners
Standard: machine screws.
Optional: sex nuts and bolts; specify M54.

Strike
Surface mounted 3/8" (10mm) diameter roller strike, complete with positive locking plate and shims, ensuring low-friction relocking for a long, trouble-free life.

Functions and Trims
Through-bolted lever, knob, pull, thumbturn and thumbpiece trims available with wide range of functions; see Trims and Functions, page 14.

Cylinders
Cylinder not included unless specified. See Quick Codes, page 32.

Removable Mullion
See Mullions, page 27.

Shim Kit
Optional for mounting device over raised vision light molding; specify M58.

Applications and Listings
See page 3.

Warranty
Five-year limited.

Certification/Compliance

ANSI
Meets A156.3, Type 4 or 28, Grade 1.
Meets A117.1 Accessibility Code.

UL /cUL
All devices listed for safety as panic hardware; devices comply with UL 305 standards for panic hardware. UL symbol on active case cover indicates listing.

California State Reference Code
This product has been approved by the California State Fire Marshal pursuant to section 13144.1 of the California Health and Safety Code.

NFPA
All exit devices comply with NFPA 101 Life Safety Code.

ADA
Exit devices, lever trims and pulls comply with Americans with Disabilities Act.

Finishes

BHMA 605	**Bright Brass**
BHMA 606	**Satin Brass**
BHMA 611	**Bright Bronze**
BHMA 612	**Satin Bronze**
BHMA 613	**Dark Oxidized Satin Bronze, oil rubbed**
BHMA 625	**Bright Chromium Plated**
BHMA 626	**Satin Chromium Plated**
BHMA 629	**Bright Stainless Steel**
BHMA 630	**Satin Stainless Steel**

ED4200S SecureBolt™ Exit Device

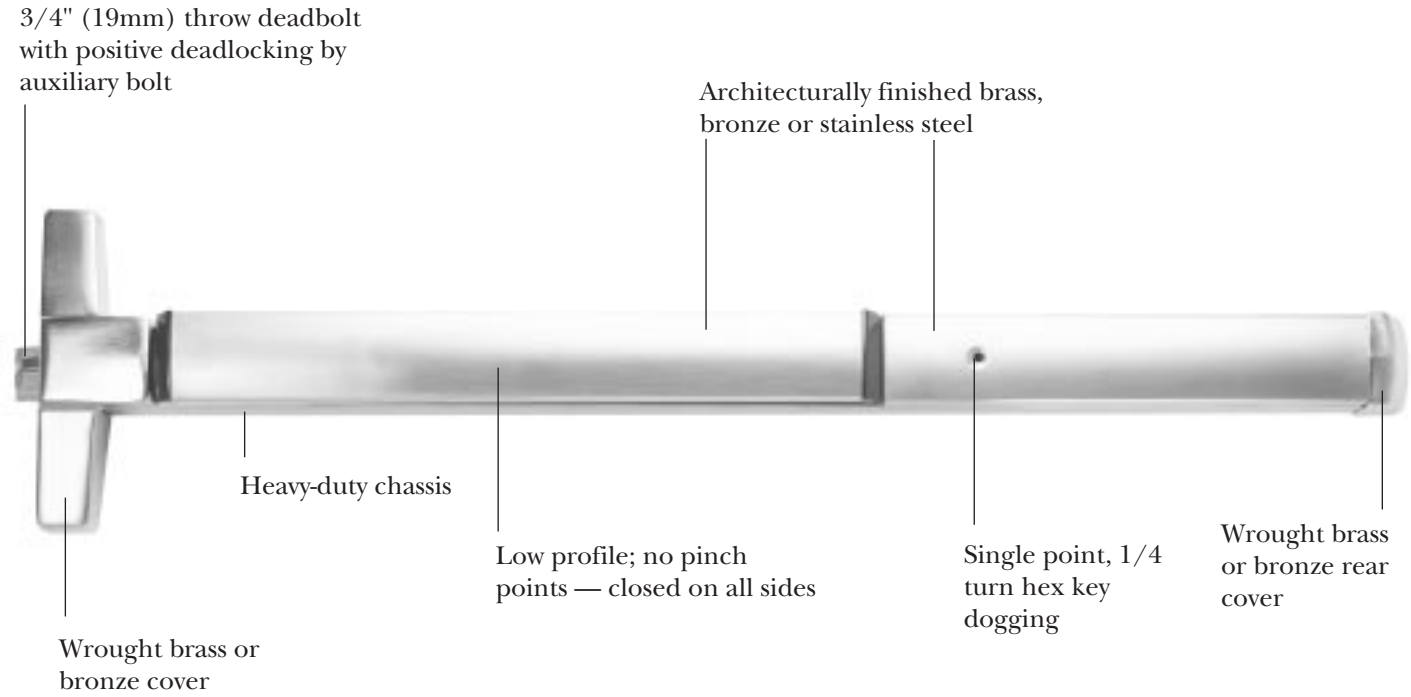

Vector Forces

In terms of an exit device, vector forces mean that pressure applied to the door results in a force against the stop and the frame, resulting in door/frame separation. The standard pullman latchbolt applies 280 pounds of force against the frame from a 400-pound pull on the door.

The SecureBolt™ exit device only applies 63 pounds of force against the frame from a 400-pound pull on the door. Less force means the door and frame do not separate, providing a higher level of security, as the door cannot be pulled open.

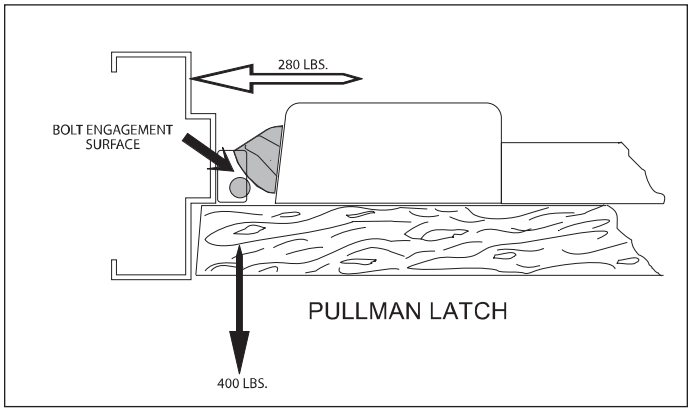

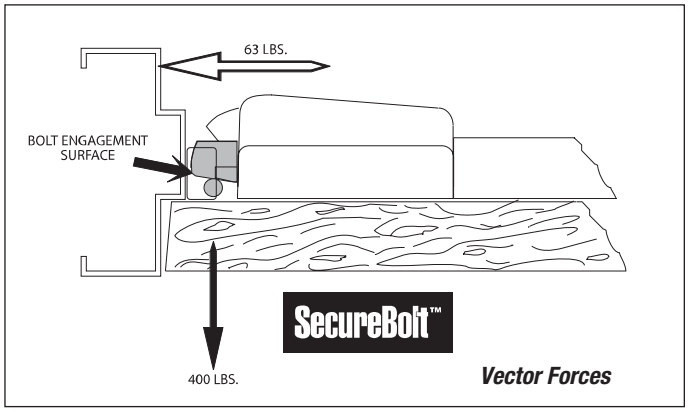

Vector Forces

ED4200 Narrow Stile Rim Exit Device

Features

Handing
Device non-handed.
Trim handed.

Bar Length
Easily field cut to size.
Standard: 36" bar fits 30"- 36" (762mm-914mm) door.
Optional: 24" bar fits 24" (610mm) door; specify W024.
Optional: 48" bar fits 36"- 48" (914mm-1219mm) door; specify W048.

Door Thickness
1-3/4" (44mm) standard.
Optional: 2" (51mm); specify D200.
Optional: 2-1/4" (57mm); specify D214.

Stile
Minimum width 2" (51mm).

Latchbolt
3/4" (19mm) throw, pullman type with stainless steel deadlocking latch.

Materials
Heavy-duty cold-forged steel chassis; heavy-gauge steel mechanisms, electroplated for corrosion resistance; finished parts are brass, bronze or stainless steel; stainless steel springs; nylon bearings.

Projection
3-1/4" (83mm) active, 2-3/4" (70mm) dogged.

Dogging
Standard: single point 1/4 turn hex key dogging.
Optional: less dogging; specify M51.
Optional: cylinder dogging; specify M52.
Optional: electric dogging; specify M97.

Fasteners
Standard: machine screws.
Optional: sex nuts and bolts; specify M54.

Strike
Surface mounted 3/8" (10mm) diameter roller strike, complete with positive locking plate and shims.

Functions and Trims
Through-bolted lever, knob, pull, thumbturn and thumbpiece trims available with wide range of functions; see Trims and Functions, page 14.

Cylinders
Cylinder not included unless specified. See Quick Codes, page 32.

Removable Mullion
See Mullions, page 27.

Shim Kit
Optional for mounting device over raised vision light molding; specify M58.

Applications and Listings
See page 3.

Warranty
Five-year limited.

Certification/Compliance

ANSI
Meets A156.3, Type 4, Grade 1.
Meets A117.1 Accessibility Code.

UL /cUL
All devices listed for safety as panic hardware; devices comply with UL 305 standards for panic hardware. UL symbol on active case cover indicates listing.

California State Reference Code
This product has been approved by the California State Fire Marshal pursuant to section 13144.1 of the California Health and Safety Code.

NFPA
All exit devices comply with NFPA 101 Life Safety Code.

ADA
Exit devices, lever trims and pulls comply with Americans with Disabilities Act.

Finishes

BHMA 605	**Bright Brass**
BHMA 606	**Satin Brass**
BHMA 611	**Bright Bronze**
BHMA 612	**Satin Bronze**
BHMA 613	**Dark Oxidized Satin Bronze, oil rubbed**
BHMA 625	**Bright Chromium Plated**
BHMA 626	**Satin Chromium Plated**
BHMA 629	**Bright Stainless Steel**
BHMA 630	**Satin Stainless Steel**

ED4200 Narrow Stile Rim Exit Device

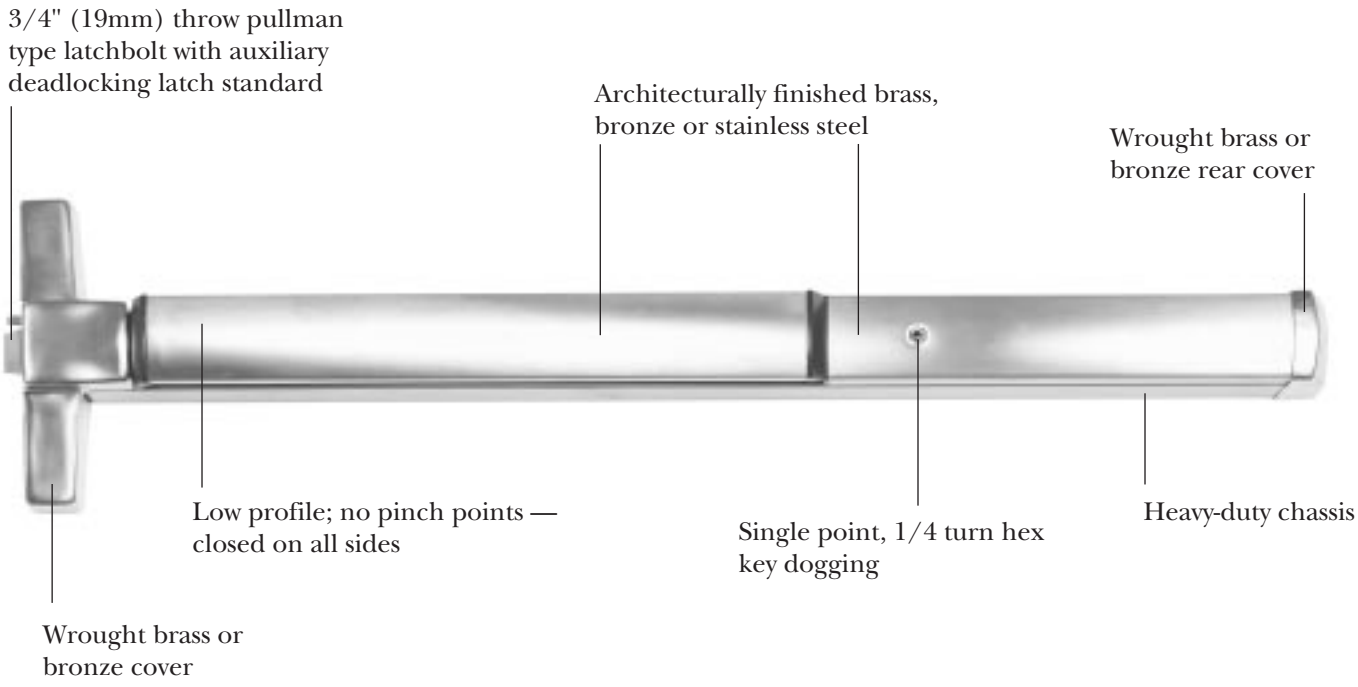

ED4400 Narrow Stile Surface Vertical Rod Exit Device

Features

Handing
Device is handed but easily field reversible. Trim handed.

Bar Length
Easily field cut to size.
Standard: 36" bar fits 30"- 36" (762mm-914mm) door.
Optional: 24" bar fits 24" (610mm) door; specify W024.
Optional: 48" bar fits 36"- 48" (914mm-1219mm) door; specify W048.

Door Thickness
1-3/4" (44mm) standard.
Optional: 2" (51mm); specify D200.
Optional: 2-1/4" (57mm); specify D214.

Stile
Minimum width 2" (51mm).

Door Height
Standard: Top rod for 7' door.
All top rods easily field cut to size.
Optional door heights available; see Quick Codes, page 32.

Latchbolt
Top: 3/4" (19mm) throw, pullman type with automatic deadlatching.
Bottom: 5/8" (16mm) throw deadbolt, held retracted during door swing.

Vertical Rods
1/2" O.D. tubular brass, bronze or stainless steel with rod guides.

Materials
Heavy-duty cold-forged steel chassis; heavy-gauge steel mechanisms, electroplated for corrosion resistance; finished parts are brass, bronze or stainless steel; stainless steel springs; nylon bearings.

Projection
3-1/4" (83mm) active, 2-3/4" (70mm) dogged.

Dogging
Standard: single point 1/4 turn hex key dogging.
Optional: less dogging; specify M51.
Optional: cylinder dogging; specify M52.
Optional: electric dogging; specify M97.

Fasteners
Standard: machine screws.
Optional: sex nuts and bolts; specify M54.

Strike
Top: Adjustable roller strike with positive locking plate and shims.
Bottom: flush mounted.
Optional strikes available; see Options and Accessories, page 28.

Functions and Trims
Through-bolted lever, knob, pull, thumbturn and thumbpiece trims available with wide range of functions; see Trims and Functions, page 14.

Cylinders
Cylinder not included unless specified. See Quick Codes, page 32.

Shim Kit
Optional for mounting device over raised vision light moding; specify M58.

Applications and Listings
See page 3.

Warranty
Five-year limited.

Certification/Compliance

ANSI
Meets A156.3, Type 5, Grade 1.

UL /cUL
All devices listed for safety as panic hardware; devices comply with UL 305 standards for panic hardware. UL symbol on active case cover indicates listing.

California State Reference Code
This product has been approved by the California State Fire Marshal pursuant to section 13144.1 of the California Health and Safety Code.

NFPA
All exit devices comply with NFPA 101 Life Safety Code.

ADA
Lever trims and pulls comply with Americans with Disabilities Act.

Finishes

BHMA 605	**Bright Brass**
BHMA 606	**Satin Brass**
BHMA 611	**Bright Bronze**
BHMA 612	**Satin Bronze**
BHMA 613	**Dark Oxidized Satin Bronze, oil rubbed**
BHMA 625	**Bright Chromium Plated**
BHMA 626	**Satin Chromium Plated**
BHMA 629	**Bright Stainless Steel**
BHMA 630	**Satin Stainless Steel**

ED4400 Surface Vertical Rod Exit Device

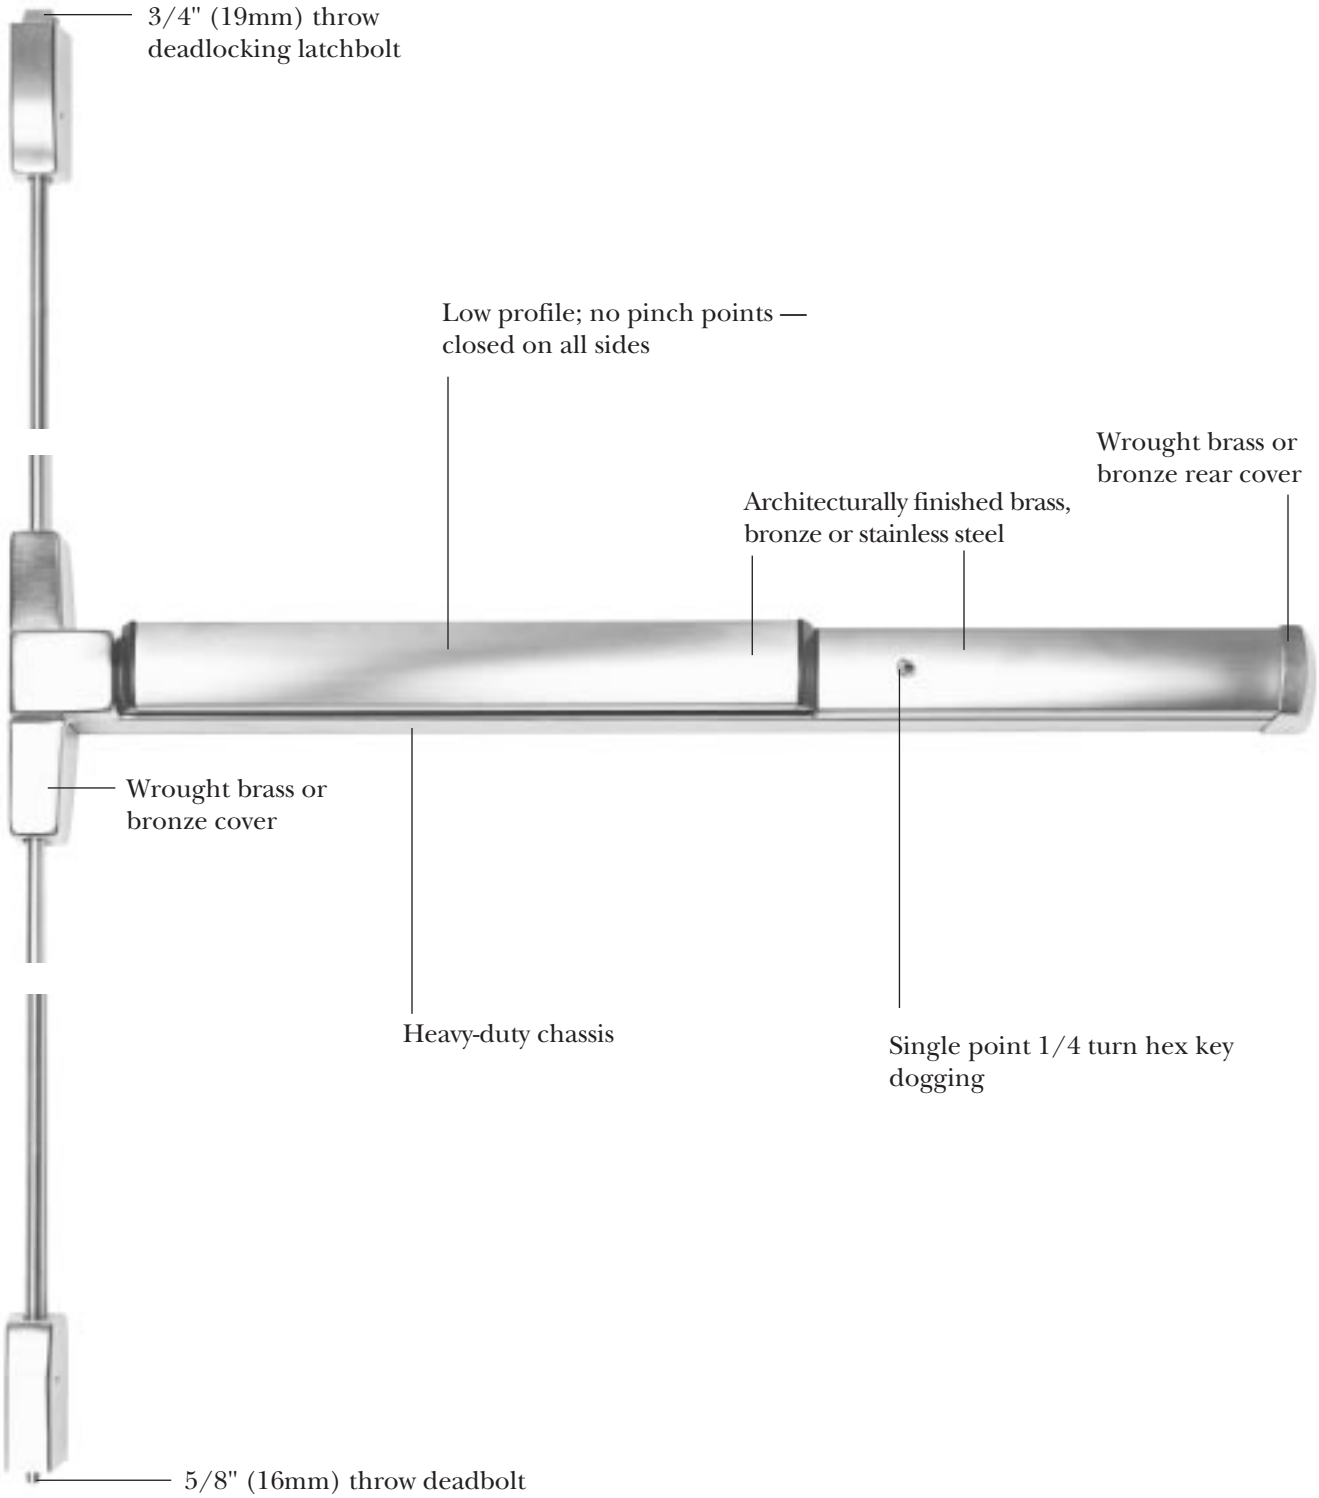

ED4800 Narrow Stile Concealed Vertical Rod Exit Device

Features

Handing
Device handed but easily field reversible. Lever trim handed.

Bar Length
Easily field cut to size.
Standard: 36" bar fits 30"- 36" (762mm-914mm) door.
Optional: 24" bar fits 24" (610mm) door; specify W024.
Optional: 48" bar fits 36"- 48" (914mm-1219mm) door; specify W048.

Door Thickness
1-3/4" (44mm) standard.
Optional: 2" (51mm); specify D200.
Optional: 2-1/4" (57mm); specify D214.

Stile
Minimum width 2" (51mm).

Door Height
Standard: Top rod for 8' door.
Telescoping rod assembly to accommodate various door heights.
Optional door heights available; see Quick Codes, page 32.

Latchbolt
Top: 3/4" (19mm) throw, pullman type with automatic deadlatching.
Bottom: 5/8" (16mm) throw deadbolt, held retracted during door swing.

Vertical Rods
1/2" O.D. tubing, electroplated for corrosion resistance.

Materials
Heavy-duty cold-forged steel chassis; heavy-gauge steel mechanisms, electroplated for corrosion resistance; finished parts are brass, bronze or stainless steel; stainless steel springs; nylon bearings.

Projection
3-1/4" (83mm) active, 2-3/4" (70mm) dogged.

Dogging
Standard: single point 1/4 turn hex key dogging.
Optional: less dogging; specify M51.
Optional: cylinder dogging; specify M52.
Optional: electric dogging; specify M97.

Fasteners
Standard: machine screws.
Optional: sex nuts and bolts; specify M54.

Strike
Top: adjustable roller strike with positive locking plate and shims.
Bottom: flush mounted.
Optional strikes available; see Options and Accessories, page 28.

Functions and Trims
Through-bolted lever, knob, pull, thumbturn and thumbpiece trims available with wide range of functions; see Trims and Functions, page 14.

Cylinders
Cylinder not included unless specified. See Quick Codes, page 32.

Shim Kit
Optional for mounting device over raised vision light moding; specify M58.

Applications and Listings
See page 3.

Warranty
Five-year limited.

Certification/Compliance

ANSI
Meets A156.3, Type 6, Grade 1.
Meets A117.1 Accessibility Code.

UL/cUL
All devices listed for safety as panic hardware; devices comply with UL 305. UL symbol on active case cover indicates listing.

California State Reference Code
This product has been approved by the California State Fire Marshal pursuant to section 13144.1 of the California Health and Safety Code.

NFPA
All exit devices comply with NFPA 101 Life Safety Code.

ADA
Exit devices, lever trims and pulls comply with Americans with Disabilities Act.

Finishes

BHMA 605	**Bright Brass**
BHMA 606	**Satin Brass**
BHMA 611	**Bright Bronze**
BHMA 612	**Satin Bronze**
BHMA 613	**Dark Oxidized Satin Bronze, oil rubbed**
BHMA 625	**Bright Chromium Plated**
BHMA 626	**Satin Chromium Plated**
BHMA 629	**Bright Stainless Steel**
BHMA 630	**Satin Stainless Steel**

ED4800 Concealed Vertical Rod Panic Exit Device

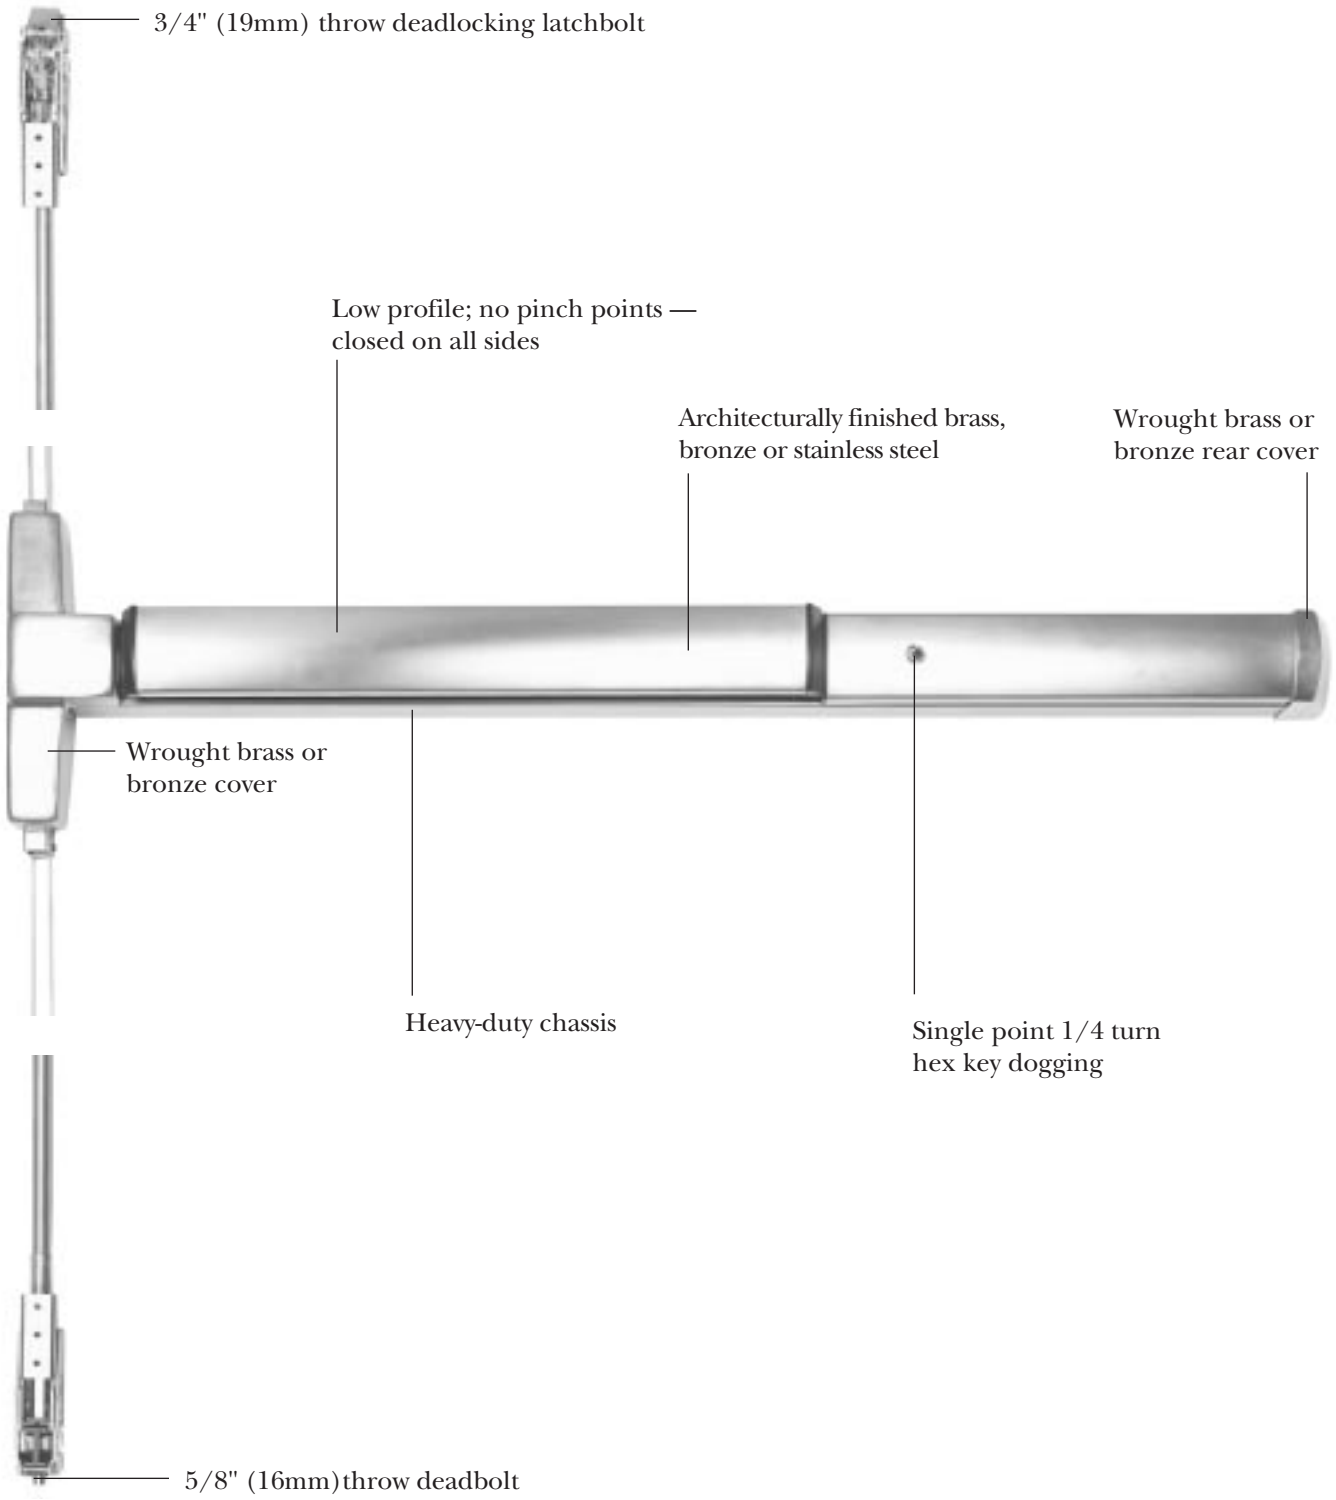

Corbin Russwin®

ED4000 Series Narrow Stile Pushpad Exit Devices

Trims and Functions

Features:

- Nine architectural finishes
- Lever designs allow for design continuum with Corbin Russwin line
- 1-year limited warranty

	Trim Designs	Passage ANSI No. 14	Dummy ANSI No. 02	Classroom* ANSI No. 08	Storeroom ANSI No. 09
Armstrong **A8** Lever: Cast Escutcheon: Wrought Cylinder: Rim		A810	A850	A855	A859
Citation **C8** Lever: Cast Escutcheon: Wrought Cylinder: Rim		C810	C850	C855	C859
Dirke **D8** Lever: Cast Escutcheon: Wrought Cylinder: Rim		D810	D850	D855	D859
Essex **E8** Lever: Cast Escutcheon: Wrought Cylinder: Rim		E810	E850	E855	E859
Lustra **L8** Lever: Cast Escutcheon: Wrought Cylinder: Rim		L810	L850	L855	L859
Newport **N8** Lever: Cast Escutcheon: Wrought Cylinder: Rim		N810	N850	N855	N859
Regis **R8** Lever: Cast Escutcheon: Wrought Cylinder: Rim		R810	R850	R855	R859
Princeton **PR8** Lever: Cast Escutcheon: Wrought Cylinder: Rim		PR810	PR850	PR855	PR859

*Note: Classroom function trims can be converted to Storeroom function by a simple field adjustment.

ED4000 Series Narrow Stile Pushpad Exit Devices

Trims and Functions

Features:

- Nine architectural finishes
- Lever designs allow for design continuum with Corbin Russwin line
- 1-year limited warranty

	Trim Designs	Passage ANSI No. 14/15/16	Dummy ANSI No. 02	Classroom ANSI No. 05/08/11	Storeroom/ Nightlatch ANSI No. 03/06/09/12
	Global **G8** Knob: Wrought Escutcheon: Wrought Cylinder: Rim		**G810 (14)**	**G850**	**G855 (08)**	**G859 (09)**
	Plate **F4** Plate: Wrought Cylinder: Rim		**N/A**	**F450****	**N/A**	**F457** (03)**
	Pull/Thumbpiece **T14** Pull: Cast Escutcheon: Wrought Cylinder: Rim		**T1410 (15)**	**T1450****	**T1455 (05)**	**T1457** (06)**
	Pull **P10** Pull: Extruded Escutcheon: Wrought Cylinder: Rim		**N/A**	**P1050****	**N/A**	**P1057** (03)**
	Plate x Thumbturn **08** Plate: Wrought Thumbturn: Cast Cylinder: Rim		**0810 (16)**	**N/A**	**0855 (11)**	**0859 (12)**
	Pull x Thumbturn **014** Pull: Cast Thumbturn: Cast Cylinder: Rim		**01410 (16)**	**N/A**	**01455 (11)**	**01459 (12)**
	Key Only **K1** Note: Available with cylinder option only. Ex: K157 x 6P		**N/A**	**N/A**	**N/A**	**K157** (03)**

Note: Classroom function trims can be converted to Storeroom function by a simple field adjustment.
** Not recommended for use with surface or concealed vertical rod exit devices.
* Pull only, no thumbpiece.

Electrified Exit Devices

The Corbin Russwin ED4000 series electrified exit devices offer a complete range of options that may be integrated into the monitoring security and alarm systems of most buildings. The continuum of appearance is maintained, as well as the security and function of the ED4000 mechanical exit device.

List No.	Exit Device Description	Available Options						
		M61	M91	M92	M93	M94	M97	D
ED4200	Rim Exit Device	x	x	x	x	x	x	x
ED4200S	Rim SecureBolt™ Device	x	x	x	x	x	x	x
ED4400	Surface Vertical Rod	x	x	x	x	x	x	x
ED4800	Concealed Vertical Rod	x	x	x	x	x	x	x

Electrified Hardware Option Descriptions

M61	Alarm Option
M91	Bolt Monitor
M92	Touchbar Monitor
M93	Trim Monitor
M94	Electric Latch Pullback
M97	Electric Dogging
D	Delayed Egress

Notes:

1. The following options cannot be ordered together on the same device:

D x M52	M52 x M61
D x M61	M52 x M97
D x M92	M61 x M92
D x M94	M94 x M97
D x M97	ED4400 x M61 with Monitors M91, M92 or M93

2. When ordering a Surface Vertical Rod exit device with the D option (ED4400D), rod and latch quards (provided by others) must be used.

Electric Latch Pullback - M94

Continuous-duty solenoid retracts the latchbolt(s) for momentary or maintained periods of time. Latch Pullback provides a remote means of unlocking exit devices.

Application

SecureBolt™ Exit Devices
Rim Exit Devices
Surface Vertical Rod Exit Devices
Concealed Vertical Rod Exit Devices

Listings

UL listed for Panic Exit Hardware.

Electrical Specifications

Requires 781N Controller (120VAC or 240VAC input, output sequencer for one or two devices). No substitutes; using other power sources voids warranty. Requires a 4-wire electrical transfer pivot or hinge. (see page ED4000.21)

Solenoid

A dual retraction/holder type solenoid.

10 Amp in rush @ 24VDC to 28VDC
(.172 Amp holding-continuous duty.)

Device bolts remain retracted for as long as the device is energized. Removal of power returns the device to the life safety, self-latching mechanical mode.

Interface with central or local fire alarm system, automatic door operators, access control systems, security alarm systems, and blow open door systems.

Note: This feature is not available with electric dogging (M97) or delayed egress (D) on the same device.

Ordering

Specify quick code M94.

Electric Dogging - M97

This electronic feature will provide continuous dogging when power is applied and the push bar is depressed manually. Interruption or removal of the power will release the pushbar and return the exit device back to normal operation.

Application

SecureBolt™ Exit Devices
Rim Exit Devices
Surface Vertical Rod Exit Devices
Concealed Vertical Rod Exit Devices

Listings

UL listed for Panic Exit Hardware.

Electrical Specifications

.35 Amps @ 24VDC-28VDC continuous duty (2) 36 volt holding magnets holding force (86 lbf. total)

Note: This feature is not available with latch pullback (M94), delayed egress (D) or cylinder dogging (M52) on the same device.

Ordering

Specify quick code M97.

Delayed Egress Exit Device

The delayed egress option provides additional security and safety in a strong line of panic hardware. The delayed egress exit device is an electromechanical device used to secure interior or exterior openings. The option is available for rim, SecureBolt™ and concealed vertical rod devices in all standard finishes.

Operation

The exit door is normally closed and latched. The Delayed Egress Exit Device "D" secures the door in the locked mode with the solid Red LED indicating locked mode status. Depressing the push pad for less than 3 seconds will sound the nuisance beep without initiating the alarm. Depressing the pushpad for 3 seconds or longer will initiate an irreversible local audible beeping tone and a visual amber indicator until the device releases. The person depressing the exit bar is denied egress for 15 or 30 seconds and security personnel are alerted. After the delay time of 15 or 30 seconds the device releases, the LED changes to Green, and the alarm changes to a steady tone which continues to alarm until manually reset by key. The remote monitoring contact outputs can be used to alert security personnel.

Note: The 15-second time delay is standard. 30-second time delay is optional (may be accepted by local jurisdiction).

Applications

- For use on hollow metal interior or exterior doors.
- Complies with NFPA 101 "Code For Safety To Life From Buildings And Structures" by National Fire Protection Association.
- BOCA options available to comply with National Building Code requirements. BOCA option is not suitable for installations in accordance with NFPA 101.
- 1-3/4" door thickness standard; 2" and 2-1/4" optional; specify D200 or D214 when ordering.
- Standard 36" device fits 36" doors only. Device cannot be cut less than 36".
- Option W048 fits doors 42" – 48". Devices cannot be cut less than 42".

Listing

- UL/cUL Listed
  - Controlled Exit Panic Devices (FULA/FULA7)
  - Special Locking Arrangements (FWAX/FWAX7)
- BHMA (ANSI A156.3 and ANSI A156.24) Directory of Certified Exit Devices

Specifications

Input Voltage: 24VDC (+/- 10%) Regulated and filtered.

Power Consumption

- Standard Device: 500 mA

Standard Features

Key Switch Operation:

- Normal: The system is armed by applying power to the device (solid Red LED). Depressing the pushpad for more than the nuisance delay time starts the exit delay cycle.
- Bypass: Turning the key switch clockwise to the bypass position allows immediate egress without alarming. The bar functions as a standard exit device. (Red LED flashes slow.)
- Reset/Delay: Used to reset device after the factory set 15 or optional 30-second delay cycle has timed out. If the device is armed, turning the key switch counterclockwise to the reset mode will release the device without alarm for egress and will rearm after 10 seconds. (Red LED flashes quickly.)

Local Visual Status Indicator:

- RED: The exit device is secure and the delayed egress circuitry is energized.
- AMBER: The egress cycle has started, indicated by an irreversible local audible beeping tone.
- GREEN: Exit device is in alarm and has released.

Nuisance Delay Time:

Depressing for less than 3 seconds sounds an audible beep without activating the irreversible alarm sequence. (Immediate alarm can be selected by removing a jumper on the control board.)

Internal Alarm Siren:

When the exit device is armed, depressing the push pad initiates the internal 85db alarm siren.

Remote Control Inputs:

- Remote Reset: Accepts a momentary contact (keyswitch, pushbutton, etc.) to reset the unit during alarm or allows momentary egress (10 seconds) when the unit is armed.
- Remote Bypass: Accepts a momentary contact to put the unit in a maintained bypass operation. The exit device functions as a standard device.

Alarm Outputs:

Two sets of normally open and normally closed contacts. Contacts change only during alarm status. One set of contacts changes when device delay cycle has started (Alarm). One set of contacts changes when device has released (Secure).

Door Sign:

Door sign per code included.

Note: This feature is not available with,
M52 Cylinder Dogging
M61 Alarm Option
M92 Touchbar Monitor
M94 Electric Latch Pullback
M97 Electric Dogging

How to Order

Specify "D" suffix after device.
Example: ED4200SD

Delayed Egress Exit Device

Options

Bolt Position Monitor M91:
SPDT (Single Pole Double Throw) switch that monitors the position of the latchbolt or vertical rods. To order, specify M91.

Outside Trim Monitor M93:
Used when outside trim is desired to be used with an external door position switch (by others) input. This switch will allow Bypass (disarms device) when the trim is used for ingress. The device requires setting after entry by means of the keyswitch on the device or a remote switch. To order, specify M93.
Note: If an external DPS is not used, standard trim will allow entry without affecting the device in an armed mode. The device will only be affected when the touchbar is depressed.

NFPA 101 Requirements:
30 Second Delay M88
Upon depressing the pushpad for 3 seconds or longer, the device will sound an audible beeping tone and allow the door to be opened after 30 seconds. The tone will then change to a continuous alarm until reset. Resetting of the alarm and re-arming of the device is accomplished by manual means only.
To order, specify M88.
Note: Where approved by the authority having jurisdiction, a delay not exceeding 30 seconds shall be permitted.

BOCA Requirements:
BOCA 15 Second Delay M89
BOCA 30 Second Delay M90
Upon depressing the pushpad for 1 second or longer, the device will sound an audible beeping tone and allow the door to be opened within 15 (or 30) seconds. The tone will then change to a continuous alarm until rest. Resetting of the alarm and re-arming of the device occurs automatically once the door has been returned to the closed position for 30 seconds. The 30-second re-arming timer will re-start if the pushpad is depressed or the door is re-opened before actual re-arming of the device occurs. A DPS (Door Position Switch) is required for the BOCA option. To order, specify M89 (BOCA 15 second) or M90 (BOCA 30 second).
Note: BOCA option is not suitable for installations in accordance with NFPA 101.

Required Accessories

Power Supply:
A regulated and filtered power supply with a Fire Alarm interface is required. 1 Amp minimum @ 24VDC per device. Special options will require more amperage. Consult factory.
To order, specify:
- FABPS-24-1 (1 AMP)
- FABPS-24-2 (2 AMP)
- FABPS-24-4 (4 AMP)

Power Transfer:
Allows the power to make the transition from frame to door without pinching or removal of insulation. Optional power transfer: FAEPTL – concealed transfer for up to and over 120° swing doors. To order specify Part No. 704F28.
Consult Folger Adam® catalog for additional recommended power supplies and accessories.

Trims
See Trims and Functions, pages 14-15.

Cylinders
Utilizes a 1-1/8" mortise cylinder with an A02 cam. Cylinder not included unless specified. See Quick Codes, page 32.

Warranty
Exit devices carry a five-year limited warranty. Electronic components and trim carry a one-year limited warranty.

M61 Option and ED40AK Alarm Kit

Activation
Alarm is armed by turning key clockwise. Low audible chirp indicates alarm has been activated. 20-second delay allows egress before alarm is set (selectable, 7, 10, 15 and 20) Alarm will sound when the exit device pushpad is depressed.

Continuous Alarm Mode
Alarm sounds continuously when the exit device pushpad is depressed. Alarm must be manually reset by keyswitch. Dip switch setting allows auto reset from 2, 5 or 10 minutes. LED flashes after device has reset.

Low Battery Warning
Audible chirp every 30 seconds.

Warning Decal
"EMERGENCY EXIT–ALARM WILL SOUND" provided.

REX and Passage Delay
A 7, 10, 15 or 20-second delay (after arming) permits egress (by turning key clockwise).

Alarm Shunt
Shunt alarm input for devices with signal, outside trim monitors (M91 & M93)or card access.

Power Requirements
One 9-volt battery (included).

Alarm Strength
105db @ 10 feet.

Arm/Disarm
Requires one 1-1/8" mortise cylinder with an A02 cam. Clockwise turn arms the alarm, counterclockwise turn disarms or silences the alarm. Low audible chirp indicates alarm has been activated.

Device Status
A Red LED indicator will illuminate every 30 seconds when the alarm is armed. DIP switch allows LED to be changed to green if desired.

Tamper Resistant
Built-in safety monitor sounds alarm when tampering occurs.

Cylinders
Cylinder not included unless specified. See How to Order, page 32.

Door Width
Available for 36"-48" devices only. Not available with devices less than 36".

Quick Code
M61

Kit
Available in kit form for field retrofit. Order ED40AK.

Exceptions
Dogging not available with M61 option and ED40AK alarm kit. The ED40AK for the ED4000 series exit devices cannot be retrofitted in the field to ED4400 series surface vertical rod exit devices.

The alarm option is available for the surface vertical rod devices by factory order only. To order, add the quick code suffix M61 to the device number; for example, ED4400 x M61.

Please note, in accordance with Corbin Russwin's standard limited warranty, any attempt to retrofit the ED40AK to a surface vertical rod exit device will void the warranties for these products.

Surface vertical rod exit devices with M61 alarm option cannot be ordered with M91, M92 or M93 monitors.

M61 alarm option is not available with delayed egress (D).

How to Order

Ordering example for Exit Device

ED4400	626	M61
↓	↓	↓
Device	Finish	Quick Code for Alarm Option (Cylinder Not Included)

Ordering Example for Alarm Kit Only

ED40AK	626	W048
↓	↓	↓
Alarm Kit	Finish	Door Width (Cylinder Not Included)

781N Series Controller

Operation

Designed to control one or two electric latch pullback M94 exit devices. Equipped with two 20-second timers which can operate the exit devices together or independently. Requires a momentary or timed, dry contact input and can be interfaced with access control systems, automatic door operators, "blow open" applications and has provisions for Fire Alarm systems.

Features

- 2 control inputs. Accepts normally closed dry contacts for device activation from a keyswitch, pushbutton, access control or fire alarm system.
- 2 normally open control outputs for automatic door operators
- 2 M94 device outputs
- Fire Alarm Interface input
- 12VDC output for audible or LEDS .25 Amp
- 24VDC output for audible or LEDS .25 Amp

Wiring

Up to 40 feet: 16 AWG wire
Up to 60 feet: 14 AWG wire
Up to 100 feet: 12 AWG wire

Electrical Specifications

- 120VAC or 240VAC 60 Hz Power input
- 10 Amp inrush for 100 milliseconds
- Holding voltage @ 28 volts unregulated

Listings

Listed as an Exit Device Control Unit to UL 294 requirements.

Note: The 781N is the only power source to be used with the M94 option. Using any other power supply will void the warranty and cause possible damage to the exit device.

Ordering

781N-120 (120VAC input)
781N-240 (240VAC input)

781N Series Controller

FABPS-24-2 Power Supply

Provides 2 Amps of output current at 24VDC and can control a total of 5 Electric Dogging Devices. A separate switching device (key switch or push button) must be used to control the locking device.

Specifications

- 120VAC Input Power
- 24VDC @ 2 Amp Output
- Fire Alarm Interface

FABPS-24-4 Power Supply

Provides 4 Amps of output current at 24VDC and can control a total of 10 Electric Dogging Devices. A separate switching device (keyswitch or push button) must be used to control the locking device.

Specifications

- 120VAC Input Power
- 24VDC @ 4 Amp Output
- Fire Alarm Interface

FAEPTL

Concealed power transfer for over 120° swing doors. Installs in door and frame edges. Supports wires up to .25" (6mm) thick, and works with doors hung with butt hinges, continuous hinges and pivots. To order, specify Part No. 704F28.

FAEPT
Doors up to 120º swing.

FAEPTL

Monitors - M91, M92, M93

Operation

Monitors are used to indicate the authorized and unauthorized use of an opening or to signal and control other opening hardware, such as magnetic locks. Each monitoring device is equipped with one internal single-pole double-throw (SPDT) switch per monitor.

Bolt Position Monitoring - M91

Provides indication of the position of the deadlatch or vertical rods. Used with security systems to monitor the deadlatch in rim , securebolt devices and rods in CVR & SVR devices.

Application

See chart on page 16.

Listings

UL listed for Panic Exit Hardware.

Electrical Specifications

5 Amps @ 28VDC SPDT contacts.

Ordering

Specify quick code M91.

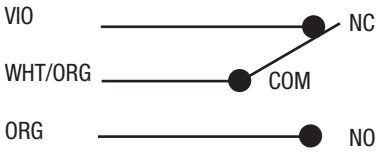

Touchbar Monitoring - M92

Provides indication of the pushpad being depressed. Used as a request to exit to shunt alarm systems, release electromagnetic locks or monitor egress.

Application

See chart on page 16.

Listings

UL listed for Panic Exit Hardware.

Electrical Specifications

4 Amps @ 250 VAC SPDT contacts.

Ordering

Specify quick code M92.

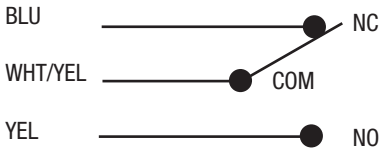

Outside Monitoring or Signaling - M93

Provides indication of the device being operated from the outside. Used as a request to enter signal switch to shunt alarms; also used to monitor entry.

Application

See chart on page 16.

Listings

UL listed for Panic Exit Hardware.

Electrical Specifications

5 Amps @ 28VDC SPDT contacts.

Ordering

Specify quick code M93.

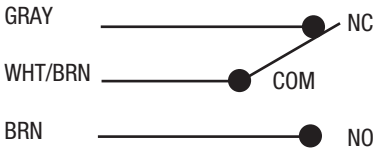

Power Supplies

Operation

Power supplies are designed to provide reliable filtered and regulated power for long life to a variety of electrified hardware components. All modular power supplies are designed to meet UL 1481 Standards. Recommended for the M97 and delayed egress exit devices.

Features

- Fire panel emergency release input
- PC Board mounted system LED indicator
- Regulated and filtered with input and output protection
- Battery charging is provided from a separate output terminal

Ordering

Power supplies are available through Corbin Russwin. To order, specify:

Electrical Specifications

- Inputs: 115VAC @600mA (230 VAC optional), 50Hz/60hZ
- Outputs: 24 VDC @ 1 Amp, 2 Amp or 4 Amp, Filtered and regulated output

Listings

- UL & cUL listed 1012 General Purpose Power Supply
- Fire & Burglar Alarm Power Supply Unit URT2
- Releasing device Accessory SYSW
- Access Control Systems Units ALVY
- Burglar Alarm Systems Power Supply APHY

Applications

- D – Delayed Egress
- M97 – Electric Dogging

Model	Enclosure	Input	Output
FABPS-24-1	12" (304mm) x 9" (229mm) x 4" (102mm)	115VAC, 50/60 Hz.	1.0 Amp @ 24 VDC
FABPS-24-2	14" (356mm) x 14" (356mm) x 4" (102mm)	115VAC, 50/60 Hz.	2.0 Amp @ 24 VDC
FABPS-24-4	15" (381mm) x 18" (457mm) x 6" (152mm)	115VAC, 50/60 Hz.	4.0 Amp @ 24 VDC

Exit Controls and Switches

Key Switches



FAMKA

FAMKA - (1) SPDT Maintained
FAMK - (1) SPDT Momentary
FAMKN - (1) SPDT Momentary NS
FAMK2 - (1) DPDT Momentary
FAMKPZ xMKS - (1) SPDT Momentary with audio Double Gang x Additional Switch

Note: All keyswitches come standard with 12/24 VDC Bi-Color LED.

Specifications

- Keyswitch for operation using a standard 1-1/4" mortise cylinder (cylinder not included).
- Contact Rating 5 Amps @ 12-24VDC.
- SPDT 3-position.

Push Button



FAPB2



FAPB3

FAPB3 - (1) DPST Momentary
FAPB3A- (1) DPST Maintained (Alt. Action)
FAPB2 - (1) SPDT Momentary
FAPB3EA - (1) DPST Alternate
FAPB2 - (1) DPST Remote Momentary

Specifications

- 3 Amps @ 12-24 VDC

Indicator

FAZLP - (1) Red and Green LED on narrow gang plate.

Audible/Visual Annunciators



FAPZ1

FAPZ1 - Sonalert 90lb @ 2ft. 12-24VDC
Mounted on one gang stainless steel plate.

Digital Entry

FADK-11 - Digital Keypad - 4 user
FADK-26SS - Digital Keypad NS - 59 user - SS Finish
FADK-26BK - Digital Keypad NS - 59 user - Black Finish

Power Transfers

FATSB B-C - Door Cord

Latch Pullback - M94 Option

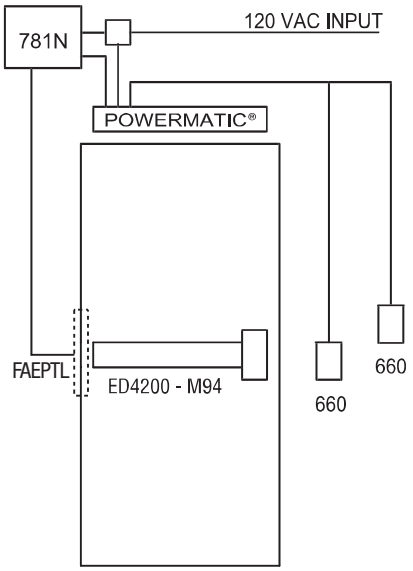

Components
ED4200 x M94 Latch Pullback Exit Device - Corbin Russwin
781N Power Control Unit - Corbin Russwin
6900 Operator - Norton®
660 Push Pads - Norton®
FAEPTL - Corbin Russwin

Operation
Operation of Push Pads from either side of door will activate the 781N Controller for the Latch Pullback Exit Device. An internal timer on the 6900 will also provide length of time door is open and latch being retracted. Door operator also acts like standard closer when opened manually.

Electric Dogging & Touchbar Monitoring Switch - M97 & M92

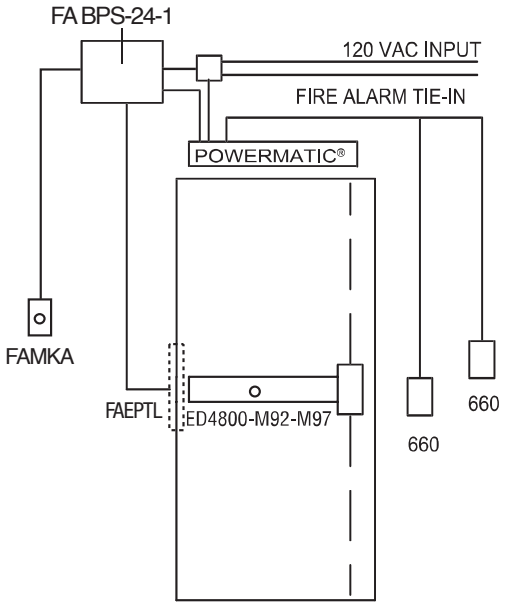

Components
ED4800 x M92 x M97 with Cyl. + Bar Monitor & Electric Dogging - Corbin Russwin
6900 Operator - Norton®
660 Push Pads - Norton®
FAEPTL - Corbin Russwin
FABPS-24-1 - Corbin Russwin
FAMKA Key Switch - Corbin Russwin

Operation
Operation of Electric Dogging combined with the Door Monitor Switch will enable Push Pads for operation of the 6900. A maintained keyswitch will control the activation of the electric dogging which is powered by the FABPS-24-1 Power supply. A Fire Alarm Tie-In, if required, will release the dogging and let the operator work in manual mode when activated. (NOTE: Electric Dogging is not automatic like Latch Pullback. It requires the bar to be pushed in manually the first time after applying power.)

Latch Pullback - M94 Option with Norton® Powermatic® Door Operator

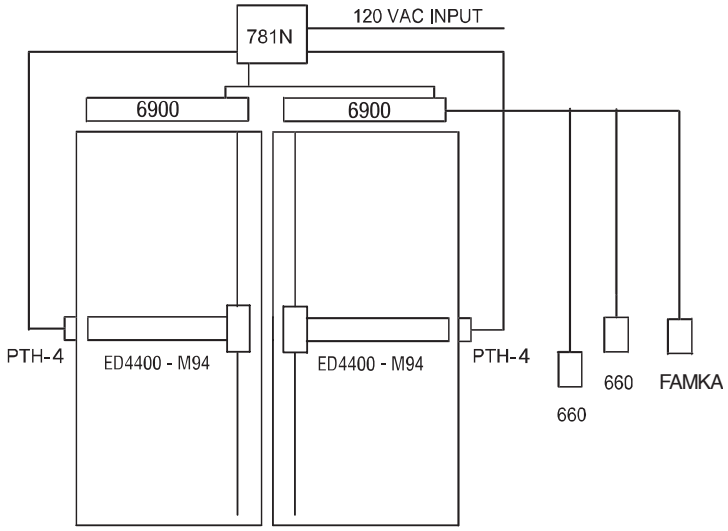

Components
ED4400 x M94 Latch Pullback Exit Device - Corbin Russwin
781N Power Control Unit - Corbin Russwin
6900 Operator - Norton®
660 Push Pads - Norton®
PTH-4 Power Transfer Hinge - Folger Adam®
FAMKA Keyswitch - Corbin Russwin

Operation
Activation and operation of Push Pads from either side of door will be controlled by the FAMKA Maintained Keyswitch. The Push Pads will in turn activate the 781N Controller for the Latch Pullback Exit Device. An internal timer on the 6900 will coordinate and prevent the door from being opened before latch retraction takes place. Standard timers on the 6900 will also provide length of time door is open and latch being retracted. Door operator also acts like standard closer when opened manually.

Rim Device with Electric Strike

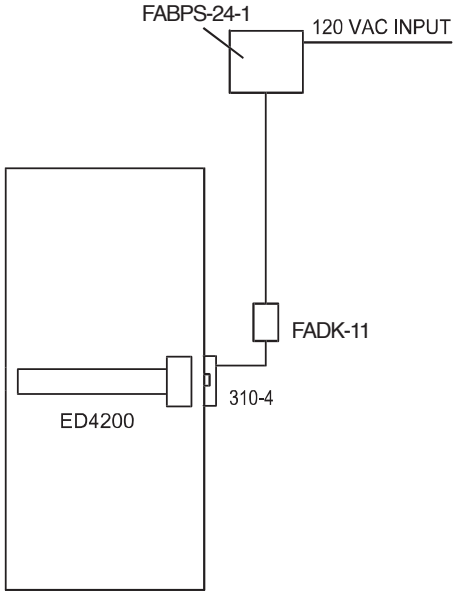

Components
ED4200 Exit Device - Corbin Russwin
FADK-11 Digital Keypad - Folger Adam®
310-4 Electric Strike - Folger Adam®
FABPS-24-1 Power Supply - Corbin Russwin

Operation
Operation of FADK-11 Digital Keypad will allow keyless entry from the non-protected side of opening. Free exit using the exit device from the protected side of the door.

Rim Exit Device with Delayed Egress Option on "Exit Only" Door

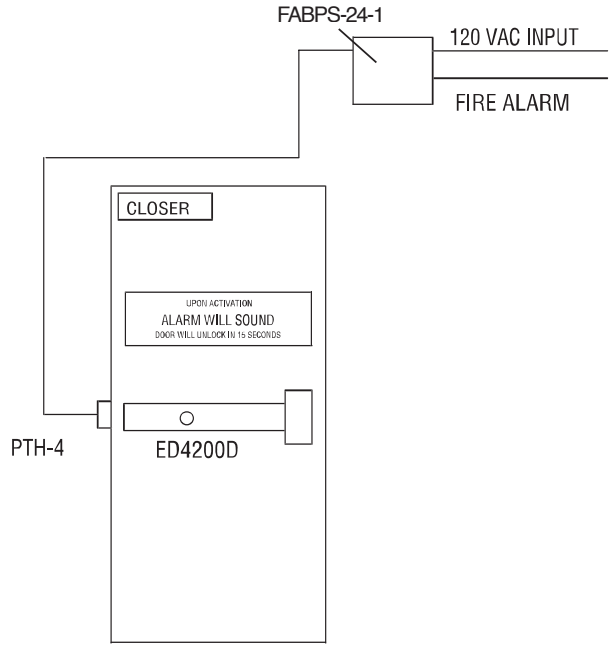

Components
ED4200D Delayed Egress Exit Device - Corbin Russwin
PTH-4 Power Transfer Hinge - Folger Adam®
FABPS-24-1 Power Supply - Corbin Russwin
Surface Door Closer - Corbin Russwin

Operation
Operation of the ED4200D Exit Device will sound an alarm and activate either a 15- or 30-second alarm sequence inside of the exit device. After this time period, the device will release the pushbar, making it active, and egress is possible. When the fire alarm is activated, power to the exit device will be interrupted, allowing free egress and mechanical latching. Authorized alarm bypass and reset is done through the built-in keyswitch located in the exit device.

Rim Exit Device - High Security Application M91, M92 and M93 Monitoring Switch Options With FAMSS-1C Door Position Switch

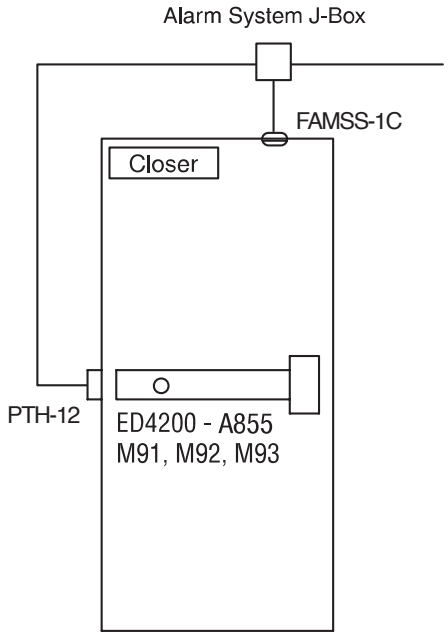

Components
ED4200 - A855 Nightlatch Trim - Corbin Russwin
- M91 Bolt Monitor Switch
- M92 Touchbar Monitor Switch
- M93 Trim Monitor Switch

FAMSS-1C Door Position Switch - Folger Adam®
PTH-12 Power Transfer Hinge - Folger Adam®
Surface Door Closer - Corbin Russwin

Operation
Operation of the ED4200 Exit Device with the M91, M92, M93 and FAMSS-1C can be used together or individually to sound an alarm, shunt an alarm, monitor the door's security or as a "Request to Exit" in conjunction with a magnetic lock.

808 Mullion

Used to install two Rim Exit Devices in a double door opening. May be quickly and easily removed when a full double door opening is temporarily required.

Materials and Finish

Extruded aluminum mullion, 1-1/4" x 3-1/2" x 8', supplied with two integral strikes, top and bottom mounting brackets, two sets of mullion stabilizers, and zinc-plated fasteners for metal frames and concrete floors. May be cut, drilled and tapped in the field for Rim Exit Devices. Available in 628 and 695 finishes.

Ordering

To order, specify Part No. 808 x Finish.

Mullion Stabilizer Kit

Controls the movement of the mullion. Recommended for openings over 7' high or whenever door movement must be minimized. Available in 628 and 695 finishes. Two sets supplied standard with all 808 mullions. To order separately, specify Part No. 653F11-1 x Finish.

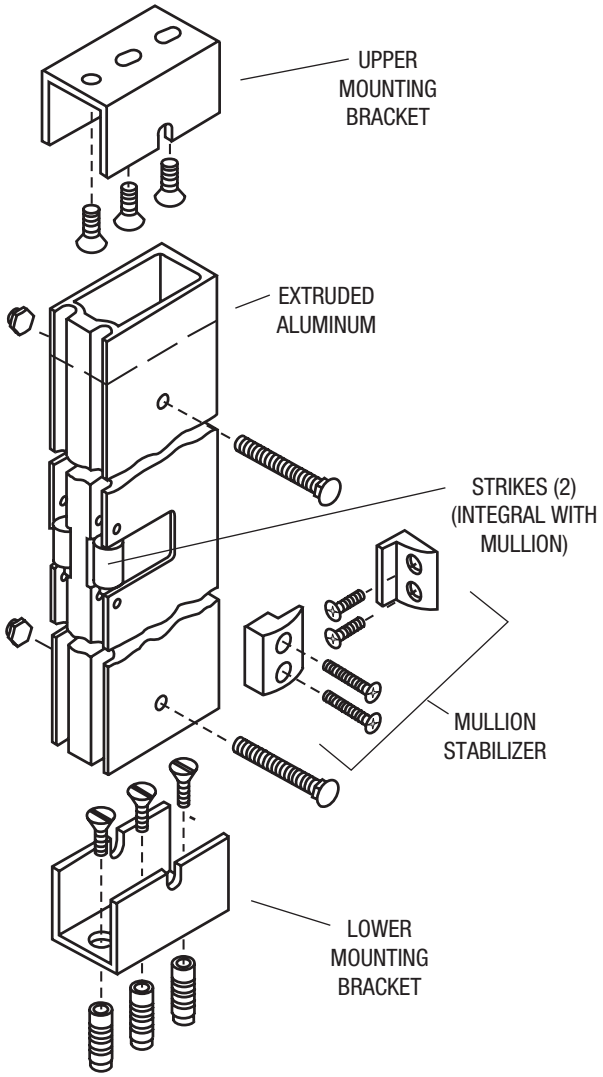

Shim Kits

Designed for mounting an exit device over raised vision light molding. Each kit contains two sets of 1/8" thick shims to shim a device 1/8" (3mm) or 1/4" (6mm). Black finish. To order with exit device, specify M58. To order separately, specify Part No.

Exit Device Type	Shim Kit Part No.
ED4200, ED4200S, ED4800	697F35-8
ED4400	697F36-8

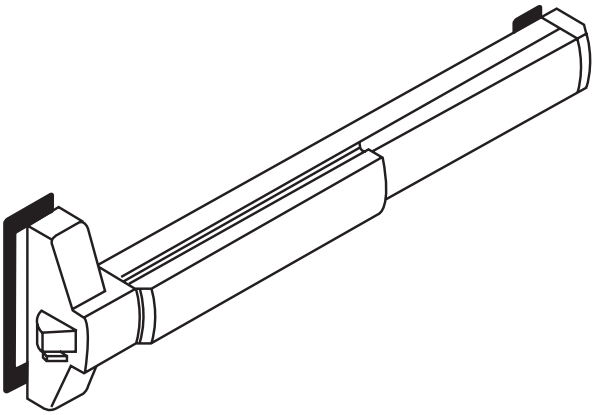

Cylinder Dogging Kits

Designed to convert a panic device from hex key dogging to cylinder dogging. To order cylinder dogging kit, specify Part No. x Finish below. Cylinder not included.

Bar Length	Cylinder Dogging Kit Part No.
36" (914mm)	653F13 x Finish
48" (1219mm)	653F14 x Finish

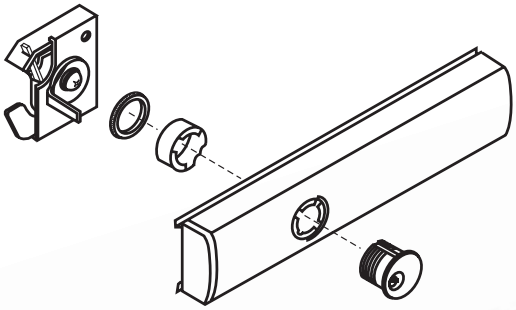

ED5000DB Inactive Bar

Non-operating dummy pushbar available for doors up to 48" wide. May be field cut for narrower doors. To order, specify ED5000DB x Finish.

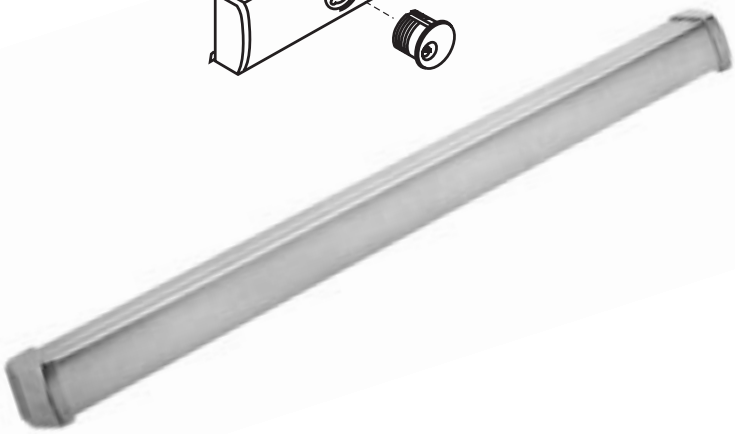

Surface and Concealed Vertical Rod Extension Kits

Used to extend the height of standard length rods supplied with ED4400 and ED4800 Series exit devices. Available in 2", 6" and 12" sizes. To order with exit device, see How to Order, page 31. To order separately, specify Part No. x Finish.

Rod Extension	Rod Extension Kit Part No.
2" (50mm)	655F15 x Finish
6" (152mm)	655F16 x Finish
12" (305mm)	655F17 x Finish

Rim Strike

(Screws Included)



Rim Strike

Standard on ED4200 and ED4200S devices, Supplied with two 1/16" (2mm) shims. For doors with 1/2" (13mm) or 5/8" (16mm) stop. Adjustable to compensate for shrinkage and swelling of door. 3" x 2" (76mm x 51mm). Black finish only. To order separately, specify 650F31-8.

Surface and Concealed Vertical Rod Strikes

(Screws Included)



Top Strike

Standard on ED4400 and ED4800 devices. Supplied with two 1/16" (2mm) shims and one 1/16" (2mm) locking plate. Adjustable to compensate for shrinkage and swelling of door. 1-9/16" x 15/16" (40mm x 24mm). Black finish only.

Bottom Strike

Standard on ED4400 and ED4800 devices. 1-1/16" (27mm) diameter x 1/16" (2mm) lip x 11/16" (17mm) high. Black finish only.

Both top and bottom strikes are included in the vertical rod parts packet. To order parts packet, specify 650F57-8.



Flush Transom Top Strike Bracket

Optional for use with ED4400 devices. Used to mount top strike on openings with flush transom. 2-1/2" x 1-5/8" (64mm x 41mm). Black finish only. To order with exit device, specify M67. To order separately, specify 650F87-8.



Bottom Strike for 1/2" Thresholds

Optional for use with ED4400 and ED4800 devices. Required for 1/2" (13mm) threshold or for flush mount. 2-5/8" x 1-1/16" (67mm x 27mm). Black finish only. To order with exit device, specify S09. To order separately, specify 650F88-8.

Mullion Stabilizer Kit



Controls the movement of the mullion. Two sets supplied standard with all 808 mullions. Available in 628 and 695 finishes. To order separately, specify Part No. 653F11-1 x Finish.

Filler Plates



Optional for use on stock metal doors when required. To order, specify Part No. x Finish.

Front: 334F99-8 600



Optional for use on stock metal doors when required. To order, specify Part No. x Finish.

Strike: 236L708018 x Fin



Optional for use on stock metal doors when required. To order, specify Part No. x Finish.

Front: 077F19-8 600

ED4000 Series Narrow Stile Pushpad Exit Devices

Cylinders

Rim (Trim Only)



Description	Part Number	Cylinder Ring	Part Number 57 Function Only	Cylinder Ring**
6-pin	3000-058	270F15	3000-200N*	270F15
7-pin	3000-058-7	654F07	3000-200-7	654F07
6-pin, IC	3080-058	654F07	3080-178	654F07
7-pin, IC	3080-058-7	654F08	3080-178-7	654F08
6-pin, IC, less core	3070-058	654F07	3070-178	654F07
7-pin, IC, less core	3070-058-7	654F08	3070-178-7	654F08
6-pin, Security	3010-058	654F07	3010-200	654F07
6-pin, Security IC	3090-058	654F07	3090-178	654F07
7-pin, Pyramid	3020-058	654F07	3020-200	654F07
7-pin, Pyramid IC	3030-058	654F07	3030-178	654F07

*For K157, substitute -200
**K157 uses the 270F15 cylinder ring

Mortise (Cylinder Dogging Only)



Description	Part Number	Cylinder Ring
6-pin	1000-118-A02	N/A
7-pin	1000-114-A02-7	270F15
6-pin, IC	1080-114-A02	270F15
7-pin, IC	1080-112-A02-7	654F07
6-pin, IC, less core	1070-114-A02	270F15
7-pin, IC, less core	1070-112-A02-7	654F07
6-pin, Security	1010-118-A02	270F15
6-pin, Security IC	1090-114-A02	270F15
7-pin, Pyramid	1020-114-A02	270F15
7-pin, Pyramid IC	1030-114-A02	270F15

Ordering Examples

Exit Device Only

Quantity	Series/Function	Finish	Hand	Misc. Options
24	**ED4200S**	**626**	**RHR**	**M51-M54**

Removable Mullion

Quantity	Mullion	Finsh
12	**808**	**695**

Exit Device with Trim

Quantity	Exit Device	Trim/Function	Finish	Hand	Door Thickness	Door Width	Door Height	Misc. Options
36	**ED4400**	**N855**	**605**	**LHR**	**D200**	**W048**	**H0706**	**M51-M54**

Trim Only

Quantity	Trim/Function	Finish	Hand	Door Thickness	Cylinder Option
24	**N855**	**625**	**RHR**	**D214**	**6P**

Contract/Detailed Order – Exit Device with Trim

Quantity	Keyset	Exit Device	Trim/ Function	Finish	Hand	Door Height	Optional Strike	Door Width	Misc. Options	Cylinder Option
36	**AA1**	**ED4400**	**C855**	**626**	**LHR**	**H0800**	**S09**	**W048**	**M52-M54**	**7P**

Where to find ordering information and Quick Codes

Trims and Functions	Page 14
Removable Mullion	Page 27
Handing	Page 32
Door Thickness	Page 32
Strike	Page 32
Door Width	Page 32
Door Height	Page 32
Miscellaneous Options	Page 32
Cylinder and Keying	Page 32

Corbin Russwin®

ED4000 Series Narrow Stile Pushpad Exit Devices

Quick Codes

Cylinder and Keying

Description	Specify
Less cylinder(s)	(standard)
Conventional 6-pin	6P
Conventional 7-pin	7P
IC 6-pin	C6
IC 6-pin with temporary construction core	CT6
IC 6-pin less core	CL6
IC 7-pin	C7
IC 7-pin with temporary construction core	CT7
IC 7-pin less core	CL7
Security (N/A for new keying systems)	HS
Security IC (N/A for new keying systems)	CHS
Pyramid High Security Fixed Core (UL437) = PHS	PHS
Pyramid High Security IC (Not UL437) = PCHS	PCHS
Pyramid Security Fixed Core (Not UL437) = PS	PS
Pyramid Security IC (Not UL437) = PCS	PCS
Pyramid with temporary construction core	CTP
Pyramid IC less core	CLP
Blockout function cylinder	BO
0-bitted with 2 blank keys	(standard with cylinder)
Keyed random	KR
Construction master keyed (not available for Pyramid)	CMK
Visual key control	VKC
- No keying data stamped on key or cylinder	VKC0
- Keys only	VKC1
- Cylinders and keys **	VKC2
- Cylinders only **	VKC3
Concealed key control (CKC)	
- CKC cylinders with VKC keys	CKC2
- CKC cylinders only **	CKC3
*** (not for HS, CHS, PS, PCS, PHS or PCHS)*	
2 keys per cylinder	(standard with cylinder)
More than 2 keys	KY# (e.g., KY6)

Finish

Description	Specify
Bright Brass	605
Satin Brass	606
Bright Bronze	611
Satin Bronze	612
Dark Oxidized Satin Bronze, oil rubbed	613
Bright Chromium Plated	625
Satin Chromium Plated	626
Bright Stainless Steel	629
Satin Stainless Steel	630
Satin Aluminum, Clear Anodized (mullions only)	628
Dark Bronze Coated (mullions only)	695

Handing

Hand	Specify
Right Hand Reverse	RHR
Left Hand Reverse	LHR

Door Thickness

Door	Specify
1-3/4" (44mm)	(standard)
2" (51mm)	D200
2-1/4" (57mm)	D214

Door Width

Door	Specify
24" (610mm)	W024
36" (914mm)	(standard)
48" (1219mm)	W048

Strike

Description	Specify
Surface and concealed vertical rod Bottom strike for 1/2" thresholds	S09

Removable Mullion

Door Height	Specify
Up to 8'0" (ED4200 & ED4200S)	808

Door Height

Door	Specify
ED4400 devices	
7'0"	(standard)
7'2"	H0702
7'6"	H0706
8'0"	H0800
9'0"	H0900
10'0"	H1000
ED4800 devices	
8'0"	(standard)
8'2"	H0802
8'6"	H0806
9'0"	H0900
10'0"	H1000

Miscellaneous Options

Description	Specify
Torx® head screws	M04
Knurling outside & inside (embossed touchbar–device side)	M20
Knurling outside only (trim side)	M21
Knurling inside only (embossed touchbar–device side)	M22
Abrasive coat outside and inside (trim and device)	M23
Abrasive coat inside only (device side)	M24
Abrasive coat outside only (trim side)	M25
Less dogging	M51
Cylinder dogging	M52
Sex nuts and bolts (SNBs)	M54
Shim kit (for vision light)	M58
Flush transom top strike bracket	M67

Electrical Options

Description	Specify
Alarm Option	M61
Bolt Position Monitor	M91
Touchbar Monitor	M92
Trim Monitor	M93
Latch Pullback	M94
Electric Dogging	M97
Delayed Egress	D

ED4000 Series
(all variables)

Series	"A"	"B"
ED4000	**34-5/8" (880mm)**	**18" (457mm)**
ED4000 x W024	**22-5/8" (575mm)**	**12" (305mm)**
ED4000 x W048	**46-5/8" (1184mm)**	**24" (610mm)**

Dimensions are shown in: **inches** / **mm**

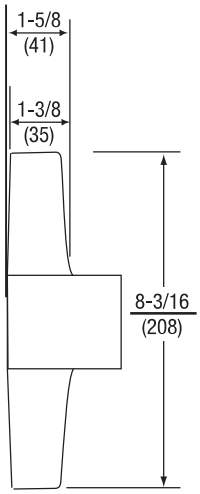

Cover Detail

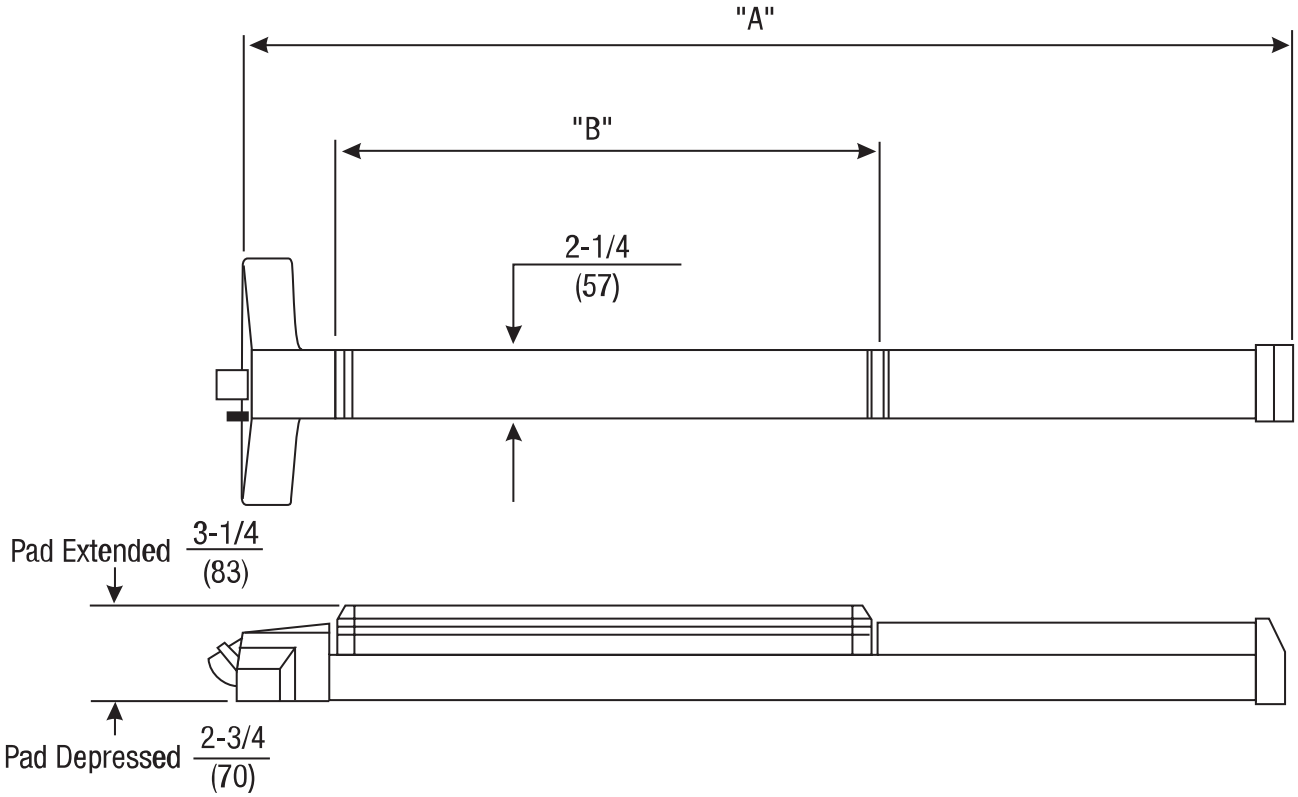

Abrasive Coat
Hard granular material applied to provide a non-slip tactile surface for the visually impaired.

Active Door
In a pair of doors, the door that is operable from the trim side.

Astragal
A vertical member applied to one or both sides of a pair of doors at the meeting edges. The astragal closes the gap between the two doors.

Coordinator
A device used on a pair of doors to ensure that the inactive door closes before the active door.

Deadlocking Latch
A supplemental latch that automatically deadlocks the latchbolt when pressure is applied to it.

Dogging
A mechanism that allows the latchbolt to remain retracted, permitting the door to operate as if it were a push-pull; it cannot be used on fire-rated exit devices.

Double Egress
A pair of doors of the same hand that swing in opposite directions, commonly found in corridors.

Dummy Trim
Trim only. Usually used on the inactive door of a pair of doors for design balance.

Exit Device (Panic Hardware)
A door locking device with a pushbar or crossbar which, when pressed, allows instant exit (egress).

Fire Exit Hardware
An exit device listed by an independent testing laboratory as meeting panic, fire and hose stream test standards; used on fire-rated openings.

Hand
The direction a door swings.

Inactive Door
In a pair of doors, the door that is inoperable from the trim side.

Latchbolt
A lock component that has a beveled end and projects into a strike, holding the door in a closed position.

Mullion
A fixed or removable vertical member that divides a door opening and provides a latch surface for a pair of rim exit devices.

Open Back Strike
For mortise exit devices, used on the inactive door (usually the vertical rod door) of a pair of doors that swing in the same direction. It permits the inactive door to open or close independently.

Reversible
Pertains to a product that may be changed in the field to accommodate any hand of the door.

Shim Kit
Pieces of metal that permit mounting of an exit device on a door that has a surface projecting vision light (glass bead) molding.

Split Astragal
An astragal that is split through the middle on a pair of doors, allowing both doors to operate independently.

Threshold
A strip fastened to the floor beneath a door. It serves as a stop, prevents heat loss, and provides a strike location for latching the bottom rod of a vertical rod exit device.

Trim
A knob, lever, pull, or thumbpiece used on the outside of an exit device door to control access to an area.

Universal Exit Device
An exit device that may be used on doors of either hand without any modifications.

Keying and Cylinder Terms

Blockout Cylinder
A cylinder which allows all keys to be temporarily blocked from operating. It is set by a blockout key.

Concealed Key Control (CKC)
The marking of standard key symbols on a cylinder in a location that is not visible once the cylinder is installed.

Construction Master Keying (CMK)
A cylinder preparation that allows temporary access by construction personnel.

Control key
A key used to remove and install interchangeable cores.

Cylinder
A lock component containing the combination that determines which keys will operate.

Security Cylinder
A cylinder which provides extra resistance to picking and unauthorized duplication of keys.

Interchangeable Core (IC)
A cylinder which can be removed and installed quickly with a control key by non-skilled personnel when rekeying is required.

Key Symbol
A letter/number combination in standard industry format (e.g., 1AA, AA1, etc.) which indicates exactly how a key or cylinder fits into a keying system.

Keyway
The opening in a cylinder plug through which the key enters.

Master Keying
Preparation of a cylinder to operate with keys of different levels of access.

Visual Key Control (VKC)
The marking of standard key symbols on keys and on the visible portion of the front of a cylinder.

Suggested Specification

Exit devices shall be ED4000 Series Narrow Stile Pushpad Exit Devices.

The exit device chassis shall be cold forged steel, electroplated for corrosion resistance, and shall be architecturally finished brass, bronze or stainless steel. The pushpad mechanism shall be constructed of extruded aluminum and shall be scalped with architecturally finished brass, bronze or stainless steel. The maximum projection shall be 3-1/4" when the pushpad is active and 2-3/4" when the pushpad is dogged down. Nylon bearings and stainless steel springs shall be used for long life and durability; only torsion springs are acceptable. Rear and active case covers shall be wrought brass or bronze and shall be plated to match the exit bar. Plastic or painted covers are not acceptable. Latchbolts shall be steel and shall incorporate a deadlocking latch feature for increased security. Devices without deadlocking latches are not acceptable. Mounting screws shall be concealed to deter tampering. Devices shall be closed on all sides with no pinch points. All exit devices shall be easily field sized to accommodate various door widths.

Exit devices shall have single point, one quarter turn hex key dogging standard. Optional cylinder dogging shall be available. Devices with hex key dogging shall be easily field converted to cylinder dogging. Panic listed devices shall be available less dogging. Trims shall be throughbolted with concealed fasteners. Escutcheon and pull type trims shall be constructed of brass or bronze. All lever trims shall use cast or forged levers. On trims with cylinders, the mechanism that locks and unlocks the trim shall be housed in the trim and not in the active case of the exit device. Lever trims shall match those on Corbin Russwin Mortise and Cylindrical Locksets.

Exit devices and trims shall be furnished in BHMA standard architectural finishes.

Exit devices shall be listed by Underwriters Laboratories (UL) for safety as panic hardware.

Certification:
ANSI/BHMA A156.3, Grade 1

Exit devices, trims and cylinders shall be from one manufacturer.

Trims and electronic components shall carry a one-year limited warranty.

Exit devices shall carry a five-year limited warranty.

For more information regarding Corbin Russwin Locksets, Exit Devices, Door Controls and Key Systems, contact your authorized Corbin Russwin Distributor or Sales Representative.

In U.S.:
Corbin Russwin Architectural Hardware
1902 Airport Road
Monroe, NC 28110
Phone 800-543-3658
Fax 800-447-6714
www.corbin-russwin.com

In Canada:
Yale-Corbin Canada Ltd.
6940 Edwards Boulevard
Mississauga, ONT L5T 2W2
Phone 800-461-3007
Fax 800-461-8989
www.yalecorbin.on.ca

The ASSA ABLOY Group is the world's leading manufacturer and supplier of locking solutions, dedicated to satisfying end-user needs for security, safety and convenience.

Corbin Russwin and Design® is a registered trademark of Corbin Russwin, Inc. Norton® and Powermatic® are registered trademarks of Yale Security Inc. SecureBolt™ is a registered trademark of Corbin Russwin, Inc. Folger Adam® is a registered trademark of Folger Adam Security Inc. Other products brand names may be trademarks or registered trademarks of their respective owners and are mentioned for reference purposes only. These materials are protected under US copyright laws. Copyright© 2001, 2004 Corbin Russwin, Inc. All contents current at time of publication. Corbin Russwin, Inc. reserves the right to change availability of any item in this catalog, its design, construction, and/or its materials.