Grade 2 Cylindrical Key-In-Knob Lock Product Catalog

S Series

FALCON
Locks & Security Products

Ingersoll Rand Security & Safety®

FALCON
Locks & Security Products

S Series

Falcon Lock Philosophy

"Quality locksets delivered on time" is the Falcon Lock creed. Whether you're ordering Falcon Locks for a retrofit application or specifying Falcon Lock for a major construction project, you're guaranteed personal attention through reliable, dependable service. No hassles. No hold-ups. Our top-quality locksets are delivered to specifically meet your schedule.

Falcon Lock is a member of the IR Security & Safety family, a world-wide division of Ingersoll-Rand Company.

INDEX

Credentials	**2**
ANSI/BHMA	**2**
Underwriters Laboratories	**2**
Federal Specifications	**2**
Americans with Disabilities Act	**2**
General Information	**3**
How to Order	**3**
Finishes	**3**
Lock Features and Specifications	**4**
Knob Designs	**5-7**
Functions	**8**
Cylinders	**9**
Interchangeable Cores	**9**
Standard Cylinders	**9**
Competitor Keyways	**10**
Options and Accessories	**11**
Latches	**11**
Strikes	**12**
Dust Box	**12**
Extension Link	**12**
Construction Keying	**13**
Conversion Chart	**14**

General

For over 30 years, Falcon Lock has been manufacturing reliable lock hardware. Our reputation and commitment to providing a high quality product at a reasonable price, with timely delivery, has been rewriting the standard in our industry. Falcon has one of the most extensive lines available on the market today- with a choice of functions and applications to meet and outreach the most demanding requirements.

Falcon locks feature the ultimate convenience and flexibility of an interchangeable core. Whenever a key is lost or stolen, locks can be re-keyed quickly by removing the core and installing a new one, avoiding locksmith services. Our interchangeable cores are also compatible with other small format interchangeable core products.

We continue to keep a pulse on our market by working closely with various agencies and organizations, such as ANSI/BHMA, who are responsible for the writing of specifications and standards. This allows us to improve and meet the needs of a changing market with reliable and flexible locks, delivered on time, exactly when you need them.

We are members of:

All information and specifications contained in this catalog are subject to change. Please consult our current price list or the factory for comprehensive and current product information.

Falcon Lock S Series locksets conform to all performance and dimensional specifications of ANSI/BHMA A156.2, Series 4000, Grade 2. Falcon Lock subscribes to the testing program under the jurisdiction of BHMA.

BHMA: Builders Hardware Manufacturers Association.

ANSI: American National Standards Institute, Inc.

Underwriters Laboratories, Inc. All Falcon Lock S Series locksets are UL Listed 3 hour A Label.

Federal Specifications: All Falcon Lock S Series locksets meet or exceed the requirements of FF-H-00106b and FF-H-106C/GEN.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

S Series

FALCON Locks & Security Products

How to Order

For correct ordering, and to ensure no delays in shipment of your order, the following descriptive data must be listed in the sequence shown. Necessary information can be found in other parts of this catalog.The example below shows an order for 20 each S latchsets in the 101 Passage function, HG (Hana-Gala) trim design in a 626 (satin chrome) finish, with 2-3/4" backset to accommodate doors 1-3/8" thick.

Quantity: Indicate the quantity required.

Catalog: Select catalog number.

Trim Design: Indicate letter of knob design followed by letter of rose design. Example: HG="H" for Hana knob followed by "G" for Gala rose.

Finish: When the finish is the same for the outside and inside trim, it is shown once (626). For split finishes, the outside is designated first, then the inside (605 x 625).

Latches: 2-3/4" backset standard. 2-3/8", 3-3/4" and 5" backset available. UL Listed standard.

Strikes: 2-3/4" high T-strike standard. Optional ANSI or full lip strikes available. See page 12.

Cylinder Type: For 6 pin, add 6 pin.

Door Hand: Locks are field reversible. Please specify on all keyed locks so that cylinders can be assembled in the upright position.

Keying Detail: We suggest using the standard terms developed by A.H.C. (Architectural Hardware Consultants).
EXAMPLE: AA1 - Grand Master keyed, Master keyed, change key 1.

Interchangeable Core: To order product capable of accepting an interchangeable core, add **"FIC"** (for interchangeable core). To order product with an interchangeable core, add **"WIC"** (with interchangeable core). Specify 6 pin or 7 pin and keyway required.

Keyways: "G" is standard on regular cylinders, **"A"** is standard on interchangeable cores. Other keyways available. See page 10.

Additional Keys: Add– "total number of keys required."

Large Bow Keys: Add– "with large bow keys."

How to order example

Qty.	Catalog Number	Trim Design	Finish	Latch	Strike	Detail
20	S101	HG	626	STD	STD	2-3/4" Backset- 1-3/8" Door

Finishes

The latest in modern techniques and equipment are used to apply the highest quality finish. Extra steps assure durable, consistent finishes and long useful life.

Although we apply the finest available protective plating and/or enamel coating to the surface of our products, these finishes have limitations and in time may deteriorate either from exposure to weather, pollution, perspiration, extremes of climate, frequency of use or other factors. Deterioration of these finishes is, therefore, not a defect, but a normal process which is unavoidable. Our company cannot accept responsibility for finish deterioration in these circumstances and therefore the finishes cannot be guaranteed. These products will not be refinished or replaced under our warranty should deterioration of finishes occur.

Trim Finishes Chart

Description	ANSI No.	Available on
Bright Brass	605	All Trim
Satin Brass	606	All Trim
Satin Bronze	612	All Trim
Satin Bronze Oil Rubbed	613	All Trim
Bright Chrome	625	All Trim
Satin Chrome	626	All Trim

Lock Features and Specifications

S Series

FALCON Locks & Security Products

Lock Features

Door Thickness: 1-3/8" to 1-7/8" doors. Locks for thicker doors to 2-1/4" also available.

Backset: 2-3/4" standard; 2-3/8", 3-3/4" and 5" also available.

Mechanism: Parts constructed of brass or cold formed steel, zinc plated and dichromated for rust resistance. Springs are stainless steel.

Attachment: Locks secured to door by threaded collars. Inner collar tightened by special wrench furnished with each lock. Outer rose contains locking plate to prevent unauthorized removal.

Handing: Specify hand of door when ordering. Field reversible.

Cylinders: Drilled with 6 pin chambers, pinned in 5. Pinning in 6 chambers available when specified, at no cost. Cylinder assemblies removable to rekey or change hand of lock. Also available with 6 or 7 pin interchangeable core cylinders—Elite and Troy designs. Cylinder housings and plugs machined from solid brass. Springs phosphor bronze. Two nickel silver keys furnished standard.

Keyways: "G" keyway standard on standard cylinders. "A" Keyway standard on interchangeable core cylinders. Also available with some optional keyways. See page 10.

Trim: Roses are heavy wrought brass or bronze, installed over wrought steel reinforcing plates. Knobs are brass or bronze secured by steel knob retainer which cannot be depressed when lock has been locked. See individual designs shown on pages 5 and 6 for details.

Latches: 1/2" projection, UL Listed. Latches have self-adjusting fronts to accommodate beveled or flat doors. 2-3/8" backset with 2-1/4" x 1" latchfaces. 2-3/4", 3-3/4" and 5" backset with 2-1/4" x 1-1/8" latchfaces. Consult Options and Accessories section for other optional faceplates.

Strikes: 2-3/4" x 1-1/8" T-strike with curved lip to meet ANSI A115.2 door frame preparation standard. Consult Options and Accessories section for other strike sizes and configurations.

Screws: Furnished with combination wood/machine screws for use in wood or metal doors and frames.

ANSI/BHMA: Meets ANSI/BHMA A156.2, Series 4000, Grade 2.

UL: 3 hour A label.

Falcon Lock S Series Specifications

Key-In-knob cylindrical locksets shall be Falcon Lock S Series or equal and meet the following requirements:

- All locksets and latchsets shall meet Grade 2 requirements of ANSI/BHMA A156.2, Series 4000.
- Locksets and latchsets shall be UL Listed for use on 3 Hour A Label doors.
- All locksets and latchsets shall have 3-1/4" diameter round roses.
- There shall be no exposed screws on trim.
- All locksets and latchsets shall have threaded collars for easy door thickness adjustment on both sides of door.
- Cylinders shall have a minimum of 6 active pin chambers and shall be furnished with 2 nickel silver keys.

Acceptable manufacturer: **FALCON LOCK COMPANY**

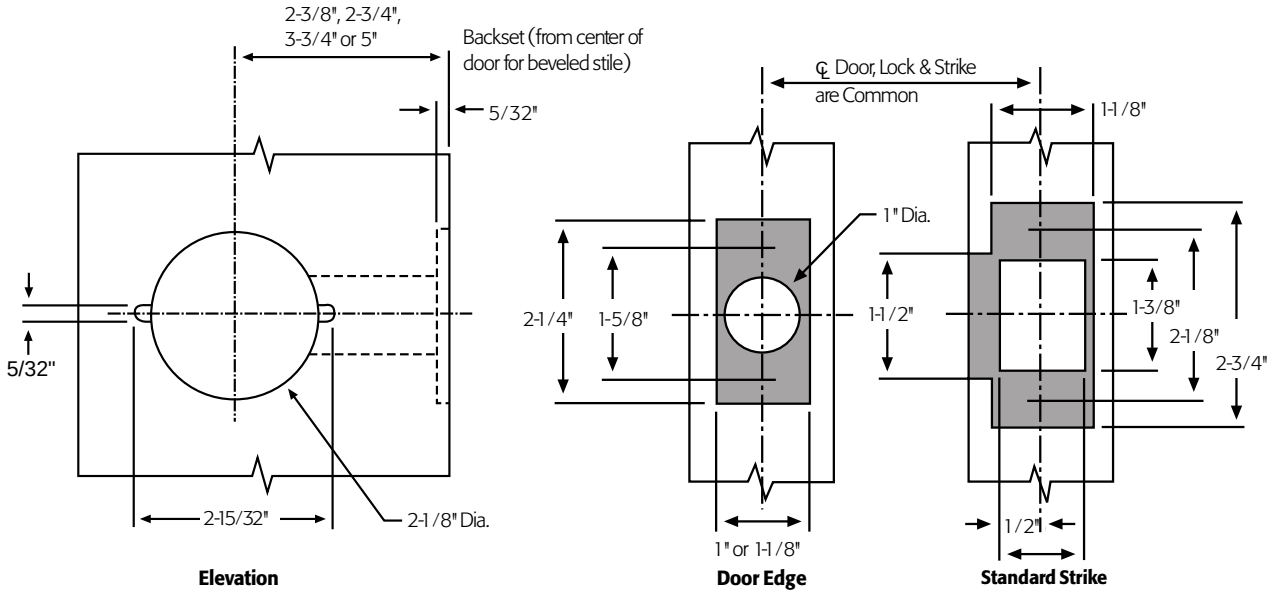

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

S Series

FALCON
Locks & Security Products

Knobs and Rose

Knobs and roses are wrought brass or bronze installed over steel reinforcing plates. Knobs are secured by a spring-loaded retainer. Retainer cannot be depressed when locks have been locked.



TG
Troy-Gala



EG
Elite-Gala

S Series



HG
Hana-Gala



HY
Hana-York

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

S Series



TY
Troy-York



EY
Elite-York

Abrasive Coated Knobs

All knobs are available with abrasive coating around the circumference of the knob to identify entrances to hazardous areas for the handicapped. To order add: "with abrasive coated outer knob" in detail section of order.

S Series

To order Falcon Lock S Series locksets, please consult page 3 for ordering information and assistance.

Indicates interchangeable core available.

Catalog Number	Function	Description	ANSI No. & Grade
S101		**Passage/Closet Latchset** Latch bolt by knobs at all times.	F75-2
S301		**Privacy Lock** Latch bolt by knobs. Outside knob locked by push button in inside knob. Rotating inside knob or closing door releases button. Emergency release in outside knob.	F76-2
S501		**Entry Lock** Push button locking. Button on inside locks outside knob until unlocked by key or by rotating inside knob.	F82-2
S511		**Entry/Office Lock** Turn/push button locking. Pushing and turning button locks outside knob requiring use of key until button is manually unlocked. Push button locking. Pushing button locks outside knob until unlocked by key or by turning inside knob. Inside knob always free.	F109-2
S521		**Office Lock** Turn button locking. Turning button locks outside knob requiring use of key until button is manually unlocked. Inside knob always free.	F81-2
S561		**Classroom Lock** Deadlocking latch bolt by knobs. Outside knob is locked by key in outside knob. Inside knob always free.	F84-2
S581		**Storeroom Lock** Deadlocking latch bolt operated by inside knob or key outside. Outside knob rigid.	F86-2
S12		**Dummy Trim** Single Trim—Surface mounted.	

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falconlock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

FALCON
Locks & Security Products

S Series

Falcon Interchangeable Cores

Catalog Number	Description
C606*	For use in all S Series I/C keyed locks — 6 pin (cover style)
C607*	For use in all S Series I/C keyed locks — 7 pin (cover style)
CB806*	For use in all S Series I/C keyed locks — 6 pin (cap style)
CB807*	For use in all S Series I/C keyed locks — 7 pin (cap style)

Note: Specify finish: 606 or 626.
Specify keyway: "A" (standard) or "other key way."



Interchangeable Core
Cover Style



Interchangeable Core
Cap Style

Falcon Standard Cylinders

Catalog Number	Description	Knob Design	Functions
A23151-01	5 Pin Assy.	E,T	561
A23151-02	5 Pin Assy.	E,T	501/511/521/581
A23151-02	5 Pin Assy.	H	561
A23151-03	5 Pin Assy.	H	501/511/521/581
A23161-01	6 Pin Assy.	E,T	561
A23161-02	6 Pin Assy.	E,T	501/511/521/581
A23161-02	6 Pin Assy.	H	561
A23161-03	6 Pin Assy.	H	501/511/521/581

Note: Specify finish: 606 or 626.
Specify keyway: "E", "G" (standard),"H", "K", "L", "N", "P".

FALCON Locks & Security Products

S Series

Standard Cylinders with Competitor Keyways–6 pin

Catalog Number	Description	Knob Design	Functions
A23170-002	Arrow 'O' Bitted	E,T	561
A23170-2KA	Arrow 'KA' Keyed Alike 4	E,T	561
A23170-2KD	Arrow 'KD' Keyed Different	E,T	561
A23167-002	Corbin 60 'O' Bitted	E,T	561
A23167-2KD	Corbin 60 'KD' Keyed Different	E,T	561
A23168-002	Russwin D1 'O' Bitted	E,T	561
A23168-2KD	Russwin D1 'KD' Keyed Different	E,T	561
A23166-002	Sargent LA 'O' Bitted	E,T	561
A23166-2KD	Sargent LA 'KD' Keyed Different	E,T	561
A23160-002	Schlage C 'O' Bitted	E,T	561
A23160-2KA	Schlage C 'KA' Keyed Alike 4	E,T	561
A23160-2KD	Schlage C 'KD' Keyed Different	E,T	561
A23159-002	Schlage E 'O' Bitted	E,T	561
A23169-002	Yale 8 (PARA) 'O' Bitted	E,T	561
A23169-2KD	Yale 8 (PARA) 'KD' Keyed Different	E,T	561
A23158-002	Yale GA 'O' Bitted	E,T	561
A23170-003	Arrow 'O' Bitted	E,T	501/511/521/581
A23170-3KA	Arrow 'KA' Keyed Alike 4	E,T	501/511/521/581
A23170-3KD	Arrow 'KD' Keyed Different	E,T	501/511/521/581
A23167-003	Corbin 60 'O' Bitted	E,T	501/511/521/581
A23167-3KD	Corbin 60 'KD' Keyed Different	E,T	501/511/521/581
A23168-003	Russwin D1 'O' Bitted	E,T	501/511/521/581
A23168-3KD	Russwin D1 'KD' Keyed Different	E,T	501/511/521/581
A23166-003	Sargent LA 'O' Bitted	E,T	501/511/521/581
A23166-3KD	Sargent LA 'KD' Keyed Different	E,T	501/511/521/581
A23160-003	Schlage C 'O' Bitted	E,T	501/511/521/581
A23160-3KA	Schlage C 'KA' Keyed Alike 4	E,T	501/511/521/581
A23160-3KD	Schlage C 'KD' Keyed Different	E,T	501/511/521/581
A23159-003	Schlage E 'O' Bitted	E,T	501/511/521/581
A23169-003	Yale 8 (PARA) 'O' Bitted	E,T	501/511/521/581
A23169-3KD	Yale 8 (PARA) 'KD' Keyed Different	E,T	501/511/521/581
A23158-003	Yale GA 'O' Bitted	E,T	501/511/521/581

Note: Specify finish: 606 or 626.

Catalog Number	Description	Knob Design	Functions
A23170-003	Arrow 'O' Bitted	H	561
A23170-3KA	Arrow 'KA' Keyed Alike 4	H	561
A23170-3KD	Arrow 'KD' Keyed Different	H	561
A23167-003	Corbin 60 'O' Bitted	H	561
A23167-3KD	Corbin 60 'KD' Keyed Different	H	561
A23168-003	Russwin D1 'O' Bitted	H	561
A23168-3KD	Russwin D1 'KD' Keyed Different	H	561
A23166-003	Sargent LA 'O' Bitted	H	561
A23166-3KD	Sargent LA 'KD' Keyed Different	H	561
A23160-003	Schlage C 'O' Bitted	H	561
A23160-3KA	Schlage C 'KA' Keyed Alike 4	H	561
A23160-3KD	Schlage C 'KD' Keyed Different	H	561
A23159-003	Schlage E 'O' Bitted	H	561
A23169-003	Yale 8 (PARA) 'O' Bitted	H	561
A23169-3KD	Yale 8 (PARA) 'KD' Keyed Different	H	561
A23158-003	Yale GA 'O' Bitted	H	561
A23170-004	Arrow 'O' Bitted	H	501/511/521/581
A23170-4KA	Arrow 'KA' Keyed Alike 4	H	501/511/521/581
A23170-4KD	Arrow 'KD' Keyed Different	H	501/511/521/581
A23167-004	Corbin 60 'O' Bitted	H	501/511/521/581
A23167-4KD	Corbin 60 'KD' Keyed Different	H	501/511/521/581
A23168-004	Russwin D1 'O' Bitted	H	501/511/521/581
A23168-4KD	Russwin D1 'KD' Keyed Different	H	501/511/521/581
A23166-004	Sargent LA 'O' Bitted	H	501/511/521/581
A23166-4KD	Sargent LA 'KD' Keyed Different	H	501/511/521/581
A23160-004	Schlage C 'O' Bitted	H	501/511/521/581
A23160-4KA	Schlage C 'KA' Keyed Alike 4	H	501/511/521/581
A23160-4KD	Schlage C 'KD' Keyed Different	H	501/511/521/581
A23159-004	Schlage E 'O' Bitted	H	501/511/521/581
A23169-004	Yale 8 (PARA) 'O' Bitted	H	501/511/521/581
A23169-4KD	Yale 8 (PARA) 'KD' Keyed Different	H	501/511/521/581
A23158-004	Yale GA 'O' Bitted	H	501/511/521/581

Note: Specify finish: 606 or 626.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

S Series

3 Hour

Latches—1/2" Projection, UL listed



Square Corner
1/2" Projection



1/4" Radius Corner
1/2" Projection

Latches for S Series locks are UL Listed. Latches have self-adjusting fronts to accommodate beveled or flat doors.

Unless otherwise specified, we furnish a 2-1/4" x 1" x square corner faceplate on 2-3/8" backset latches and 2-1/4" x 1-1/8" x square corner on 2-3/4", 3-3/4" or 5" backset latches.

Catalog Number	Description	Faceplate Size	Corner
A94420-000	2-3/8" Backset Spring	2-1/4" x 1"	Square
A94420-00D	2-3/8" Backset Deadlocking	2-1/4" x 1"	Square
A94421-000	2-3/8" Backset Spring	2-1/4" x 1"	Radius
A94421-00D	2-3/8" Backset Deadlocking	2-1/4" x 1"	Radius
A94425-000	2-3/8" Backset Spring	2-1/4" x 1-1/8"	Square
A94425-00D	2-3/8" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A94430-000	2-3/4" Backset Spring	2-1/4" x 1"	Square
A94430-00D	2-3/4" Backset Deadlocking	2-1/4" x 1"	Square
A94431-000	2-3/4" Backset Spring	2-1/4" x 1"	Radius
A94431-00D	2-3/4" Backset Deadlocking	2-1/4" x 1"	Radius
A94435-000	2-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A94435-00D	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A94440-000	3-3/4" Backset Spring	2-1/4" x 1"	Square
A94440-00D	3-3/4" Backset Deadlocking	2-1/4" x 1"	Square
A94441-000	3-3/4" Backset Spring	2-1/4" x 1"	Radius
A94441-00D	3-3/4" Backset Deadlocking	2-1/4" x 1"	Radius
A94445-000	3-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A94445-00D	3-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A94450-000	5" Backset Spring	2-1/4" x 1"	Square
A94450-00D	5" Backset Deadlocking	2-1/4" x 1"	Square
A94451-000	5" Backset Spring	2-1/4" x 1"	Radius
A94451-00D	5" Backset Deadlocking	2-1/4" x 1"	Radius
A94455-000	5" Backset Spring	2-1/4" x 1-1/8"	Square
A94455-00D	5" Backset Deadlocking	2-1/4" x 1-1/8"	Square

Note: Specify finish: 606, 612, 613, 630.

FALCON
Locks & Security Products

S Series

Strikes

Furnished with a 2-3/4" T-strike unless specified otherwise.



005065-000
Standard Corner T-Strike

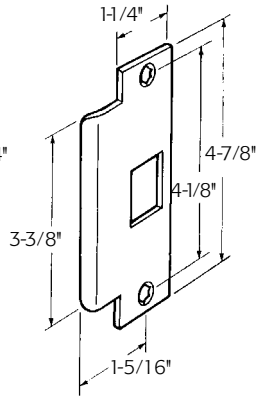

005164-000
ANSI Prep A115.2



005104-000
Full Lip, Square Corner



005104-001
Full Lip, 1/4" Radius Corner

Note: Specify Finish: 605, 606, 612, 613, 626 or 630.

Dust Boxes

005099-000-30
1" deep. May be used with any 4-7/8" high (ANSI) strike.



030115-000-70
7/16" deep. May be used with any 2-1/4" high (Full Lip) strike.



012191-003-70
1/2" deep. May be used with any 2-3/4" high (T) strike.

Long Backset Extension Link

A24241-005-00 link for 5" backset for use with 2-3/8" backset latches.



A24241-005-00

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

S Series

FALCON Locks & Security Products

Construction Keying

Falcon offers three different construction key systems depending on the size of and application within the project. Both systems permit the installation and use of regular door locks during construction, yet completely preserve the security of the keying system for the ultimate building owner. The Master, Grand Master and change keys are never with the locks during the construction phase of a building. Only the "construction" keys are sent to the job site. Where the job permits, we will utilize the "Lost Pin System" as our standard system for construction keying. Larger or more complicated jobs may require the use of our "Blockokey® System" for construction keying. Where security is of little concern, like for interior doors the "Disposable Construction Core" is recommended.

"Disposable Construction" Interchangeable Cores

This newly designed disposable construction core (1408) is an inexpensive alternative to interior keyed construction cores. This core should be used on interior door applications or where security on a site is not a concern. No keys need to be issued. The disposable core is inserted in the lever or knob and is operated by a thumb turn, which retracts the latch bolt. Please use either brass or permanent construction cores on exterior doors or secured areas.



Locks with "Lost Pin System"

Our "lost" pin construction key system consists of one construction pin and a shallow hole in the side of the plug.



Construction Key—**KB566**

When the "construction" key is used, the construction pin is always in the cylinder plug, sitting on top of the bottom pin.



Master Key—**KB578**

When the Master key is inserted, the construction pin is pushed up into the cylinder housing. As the Master key is rotated to the right, the construction pin will drop into the hole in the plug, thereby eliminating any future use of the construction key.

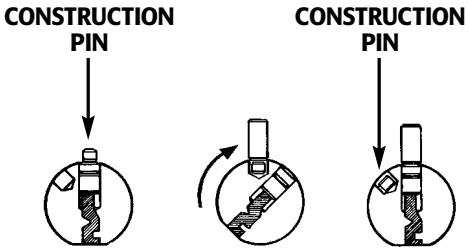

Locks with Blockokey® Cylinders

All lock cylinders on a specific project are operable by a special "project key." Duplicates of this key may be assigned by the building contractor to workmen and subcontractors as required. No regular change keys or Master keys are needed on the job. This eliminates the possibility of subsequent exposure from lost or stolen keys.

How to order locks with Blockokey® Cylinders

Blockokey® locksets are ordered by adding the word "Blockokey" after the balance of the ordering information.
EXAMPLE: 72 Each B511 D 626 1AA-72AA (Blockokey)

How with Blockokey® Cylinders are Used

1.



Project Key—**KB531**

Lock cylinder is operated by the special "project key." The last two pins in the cylinder are held inoperative by the key block.

2.



Removal Tool—**KB536**

The special "project key" is canceled out by removal of the key block. A key block removal tool is furnished with the Master keys for the locks. Simply push the removal tool into the keyway, then withdraw it to remove the block. Thereafter, the "project key" will no longer operate the lock cylinder.

3.



Change or Master Key—**KB578**

Cylinder is now only operable by the regular change key or Master key.

FALCON
Locks & Security Products

S Series

S Series Grade 2 Cylindrical Key-In-Knob Lock

ANSI No./Grade	Function	Falcon	Arrow	Best	Corbin Russwin	Marks	Sargent	Yale
F75-2	Passage	S101	M01	63KN	CK4410	N	6U15	5301
F76-2	Privacy	S301	M02	63KL	CK4430	L	6U65	5302
F82-2	Entry	S501	M13	—	—	—	6G24	5307
F109-2	Entry/Office	S511	M11	63KAB	CK4451	AB	6G05	5307
F81-2	Office	S521	M11	63KAB	—	—	6G05	5307
F84-2	Classroom	B561	M17	63KR	CK4455	S	6G37	5308
F86-2	Storeroom	B581	M12	63KD	CK4457	F	6G04	5305
	Dummy Single	S12	M08	63K1DT	CK4450	DO	6U93	355

Trim Styles	Falcon	Arrow	Best	Corbin Russwin	Marks	Sargent	Yale
	Hana/Gala	BD	4C	GWC	210/210R	OB	CA
	Troy/Gala	TA	—	—	110/110R	OS	LF
	Elite/Gala	DD	6C	BWC	—	ON	BR

All effort has been made to make this information comprehensive. Since no two products are exactly alike, this data represents those products which are similar. This information was obtained from trade services and is not guaranteed nor meant to represent any product as equal to any other product.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Falcon Fits

2650 Orbiter Street, Brea, CA 92821-6265
Phone 714-572-6008/800-266-4456
US FAX 800-777-8229/International FAX 714-572-0482
www.falconlock.com

Security & Safety®

Pub. No. FA-GN-1007
Ver. 1, Rev. 6/00
©2000 Ingersoll-Rand Company
PC14680