Grade 1 Cylindrical Key-In-Knob Lock Product Catalog

X Series

FALCON
Locks & Security Products

IR Security & Safety®

FALCON
Locks & Security Products

X Series

Falcon Lock Philosophy

"Quality locksets delivered on time" is the Falcon Lock creed. Whether you're ordering Falcon Locks for a retrofit application or specifying Falcon Lock for a major construction project, you're guaranteed personal attention through reliable, dependable service. No hassles. No hold-ups. Our top-quality locksets are delivered to specifically meet your schedule.

Falcon Lock is a member of the IR Security & Safety family, a world-wide division of Ingersoll-Rand Company.

INDEX

Credentials	**2**
ANSI/BHMA	**2**
Underwriters Laboratories	**2**
Federal Specifications	**2**
General Information	**3**
How to Order	**3**
Finishes	**3**
Lock Features & Specifications	**4**
Knob Designs	**5-7**
Functions	**8**
Cylinders	**9**
Interchangeable Core	**9**
Standard Cylinders	**9**
Competitor Keyways	**10-11**
Options and Accessories	**12-13**
Latches	**12**
Strikes	**13**
Dust Boxes	**13**
Extension Link	**13**
Construction Keying	**14**
Conversion Chart	**15**

General

For over 30 years, Falcon Lock has been manufacturing reliable lock hardware. Our reputation and commitment to providing a high quality product at a reasonable price, with timely delivery, has been rewriting the standard in our industry. Falcon has one of the most extensive lines available on the market today- with a choice of functions and applications to meet and outreach the most demanding requirements.

Falcon locks feature the ultimate convenience and flexibility of an interchangeable core. Whenever a key is lost or stolen, locks can be re-keyed quickly by removing the core and installing a new one, avoiding locksmith services. Our interchangeable cores are also compatible with other small format interchangeable core products.

We continue to keep a pulse on our market by working closely with various agencies and organizations, such as ANSI/BHMA, who are responsible for the writing of specifications and standards. This allows us to improve and meet the needs of a changing market with reliable and flexible locks, delivered on time, exactly when you need them.

We are members of:

All information and specifications contained in this catalog are subject to change. Please consult our current price list or the factory for comprehensive and current product information.

Falcon Lock X Series locksets conform to all performance and dimensional specifications of ANSI/BHMA A156.2, Series 4000, Grade 1. Falcon Lock subscribes to the testing program under the jurisdiction of BHMA.

BHMA: Builders Hardware Manufacturers Association.

ANSI: American National Standards Institute, Inc.

Underwriters Laboratories, Inc. All Falcon Lock X Series locksets are UL Listed 3 hour A Label (except X591).

Federal Specifications: All Falcon Lock X Series locksets meet or exceed the requirements of FF-H-00106b and FF-H-106C/GEN.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

X Series

FALCON Locks & Security Products

How to Order

For correct ordering, and to ensure no delays in shipment of your order, the following descriptive data must be listed in the sequence shown. Necessary information can be found in other parts of this catalog. The example below shows an order for 20 each X locksets in the 301 Privacy function, EG (Elite-Gala) trim design in a 626 (satin chrome) finish, with 2-3/4" backset latch, to accommodate doors 1-3/4" thick.

Quantity: Indicate the quantity required.

Catalog Number: Select catalog number.

Trim Design: Indicate letter of knob design followed by letter of rose design. EXAMPLE: EG="E" for Elite knob followed by "G" for Gala rose.

Finish: When the finish is the same for the outside and inside trim, it is shown once (626). For split finishes, the outside is designated first, then the inside (605 x 625).

Latches: 2-3/4" backset standard. 3-3/4" and 5" backset available. UL Listed standard.

Strikes: 4-7/8" x 1-1/4" ANSI strike standard. Optional T or Full Lip strike available. See page 13.

Cylinder Type: For 6 pin, add 6 pin. For 7 pin, add 7 pin.

Door Hand: Locks are field reversible. Please specify on all keyed locks so that cylinders can be assembled in the upright position.

Keying Detail: We suggest using the standard terms developed by A.H.C. (Architectural Hardware Consultants).
EXAMPLE: AA1–Grand Master keyed, Master keyed, change key 1.

Interchangeable Core: To order product capable of accepting an interchangeable core, add **"FIC"** (for interchangeable core). To order product with an interchangeable core, add **"WIC"** (with interchangeable core). Specify 6 pin or 7 pin and keyway required.

Keyways: "G" is standard on regular cylinders, **"A"** is standard on interchangeable cores. Other keyways available.
See pages 10-11.

Additional Keys: Add– "total number of keys required."

Large Bow Keys: Add– "with large bow keys."

How to order example

Qty.	Catalog Number	Trim Design	Finish	Latch	Strike	Cylinder	Detail
20	X301	EG	626	STD	STD	-	2-3/4" Backset—1-3/4" Door

Finishes

The latest in modern techniques and equipment are used to apply the highest quality finish. Extra steps assure durable, consistent finishes and long useful life.

Although we apply the finest available protective plating and/or enamel coating to the surface of our products, these finishes have limitations and in time may deteriorate either from exposure to weather, pollution, perspiration, extremes of climate, frequency of use or other factors. Deterioration of these finishes is, therefore, not a defect, but a normal process which is unavoidable. Our company cannot accept responsibility for finish deterioration in these circumstances and therefore the finishes cannot be guaranteed. These products will not be refinished or replaced under our warranty should deterioration of finishes occur.

Trim Finishes Chart

Description	ANSI No.	Available on
Bright Brass	605	All Trim
Satin Brass	606	All Trim
Satin Bronze	612	All Trim
Satin Bronze Oil Rubbed	613	All Trim
Bright Chrome	625	All Trim
Satin Chrome	626	All Trim
Bright Stainless Steel	629	Troy Knobs Only
Satin Stainless Steel	630	Troy Knobs Only

Lock Features and Specifications

X Series

FALCON Locks & Security Products

Lock Features

Door Thickness: 1-3/8" to 1-7/8" doors. Locks for thicker doors also available. Consult factory.

Backset: 2-3/4" standard. 3-3/4" and 5" also available.

Mechanism: Parts constructed of brass or cold formed steel, zinc plated and dichromated for rust resistance. Springs are stainless steel. X Series available with all internal parts of stainless steel or other nonferrous materials.

Attachment: Locks secured to door by threaded collars. Inner collar tightened by special wrench furnished with each lock. Outer rose contains locking plate to prevent unauthorized removal.

Handing: Specify hand of door when ordering. Field reversible.

Cylinders: Drilled with 6 pin chambers, pinned in 5. Pinning in 6 chambers available when specified, at no cost. 7 pin cylinders available in Hana design. Cylinder assemblies removable to rekey or change hand of lock. Also available with 6 or 7 pin interchangeable core cylinders—Elite and Troy designs. Cylinder housings and plugs machined from solid brass. Springs are phosphor bronze. Two nickel silver keys furnished standard. See page 9.

Keyways: "G" keyway standard on standard cylinders. "A" keyway standard on I/C core cylinders. Also available with some optional keyways. See pages 10-11.

Trim: Roses are heavy wrought brass, bronze or stainless steel, installed over wrought steel reinforcing plates. Knobs are brass, bronze or stainless steel secured by a steel knob retainer which cannot be depressed when lock has been locked. See individual designs on pages 5-7 for details.

Latches: 1/2" bolt projection, UL Listed. Standard latch faceplates 2-1/4" x 1-1/8" with square corners to accommodate beveled or flat front doors. 3/4" projection, UL Listed latch with 2-3/4" backset also available.

Strikes: 4-7/8" x 1-1/4" ANSI strike with curved lip to meet ANSI A115.2 standard door frame preparation standard. Consult Options and Accessories section for other strike sizes and configurations.

Screws: Furnished with combination wood/machine screws for use in wood or metal doors and frames.

ANSI/BHMA: Meets ANSI/BHMA A156.2, Series 4000, Grade 1.

UL: 3 hour A label (except function X591).

Falcon Lock X Series Specifications

Key-in-knob cylindrical locksets shall be Falcon Lock X Series or equal and meet the following requirements:

- All locksets and latchsets shall meet Grade 1 requirements of ANSI/BHMA 156.2, Series 4000.
- Locksets and latchsets shall be UL Listed for use on 3 hour A Label doors.
- Locksets and latchsets shall have 3-1/4" diameter round roses.
- Knobs shall be .050" minimum thickness.
- There shall be no exposed screws on trim.
- Locksets and latchsets shall have threaded collars for easy door thickness adjustment on both sides of lock.
- Cylinders shall have a minimum of 6 active pin chambers and shall be furnished with 2 nickel silver keys.
- Locksets shall have 6 pin (or 7 pin) interchangeable cores.

Acceptable manufacturer: **FALCON LOCK COMPANY**

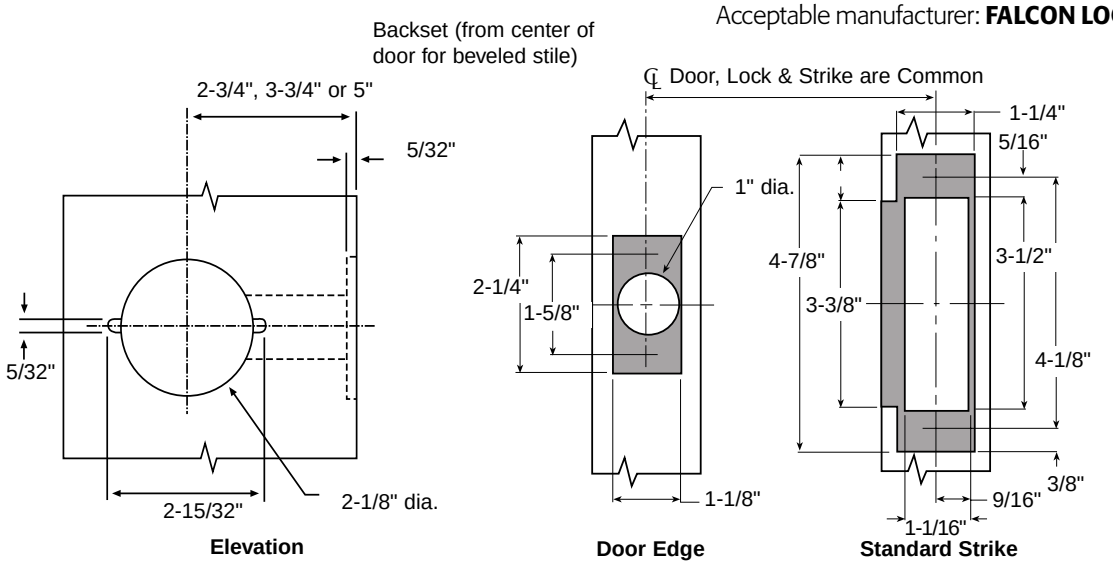

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

X Series

FALCON
Locks & Security Products

Knobs and Roses

Knobs and roses are wrought brass, bronze or stainless steel (Troy) installed over steel reinforcing plates. Knobs are secured by a spring-loaded retainer. Retainer cannot be depressed when locks have been locked.

TG
Troy-Gala

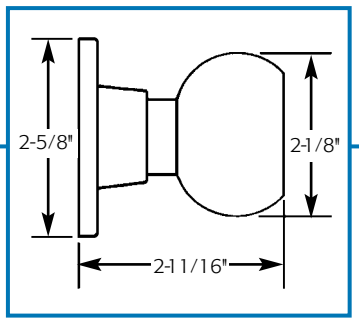

EG
Elite-Gala

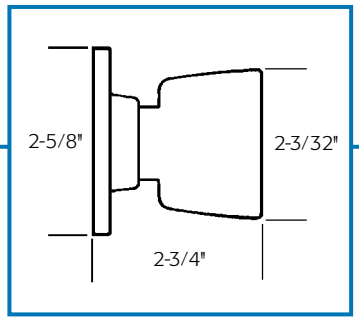

X Series

FALCON
Locks & Security Products

HG
Hana-Gala

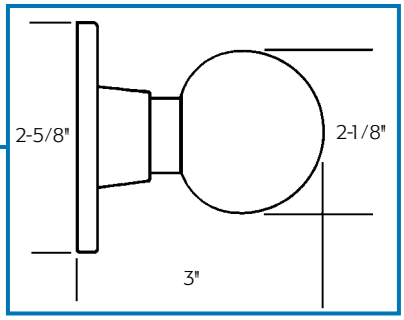

HY
Hana-York

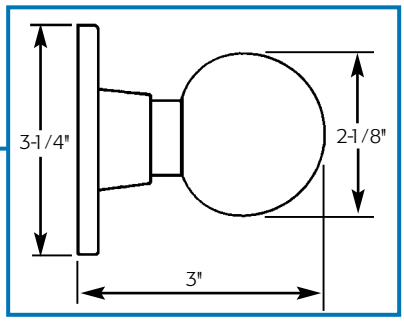

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

X Series

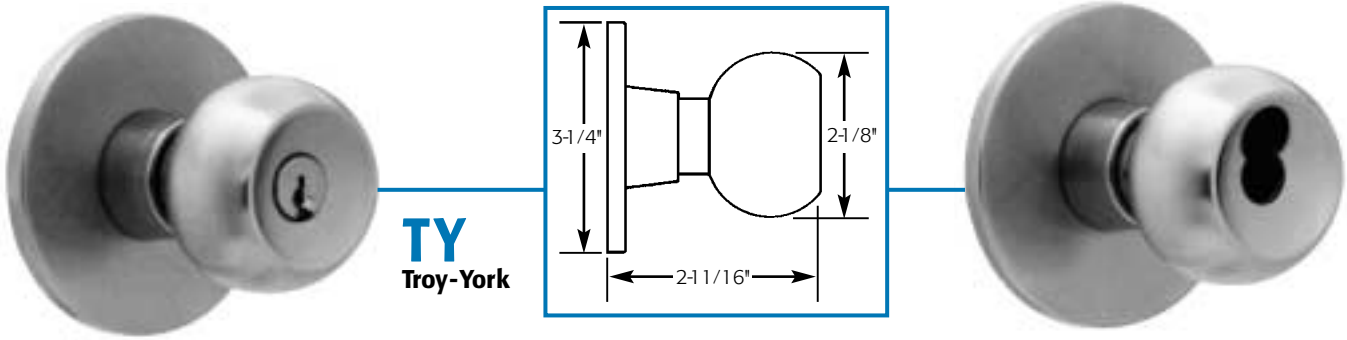

TY
Troy-York

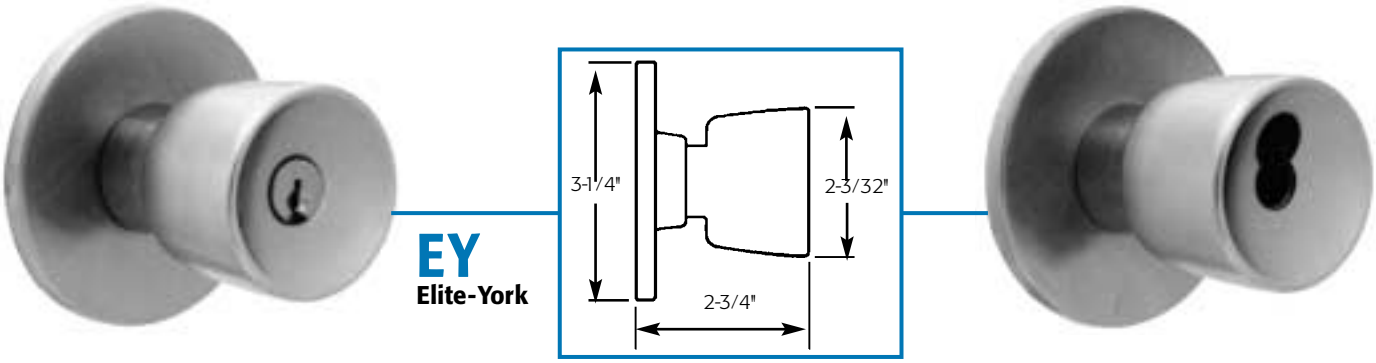

EY
Elite-York

Abrasive Coated Knobs

All trim is available with abrasive coating around the circumference of the knob to identify entrances to hazardous areas for the handicapped. To order, add: "with abrasive coated outer knob" in detail section of order.

Knurled Knobs

All heavy duty knobs are available knurled to identify entrances to hazardous areas for the handicapped. To order add: "with knurled knob" (outer or inner) in detail section of order.

X Series

FALCON Locks & Security Products

To order Falcon Lock locksets, please consult page 3 for ordering information and assistance. Indicates interchangeable core available.

Catalog Number	Function	Description	ANSI No. & Grade
X101		**Passage/Closet Latchset** Latch bolt by knobs at all times.	F75-1
X211		**Communicating Lock** Deadlocking latch bolt by knobs. Either knob is locked by turn button in opposite knob.	F78-1
X301		**Privacy Lock** Latch bolt by knobs. Outside knob locked by push button in inside knob. Rotating inside knob or closing door releases push button. Emergency release in outside knob. Emergency Release Tool 001423-001-30.	F76-1
X311		**Closet Lock** Deadlocking latch bolt by turn knob inside or knob outside except when outside knob is locked by key.	
X411		**Asylum Lock** Deadlocking latch bolt by key from either side. Both knobs rigid.	F87-1
X501		**Entry Lock** Push button locking. Button on inside locks outside knob until unlocked by key or by rotating inside knob.	F82-1
X511		**Entry/Office Lock** Turn/push button locking. Pushing and turning button locks outside knob requiring use of key until button is manually unlocked. Push button locking. Pushing button locks outside knob until 1 unlocked by key or by turning inside knob.	F109-1
X521		**Office Lock** Turn button locking. Turning button locks outside knob requiring use of key until button is manually unlocked. Inside knob always free.	F81-1
X561		**Classroom Lock** Deadlocking latch bolt by knobs. Outside knob is locked by key in outside knob. Inside knob is always free.	F84-1
X571		**Dormitory Lock** Deadlocking latch bolt by knobs except when locked by push button in inside knob. Key in outside knob locks or unlocks outside knob and releases button. Closing door releases push button. Inside knob always free.	F90-1
X581		**Storeroom Lock** Deadlocking latch bolt by inside knob or key outside. Outside knob rigid.	F86-1
X591		**Classroom Lock with Hold Back Feature** Deadlocking latch bolt by knobs. Outside knob is locked by key in outside knob. Inside knob is always free. Latch may be held back by depressing latch and rotating key.	F85-1
X12		**Dummy Trim** Single Trim–Surface mounted.	

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

X Series

Falcon Interchangeable Cores

Catalog Number	Description
C606	For use in all X Series I/C keyed locks-6 pin (cover style)
C607	For use in all X Series I/C keyed locks-7 pin (cover style)
CB806	For use in all X Series I/C keyed locks-6 pin (cap style)
CB807	For use in all X Series I/C keyed locks-7 pin (cap style)

Note: Specify finish: 606 or 626.
Specify keyway: "A" (standard) or another.



Interchangeable Core
Cover Style



Interchangeable Core
Cap Style

Falcon Standard Cylinders

Catalog Number				
5 Pin Cylinder	6 Pin Cylinder	7 Pin Cylinder	Knob Design	Function
A23151-00	A23161-00	N/A	E, T	311/561/591
A23152-00	A23162-00	N/A	E,T	411/501/511/521/581
A23151-02	A23161-02	N/A	E,T	571
A23151-01	A23161-01	A23171-01	H	311/591
A23151-02	A23161-02	A23171-01	H	561
A23152-02	A23162-02	A23172-02	H	411/501/511/521/581
A23151-03	A23161-03	A23171-02	H	571

Note: Specify finish: 606 or 626.
Specify keyway: "E", "G" (standard), "H", "K", "L", "N" or "P".

FALCON
Locks & Security Products

X Series

Standard Cylinders With Competitor Keyways—6 Pin Functions: 311 and 561

Catalog No.	Description	Knob Design
A23170-001	Arrow 'O' Bitted	E,T
A23170-1KA	Arrow 'KA' Keyed Alike 4	E,T
A23170-1KD	Arrow 'KD' Keyed Different	E,T
A23174-001	Corbin/Russwin L4 'O' Bitted	E,T
A23167-001	Corbin 60 'O' Bitted	E,T
A23167-1KD	Corbin 60 'KD' Keyed Different	E,T
A23168-001	Russwin D1 'O' Bitted	E,T
A23168-1KD	Russwin D1 'KD' Keyed Different	E,T
A23166-001	Sargent LA 'O' Bitted	E,T
A23166-1KD	Sargent LA 'KD' Keyed Different	E,T
A23160-001	Schlage C 'O' Bitted	E,T
A23160-1KA	Schlage C 'KA' Keyed Alike 4	E,T
A23160-1KD	Schlage C 'KD' Keyed Different	E,T
A23159-001	Schlage E 'O' Bitted	E,T
A23169-001	Yale 8 (PARA) 'O' Bitted	E,T
A23169-1KD	Yale 8 (PARA) 'KD' Keyed Different	E,T
A23158-001	Yale GA 'O' Bitted	E,T
A23170-002	Arrow 'O' Bitted	H
A23170-2KA	Arrow 'KA' Keyed Alike 4	H
A23170-2KD	Arrow 'KD' Keyed Different	H
A23174-002	Corbin/Russwin L4 'O' Bitted	H
A23167-002	Corbin 60 'O' Bitted	H
A23167-2KD	Corbin 60 'KD' Keyed Different	H
A23168-002	Russwin D1 'O' Bitted	H
A23168-2KD	Russwin D1 'KD' Keyed Different	H
A23166-002	Sargent LA 'O' Bitted	H
A23166-2KD	Sargent LA 'KD' Keyed Different	H
A23160-002	Schlage C 'O' Bitted	H
A23160-2KA	Schlage C 'KA' Keyed Alike 4	H
A23160-2KD	Schlage C 'KD' Keyed Different	H
A23159-002	Schlage E 'O' Bitted	H
A23169-002	Yale 8 (PARA) 'O' Bitted	H
A23169-2KD	Yale 8 (PARA) 'KD' Keyed Different	H
A23158-002	Yale GA 'O' Bitted	H

Note: Specify finish: 606 or 626.

Standard Cylinders With Competitor Keyways—6 Pin Functions: 411, 501, 511, 521 and 581

Catalog No.	Description	Knob Design
A23170-005	Arrow 'O' Bitted	E,T
A23170-5KA	Arrow 'KA' Keyed Alike 4	E,T
A23170-5KD	Arrow 'KD' Keyed Different	E,T
A23174-005	Corbin/Russwin L4 'O' Bitted	E,T
A23167-005	Corbin 60 'O' Bitted	E,T
A23167-5KD	Corbin 60 'KD' Keyed Different	E,T
A23168-005	Russwin D1 'O' Bitted	E,T
A23168-5KD	Russwin D1 'KD' Keyed Different	E,T
A23166-005	Sargent LA 'O' Bitted	E,T
A23166-5KD	Sargent LA 'KD' Keyed Different	E,T
A23160-005	Schlage C 'O' Bitted	E,T
A23160-5KA	Schlage C 'KA' Keyed Alike 4	E,T
A23160-5KD	Schlage C 'KD' Keyed Different	E,T
A23159-005	Schlage E 'O' Bitted	E,T
A23169-005	Yale 8 (PARA) 'O' Bitted	E,T
A23169-5KD	Yale 8 (PARA) 'KD' Keyed Different	E,T
A23158-005	Yale GA 'O' Bitted	E,T
A23170-006	Arrow 'O' Bitted	H
A23170-6KA	Arrow 'KA' Keyed Alike 4	H
A23170-6KD	Arrow 'KD' Keyed Different	H
A23174-006	Corbin/Russwin L4 'O' Bitted	H
A23167-006	Corbin 60 'O' Bitted	H
A23167-6KD	Corbin 60 'KD' Keyed Different	H
A23168-006	Russwin D1 'O' Bitted	H
A23168-6KD	Russwin D1 'KD' Keyed Different	H
A23166-006	Sargent LA 'O' Bitted	H
A23166-6KD	Sargent LA 'KD' Keyed Different	H
A23160-006	Schlage C 'O' Bitted	H
A23160-6KA	Schlage C 'KA' Keyed Alike 4	H
A23160-6KD	Schlage C 'KD' Keyed Different	H
A23159-006	Schlage E 'O' Bitted	H
A23169-006	Yale 8 (PARA) 'O' Bitted	H
A23169-6KD	Yale 8 (PARA) 'KD' Keyed Different	H
A23158-006	Yale GA 'O' Bitted	H

Note: Specify finish: 606 or 626.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON Locks & Security Products

X Series

Standard Cylinders With Competitor Keyways—6 Pin Functions: 571

Catalog No.	Description	Knob Design
A23170-003	Arrow 'O' Bitted	E,T
A23170-3KA	Arrow 'KA' Keyed Alike 4	E,T
A23170-3KD	Arrow 'KD' Keyed Different	E,T
A23174-003	Corbin/Russwin L4 'O' Bitted	E,T
A23167-003	Corbin 60 'O' Bitted	E,T
A23167-3KD	Corbin 60 'KD' Keyed Different	E,T
A23168-003	Russwin D1 'O' Bitted	E,T
A23168-3KD	Russwin D1 'KD' Keyed Different	E,T
A23166-003	Sargent LA 'O' Bitted	E,T
A23166-3KD	Sargent LA 'KD' Keyed Different	E,T
A23160-003	Schlage C 'O' Bitted	E,T
A23160-3KA	Schlage C 'KA' Keyed Alike 4	E,T
A23160-3KD	Schlage C 'KD' Keyed Different	E,T
A23159-003	Schlage E 'O' Bitted	E,T
A23169-003	Yale 8 (PARA) 'O' Bitted	E,T
A23169-3KD	Yale 8 (PARA) 'KD' Keyed Different	E,T
A23158-003	Yale GA 'O' Bitted	E,T
A23170-004	Arrow 'O' Bitted	H
A23170-4KA	Arrow 'KA' Keyed Alike 4	H
A23170-4KD	Arrow 'KD' Keyed Different	H
A23174-004	Corbin/Russwin L4 'O' Bitted	H
A23167-004	Corbin 60 'O' Bitted	H
A23167-4KD	Corbin 60 'KD' Keyed Different	H
A23168-004	Russwin D1 'O' Bitted	H
A23168-4KD	Russwin D1 'KD' Keyed Different	H
A23166-004	Sargent LA 'O' Bitted	H
A23166-4KD	Sargent LA 'KD' Keyed Different	H
A23160-004	Schlage C 'O' Bitted	H
A23160-4KA	Schlage C 'KA' Keyed Alike 4	H
A23160-4KD	Schlage C 'KD' Keyed Different	H
A23159-004	Schlage E 'O' Bitted	H
A23169-004	Yale 8 (PARA) 'O' Bitted	H
A23169-4KD	Yale 8 (PARA) 'KD' Keyed Different	H
A23158-004	Yale GA 'O' Bitted	H

Note: Specify finish: 606 or 626.

FALCON
Locks & Security Products

X Series

Latches — 1/2" Projection, UL listed

3 Hour



Square Corner
1/2" Projection



1/2" Radius Corner
9/16" Projection

Latches for X Series locks are UL listed.

2-3/4" backset standard.

3-3/4" and 5" optional.

Self-adjusting fronts.

Unless otherwise specified, we furnish a 2-1/4" x 1-1/8" square corner faceplate on 2-3/4", 3-3/4" or 5" backset latches.

Catalog Number	Description	Faceplate Size	Corner
A98535-000	2-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A98535-00D	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A98538-000	2-3/4" Backset Spring	2-1/4" x 1-1/8"	Radius
A98538-00D	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Radius
A98545-000	3-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A98545-00D	3-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A98548-000	3-3/4" Backset Spring	2-1/4" x 1-1/8"	Radius
A98548-00D	3-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Radius
A98555-000	5" Backset Spring	2-1/4" x 1-1/8"	Square
A98555-00D	5" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A98558-000	5" Backset Spring	2-1/4" x 1-1/8"	Radius
A98558-00D	5" Backset Deadlocking	2-1/4" x 1-1/8"	Radius

Note: Specify finish: 606, 612, 613, 630.

Latches — 3/4" Projection, UL listed

3 Hour



Square Corner
3/4" Projection



9/16" Radius Corner
3/4" Projection

Latches for X Series locks are UL listed.

2-3/4" backset standard.

3-3/4" and 5" optional.

Self-adjusting fronts.

Unless otherwise specified, we furnish a 2-1/4" x 1-1/8" square corner faceplate on 2-3/4", 3-3/4" or 5" backset latches.

Catalog Number	Description	Faceplate Size	Corner
A98835-0SD	2-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A98838-0SD	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Radius

Note: Specify finish: 606, 612, 613, 630.

Latches — 1/2" Projection, UL listed

3 Hour



Square Corner
1/2" Projection



1/4" Radius Corner
1/2" Projection

These grade 2 latches have self-adjusting fronts to accommodate beveled or flat doors.

Unless otherwise specified, we furnish a 2-1/4" x 1" square corner faceplate on 2-3/4", 3-3/4" or 5" backset latches.

Catalog Number	Description	Faceplate Size	Corner
A92320-000	2-3/8" Backset Spring	2-1/4" x 1"	Square
A92320-00D	2-3/8" Backset Deadlocking	2-1/4" x 1"	Square
A92321-000	2-3/8" Backset Spring	2-1/4" x 1"	Radius
A92321-00D	2-3/8" Backset Deadlocking	2-1/4" x 1"	Radius
A92330-000	2-3/4" Backset Spring	2-1/4" x 1"	Square
A92330-00D	2-3/4" Backset Deadlocking	2-1/4" x 1"	Square
A92331-000	2-3/4" Backset Spring	2-1/4" x 1"	Radius
A92331-00D	2-3/4" Backset Deadlocking	2-1/4" x 1"	Radius

Note: Specify finish: 606, 612, 613, 630.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

X Series

Strikes

Furnished with a 4-7/8" ANSI strike unless specified otherwise.



005164-000
ANSI Prep A115.2



A05185-000
Square Corner T-strike



A05185-004
9/16" Radius



005104-000
Full Lip, Square Corner



005104-001
Full Lip, 1/4" Radius Corner

Note: Specify finish: 605, 606, 612, 613, 626 or 630.

Dust Boxes

005099-000-30
1" deep. May be used with any 4-7/8" high (ANSI) strike.



012191-003-70
1/2" deep. May be used with any 2-3/4" (T) high strike.



030115-000-70
7/16" deep. May be used with any 2-1/4" (Full Lip) high strike.

Long Backset Extension Link

A22161-005-00 link for 5" backset
For use with 2-3/4" backset latches.



A22161-005-00

FALCON
Locks & Security Products

X Series

Construction Keying

Falcon offers three different construction key systems depending on the size of and application within the project. Both systems permit the installation and use of regular door locks during construction, yet completely preserve the security of the keying system for the ultimate building owner. The Master, Grand Master and change keys are never with the locks during the construction phase of a building. Only the "construction" keys are sent to the job site. Where the job permits, we will utilize the "Lost Pin System" as our standard system for construction keying. Larger or more complicated jobs may require the use of our "Blockokey® System" for construction keying. Where security is of little concern, like for interior doors the "Disposable Construction Core" is recommended.

"Disposable Construction" Interchangeable Cores

This newly designed disposable construction core (1408) is an inexpensive alternative to interior keyed construction cores. This core should be used on interior door applications or where security on a site is not a concern. No keys need to be issued. The disposable core is inserted in the lever or knob and is operated by a thumb turn, which retracts the latch bolt. Please use either brass or permanent construction cores on exterior doors or secured areas.

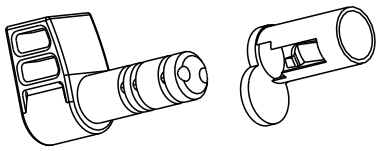

Locks with "Lost Pin System"

Our "lost" pin construction key system consists of one construction pin and a shallow hole in the side of the plug.



Construction Key—**KB566**

When the "construction" key is used, the construction pin is always in the cylinder plug, sitting on top of the bottom pin.



Master Key—**KB578**

When the Master key is inserted, the construction pin is pushed up into the cylinder housing. As the Master key is rotated to the right, the construction pin will drop into the hole in the plug, thereby eliminating any future use of the construction key.

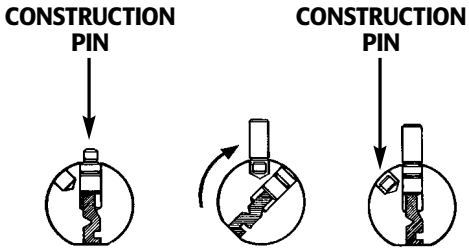

Locks with Blockokey® Cylinders

All lock cylinders on a specific project are operable by a special "project key." Duplicates of this key may be assigned by the building contractor to workmen and subcontractors as required. No regular change keys or Master keys are needed on the job. This eliminates the possibility of subsequent exposure from lost or stolen keys.

How to order locks with Blockokey® Cylinders

Blockokey® locksets are ordered by adding the word "Blockokey" after the balance of the ordering information.
EXAMPLE: 72 Each B511 D 626 1AA-72AA (Blockokey)

How with Blockokey® Cylinders are Used

1.



Project Key—**KB531**

Lock cylinder is operated by the special "project key." The last two pins in the cylinder are held inoperative by the key block.

2.



Removal Tool—**KB536**

The special "project key" is canceled out by removal of the key block. A key block removal tool is furnished with the Master keys for the locks. Simply push the removal tool into the keyway, then withdraw it to remove the block. Thereafter, the "project key" will no longer operate the lock cylinder.

3.



Change or Master Key—**KB578**

Cylinder is now only operable by the regular change key or Master key.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

X Series

X Series Grade 1 Cylindrical Key-In-Knob Lock

ANSI No./Grade	Function	Falcon	Arrow	Best	Corbin/ Russwin	Marks	Sargent	Yale
F75-1	Passage	X101	H01	83KN	CK4210	N	8U15	5401
F78-1	Communicating	X211	H05	83KM	—	—	—	—
F76-1	Privacy	X301	H02	83KL	CK4220	L	8U65	5402
	Closet	X311	—	83RZ	—	—	8G38	—
F87-1	Asylum	X411	H33	83KW	CK4232	DW	8G17	5430
F82-1	Entry	X501	H13	83KAB	CK4261	—	8G24	5407
F109-1	Entry/Office	X511	H11	83KAB	CK4251	AB	8G24	5407
F81-1	Office	X521	H11	83KAB	CK4251	—	8G05	5407
F84-1	Classroom	X561	H17	83KR	CK 4255	S	8G37	5408
F90-1	Dormitory	X571	H19	83KT	CK4275	T	8G54	5422
F86-1	Storeroom	X581	H12	83KD	CK4257	F	8G04	5405
F85-1	Classroom with Hold Back	X591	—	—	—	—	8G87	5424
	Dummy–Single	X12	H08	83K1DT	CK4250	DO	8U93	455

Trim Styles	Falcon	Arrow	Best	Corbin/ Russwin	Marks	Sargent	Yale
	Hana/Gala (HG)	BD	4C	GRC	280/280R	OB	CA
	Troy/Gala (TG)	TA	—	—	180/180R	EC	LF
	Elite/Gala (EG)	DD	6C	BRC	—	EG	BR

All effort has been made to make this information comprehensive. Since no two products are exactly alike, this data represents those products which are similar. This information was obtained from trade services and is not guaranteed nor meant to represent any product as equal to any other product.

FALCON
Locks & Security Products

Falcon Fits

2650 Orbiter Street, Brea, CA 92821-6265
Phone 714-572-6008/800-266-4456
US FAX 800-777-8229/International FAX 714-572-0482
www.falconlock.com

Security & Safety®

Pub. No. FA-GN-1013
Ver. 1, Rev. 6/00
©2000 Ingersoll-Rand Company
PC14681