Deadlocks & Deadbolts

Auxiliary Locks

FALCON
Locks & Security Products

IR Security & Safety®

FALCON
Locks & Security Products

Auxiliary Locks

Falcon Lock Philosophy

"Quality locksets delivered on time" is the Falcon Lock creed. Whether you're ordering Falcon Locks for a retrofit application or specifying Falcon Lock for a major construction project, you're guaranteed personal attention through reliable, dependable service. No hassles. No hold-ups. Our top-quality locksets are delivered to specifically meet your schedule and your budget. Falcon Lock is a member of the IR Security & Safety family, a world-wide division of Ingersoll-Rand Company.

INDEX

Credentials	**2**
ANSI/BHMA	**2**
Federal Specifications	**2**
Underwriters Laboratories, Inc.	**2**
Americans With Disabilities Act	**2**
General Information	**2**
How to Order	**3**
Finishes	**3**
Lock Features	**4-10**
D400 Series	**4-5**
D800 Series	**6-8**
H Series	**9**
K900 Series	**10-11**
Padlocks and Sliding Door Locks	**11**
Functions	**9,11**
H Series	**9**
K900	**11**
Latches	**12**
Strikes	**12**
Options and Accessories	**13**
Mounting Screws	**14**
Conversion Chart	**15**

General

For over 30 years, Falcon Lock has been manufacturing reliable lock hardware. Our reputation and commitment to providing a high quality product at a reasonable price, with timely delivery, has been rewriting the standard in our industry. Falcon has one of the most extensive lines available on the market today- with a choice of functions and applications to meet and outreach the most demanding requirements.

Falcon locks feature the ultimate convenience and flexibility of an interchangeable core. Whenever a key is lost or stolen, locks can be re-keyed quickly by removing the core and installing a new one—avoiding locksmith services. Our interchangeable cores are also compatible with other small format interchangeable core products.

We continue to keep a pulse on our market by working closely with various agencies and organizations, such as ANSI/BHMA, who are responsible for the writing of specifications and standards. This allows us to improve and meet the needs of a changing market with reliable and flexible locks, delivered on time, exactly when you need them.

We are members of:

All information and specifications contained in this catalog are subject to change. Please consult our current price list or the factory for comprehensive and current product information.

Falcon D and K Series locksets and cylinders conform to all performance and dimensional specifications of ANSI/BHMA A156.5, Grades 1, 2, or 3 depending on product selected. Falcon subscribes to the testing program under the jurisdiction of BHMA.

ANSI: American National Standards Institute, Inc.

BHMA: Builders Hardware Manufacturers Association.

Underwriters Laboratories, Inc.: Deadbolts are available UL listed.

ADA: Americans with Disabilities Act of 1991. Some locksets with lever style trim comply with handicap codes and ADA requirements.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

FALCON Locks & Security Products

Auxiliary Locks

How to Order

For correct ordering, and to ensure no delays in shipment of your order, the following descriptive data must be listed in the sequence shown. Necessary information can be found in other parts of this catalog. The example below shows an order for 20 each D locksets in the 441 Entry function, in a 626 (satin chrome) finish, to accommodate doors 1-3/4" thick with AA1-AA20 keying.

Quantity: Indicate the quantity required.

Catalog Number: Select catalog number.

Finish: When the finish is the same for the outside and inside trim, it is shown once (626). For split finishes, the outside is designated first, then the inside (626 x 625).

Latch: 2-3/4" backset standard. 2-3/8" backset available.

Strike: 2-3/4" x 1-1/8" lipless standard. Optional ANSI, T-strike, or full lip strikes available.

Cylinder Type: For 6 pin, add 6 pin. For 7 pin, add 7 pin.

Door Hand: Not required (except K911). All other locks are fully reversible.

Keying Detail: We suggest using the standard terms developed by the A.H.C. (Architectural Hardware Consultants).
EXAMPLE: AA1 - Grand Master keyed, Master keyed, change key 1.

Interchangeable Core: To order product capable of accepting an interchangeable core, add **"FIC"** (for interchangeable core). To order product with an interchangeable core, add **"WIC"** (with interchangeable core).

Keyway: "G" is standard on regular cylinders, **"A"** is standard on interchangeable cores. Other keyways available. Please consult factory.

Additional Keys: Add - "total number of keys required."

Large Bow Keys: Add - "with large bow keys."

How to order example

Qty.	Catalog Number	Trim Design	Finish	Latch	Strike	Cylinder	Detail
20	D441	—	626	STD	STD	6 PIN	AA1-AA20 1-3/4" DR

Trim Finishes

The latest in modern techniques and equipment are used to apply the highest quality finish. Extra steps assure durable, consistent finishes and long useful life.

Although we apply the finest available protective plating and/or enamel coating to the surface of our products, these finishes have limitations and in time may deteriorate either from exposure to weather, pollution, perspiration, extremes of climate, frequency of use or other factors. Deterioration of these finishes is, therefore, not a defect, but a normal process which is unavoidable.

Our company cannot accept responsibility for finish deterioration in these circumstances and therefore the finishes cannot be guaranteed. These products will not be refinished or replaced under our warranty should deterioration of finishes occur.

Trim Finishes Chart

Description	ANSI No.	Available on
Bright Brass	605	All Trim
Satin Brass	606	*
Satin Bronze	612	*
Satin Bronze Oil Rubbed	613	*
Bright Chrome	625	*
Satin Chrome	626	All Trim

* Consult Price list for finish availability by product.

FALCON
Locks & Security Products

Auxiliary Locks

D400 High Security Deadlocks 1" Bolt Projection

Door Thickness: 1-1/2" to 1-3/4". Other thicknesses available, consult factory.

Backsets: 2-3/4" standard. 2-3/8" also available.

Attachment: Locks are solidly attached to the door by 1/4" heat-treated steel bolts. These bolts pass through a steel plate (D411, D421 and D441) or the inner cylinder housing (D431) and thread directly into the back of the outer cylinder housing. A permanent type cap is inserted over each bolt (D431) thus making the bolts nearly impossible to remove.

Handing: Non-handed. May be used on right hand or left hand doors swinging in or out.

Cylinders: Furnished with solid brass plug and housing, drilled with 6 pin chambers, pinned in 5 unless otherwise specified. Also available with 7 pin cylinders. Available with 6 or 7 pin interchangeable cores. Furnished with two (2) nickel silver keys standard.

Keyways: "G" keyway standard on standard cylinders. "A" keyway standard on I/C core cylinders. Also available with some optional keyways.

Trim: Solid, bar stock brass housing. The housing is guarded by a tapered, free-turning, solid brass ring.
Note: Security collar diameter is 2". Not available with larger diameter collar. Auxiliary trim ring No. 1676 is available in matching finishes for 2-1/8" cutout.

Latches: Deadlocks are furnished with latches which have a full 1" projection dead bolt. Housed within the dead bolt is a free-turning, 1/4" thick, hardened steel, saw resistant roller. Furnished standard with 2-3/4" backset. 2-3/4" backset has a 1-1/8" x 2-1/4" faceplate. Optional 2-3/8" backset has a 1" x 2-1/4" faceplate. Consult Options and Accessories section for other optional faceplates.

Strikes: 2-3/4" x 1-1/8" lipless strike standard. ANSI 4-7/8" x 1-1/4" lipless, 2-1/4" full lip strikes, a 2-3/4" x 1-1/8" T-strike or a security strike are available. Consult Options and Accessories section.

Screws: Furnished with wood/machine screws for use on wood or metal doors or frames.

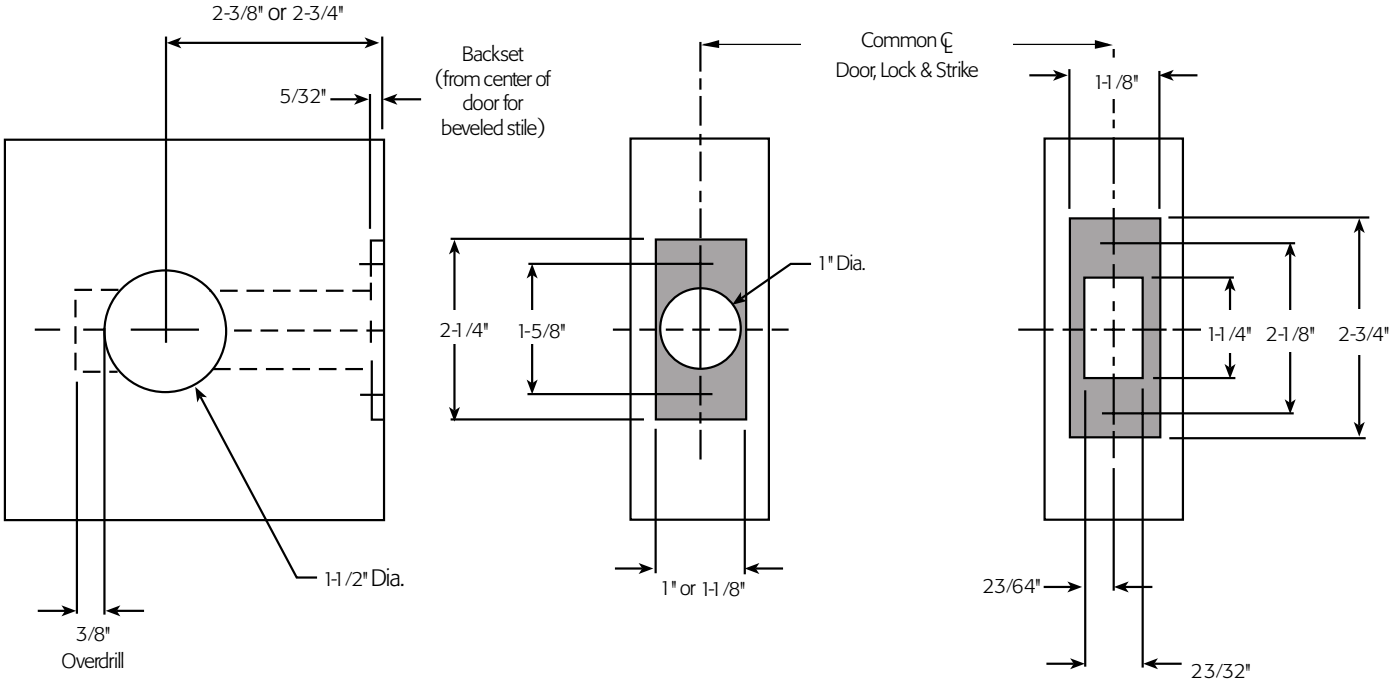

Elevation **Door Edge** **Standard Strike**

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Auxiliary Locks

Cylinder Deadlock (Schoolhouse Safety)

Locked or unlocked by key from outside. Unlocked by turn on the inside. Cannot be locked from the inside. Dead bolt automatically deadlocks when fully extended.

ANSI/BHMA E1171 and E0171

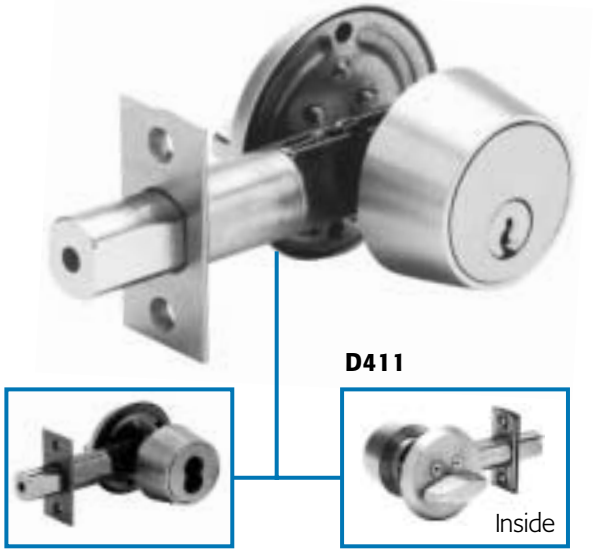

Cylinder Deadlock

Locked or unlocked by key outside. Blank plate inside. Dead bolt automatically deadlocks when fully extended.

ANSI/BHMA E1161 and E0161

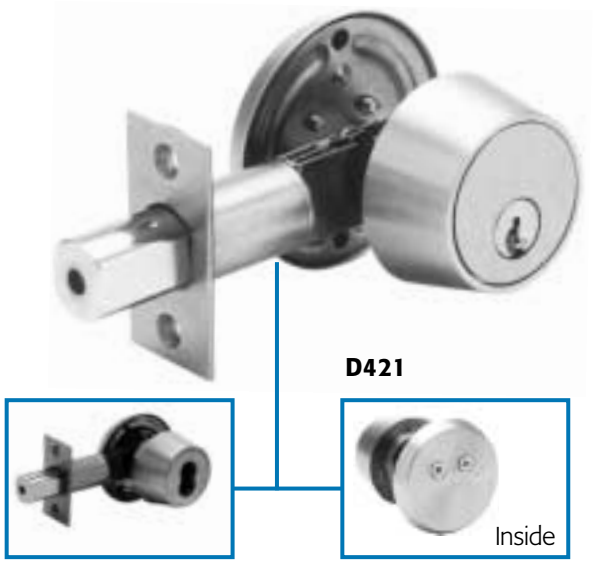

Double Cylinder Deadlock

Locked or unlocked by key from either side. Dead bolt automatically deadlocks when fully extended. The attaching bolts are from inside only and are covered by a permanent type cover(No. 014606-002). ANSI/BHMA E1141 and E0141

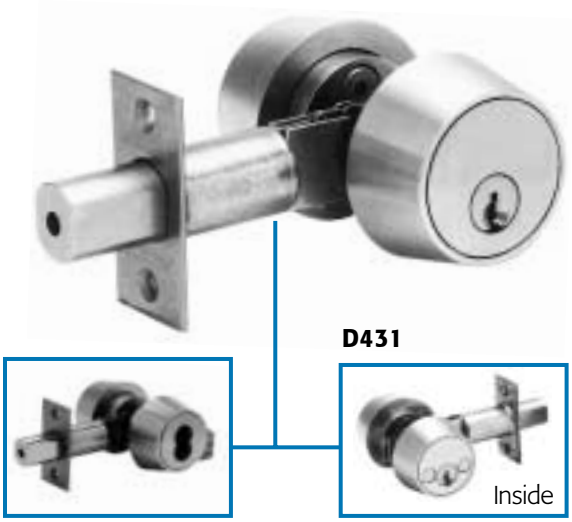

Cylinder Deadlock With Turn

Locked or unlocked by key from outside and by turn on inside. Dead bolt automatically deadlocks when fully extended.

ANSI/BHMA E1151 and E0151

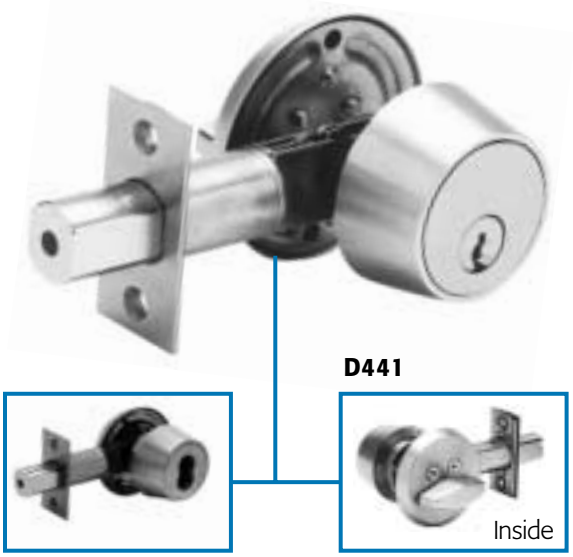

NOTE: • D411 and D441 are available with special 2" handicap lever inside. Specify D411K or D441K.
• Also available UL listed.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

FALCON
Locks & Security Products

Auxiliary Locks

D800 Security Deadlocks 1" Bolt Projection

Door Thickness: 1-5/8" to 1-7/8". Specify for thinner doors and appropriate spacer rings will be included. For thicker doors consult factory.

Backsets: 2-3/4" standard. 2-3/8" also available.

Attachment: Locks are solidly attached to the door by 1/4" heat-treated steel bolts. These bolts pass through a steel plate (D811, D821 and D841) or the inner cylinder housing (D831) and thread directly into the back of the outer cylinder housing. The D831 is provided with (2) regular 1/4" bolts and a tamper proof, one-way bolt as standard.

Handing: Non-handed. May be used in right hand or left hand doors swinging in or out.

Cylinders: Furnished with solid brass plug and housing, drilled with 6 pin chambers, pinned in 5 unless otherwise specified. Available with 6 or 7 pin interchangeable cores. Furnished with two (2) nickel silver keys standard.

Keyways: "G" keyway standard on standard cylinders. "A" keyway standard on I/C core cylinders. Also available with some optional keyways.

Trim: The outer trim (on D831 both trims) is pressure cast material with a crimped on cover to allow for a variety of finishes. (The inner and outer trims are 2-1/2" in diameter.)

Latches: Deadlocks are furnished with latches which have a full 1" projection dead bolt. Housed within the dead bolt is a free-turning, 1/4" thick, hardened steel, saw resistant roller. Furnished standard with 2-3/4" backset. 2-3/4" backset has a 1-1/8" x 2-1/4" faceplate. Optional 2-3/8" backset has a 1" x 2-1/4" faceplate. Consult Options and Accessories section for other optional faceplates.

Strikes: 2-3/4" x 1-1/8" lipless standard. ANSI 4-7/8" x 1-1/4" lipless, 2-1/4" full lip strikes, a 2-3/4" x 1-1/8" T-strike or a security strike are available. Consult Options and Accessories section.

Screws: Furnished with wood/machine screws for use on wood or metal doors or frames.

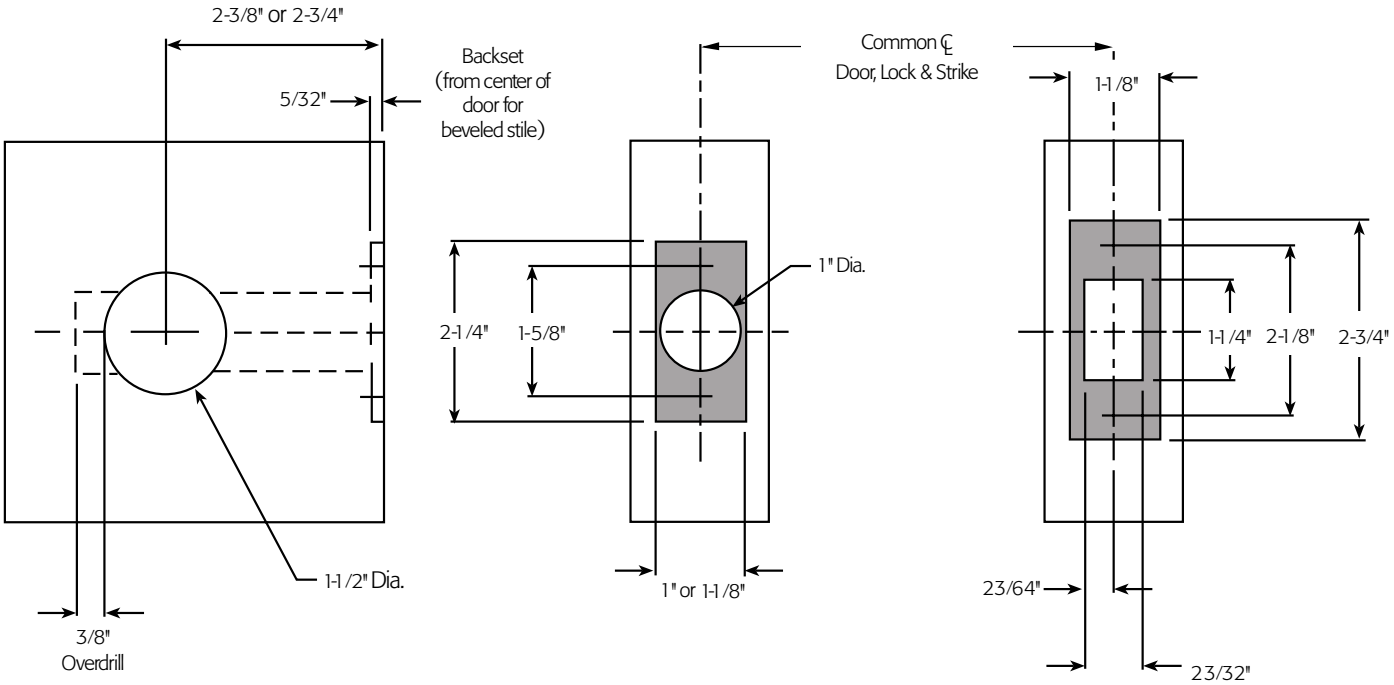

Elevation **Door Edge** **Standard Strike**

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Auxiliary Locks

Cylinder Deadlock (Schoolhouse Safety)

Locked or unlocked by key from outside. Unlocked by turn on the inside. Cannot be locked from the inside. Dead bolt automatically deadlocks when fully extended.

ANSI/BHMA E2172 and E0172

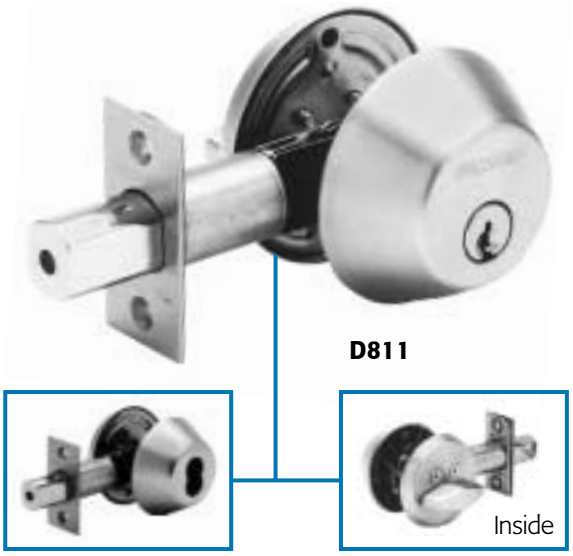

Cylinder Deadlock

Locked or unlocked by key outside. Blank plate inside. Dead bolt automatically deadlocks when fully extended.

ANSI/BHMA E2162 and E0162

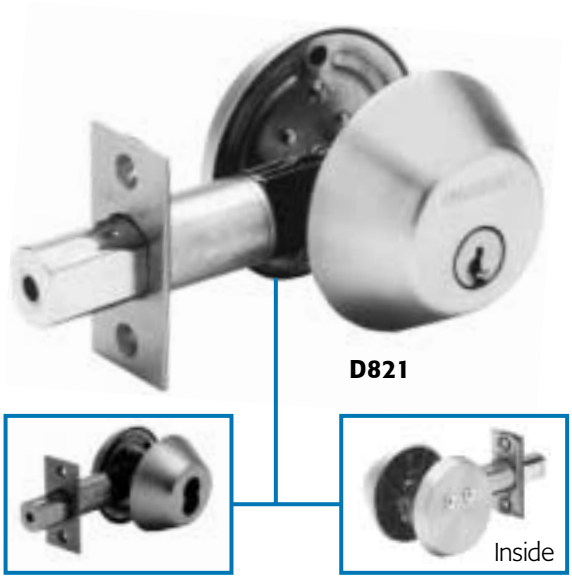

Double Cylinder Deadlock

Locked or unlocked by key from either side. Dead bolt automatically deadlocks when fully extended. The attaching bolts are from inside only.

ANSI/BHMA E2142 and E0142

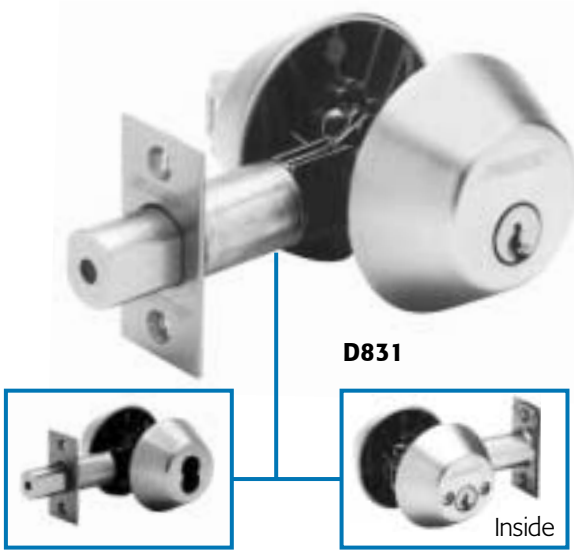

Cylinder Deadlock With Turn

Locked or unlocked by key from outside and by turn on inside. Dead bolt automatically deadlocks when fully extended.

ANSI/BHMA E2152 and E0152

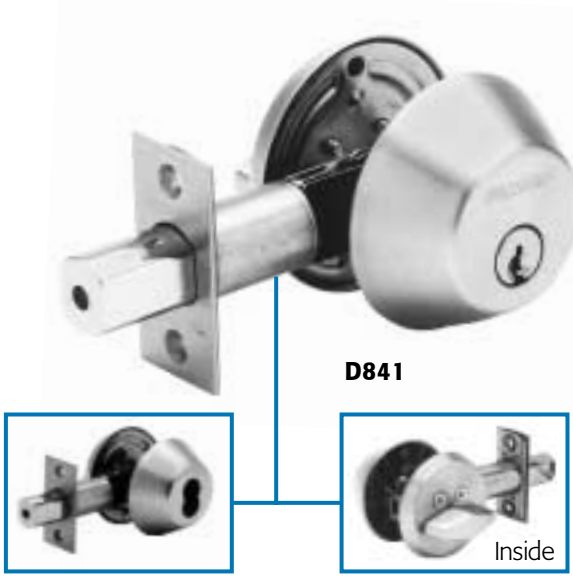

NOTE: • D811 and D841 are available with special 2" handicap lever inside. Specify D811K or D841K.
• Also available UL listed.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

FALCON
Locks & Security Products

Auxiliary Locks

Dead Bolt

For inside locking of exterior doors. Not visible from the outside. Dead bolt automatically deadlocks when fully extended.

ANSI/BHMA E2191, E0191, E2192 or E0192

D861

Dead Bolt

For inside locking of exterior doors. Turn inside, blank plate outside. Dead bolt automatically deadlocks when fully extended.

ANSI/BHMA E2192 or E0192

D861M

Double Turn Dead Bolt

Locked or unlocked by turn on the inside and outside. Dead bolt automatically deadlocks when fully extended.

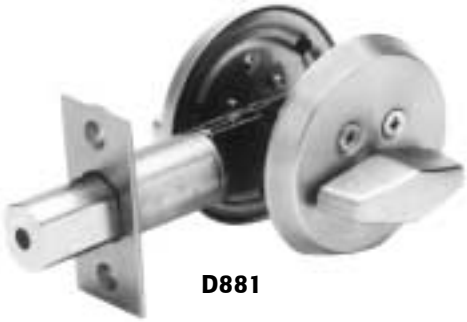

D881

Indicator Dead Bolt

A dead bolt lock, used in conjunction with a regular hotel or motel guest room lock. When locked from inside the room, a dead bolt locks the door, and in addition, a visual OCCUPIED* sign appears in the face of the lock on the outside of the door. The indicator dead bolt lock provides privacy for the guest. The dead bolt can only be operated by the guest when he is in the room, and must be withdrawn by the guest when leaving the room.

*When bolt is retracted, message reads vacant.

Emergency key and instruction tag supplied when requested.

D871

2" Handicap Lever

D861K
D861MK or
D871K

NOTE: D861, D861M and D871 are available with special 2" handicap lever inside.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Auxiliary Locks

H Series Construction Features

Door Thickness: 1-3/8" to 1-3/4".

Backset: 2-3/4" standard, 2-3/8" also available.

Attachment: Outer trims secured to the door by throughbolts through a steel plate on the inside of the door. Inside escutcheon conceals mounting screws.

Handing: Specify hand of door when ordering. Field reversible.

Cylinders: "G" keyway standard. Drilled in 6 chambers, pinned in 5. Pinning in 6 chambers available when specified. Also available with 6 or 7 pin interchangeable core cylinders in H101 function only.

Trim: Roses are wrought brass, bronze or stainless steel, installed over wrought steel reinforcing plates. Knobs are brass, bronze or stainless steel secured by steel knob retainer which cannot be depressed when lock has been locked.

Latches: 1/2" projection, deadbolt has 1" projection with 1/4" hardened steel security roller. 2-3/4" backset with 2-1/4" x 1-1/8" latchface. 2-3/8" backset with 2-1/4" x 1" latchface. Other latchfaces available.

Strikes: (1) 2-3/4" x 1-1/8" T-strike and (1) 2-3/4" x 1-1/8" lipless strike. Consult factory for other sizes and configurations

Mechanism: Cold formed steel, zinc plated and dichromated for rust resistance.

Certification: UL Listed 1-1/2 Hour B Label. ANSI/BHMA A156.12, Grade 2. Lever style trim complies with Title 19, California State Fire Marshal and all state handicap codes.

Trim Design Dimensions

Trim Design	Knob or Lever	Rose Diameter	Projection
H	2-1/8"	3"	2-3/4"
E	2"	3"	2-3/4"
D	4"	3"	2-1/2"

Catalog Number	Function	Description	ANSI No. & Grade
H101		**Entry Single Locking** Latch bolt operated by knob or lever from either side. Rotating turn from inside or key from outside extends dead bolt. Dead bolt and latch bolt retract by rotating inside knob or lever.	F95-2
H451		**Hotel/Motel Lock** Deadlocking latch bolt operated by key outside or or rotating inside knob. Outside knob rigid. Rotating turn from inside or emergency key outside extends dead bolt. Both deadbolt and deadlocking latch bolt retract by rotating inside knob. Depressing spanner button in inside knob operates visual indicator shutting out all keys except emergency key. Rotation of inside spanner button provides lockout feature.	F100-2
H461		**Hotel/Motel Lock** Deadlocking latch bolt operated by key outside or or rotating inside knob. Outside knob rigid. Rotating turn from inside extends dead bolt and changes visual message on outside from vacant to occupied. Both deadbolt and deadlocking latch bolt retract by rotating inside knob. Depressing spanner button in inside knob operates visual indicator shutting out all keys except emergency key. Rotation of inside spanner button provides lockout feature.	F101-2
H511		**Entry Double Locking** Dead bolt thrown or retracted by key in upper lock from outside or by inside turn. Deadlocking latch retracted by key in outer knob when locked by pushing button in inner knob. Outer knob may be fixed in locked position by rotating button. Dead bolt and latch bolt retracted by rotating inside knob.	F96/97-2

FALCON
Locks & Security Products

Auxiliary Locks

K900 Mortise Deadlocks 1" Bolt Projection

Door Thickness: 1-3/8" to 1-3/4". Other thicknesses available, consult factory.

Backset: 2-3/4" only.

Mechanism: Solid brass case and cover, brass interior components, stainless springs. Case is 3-1 3/16" deep x 3" high by 7/8" thick.

Attachment: Locks are attached to the door by two (2) No. 10 24 x 3/8" machine screws or No. 10 wood screws.

Handing: Non-handed (except K911).

Cylinders: Furnished with solid brass plug and housing, drilled with 6 pin chambers, pinned in 5 unless otherwise specified. Also available with 7 pin cylinders. Available with 6 or 7 pin interchangeable cores. Furnished with two (2) nickel silver keys standard.

Keyways: "G" keyway standard on standard cylinders. "A" keyway standard on I/C core cylinders.

Trim: Regularly furnished with 1-1/8" long, solid bar stock brass cylinders with cam. Tapered cylinder guard is standard.

Bolt: 1-3/8" high x 9/16" wide x 1" projection with a free-turning, 1/4" thick, hardened steel, saw resistant roller.

Strikes: 3" x 1-1/8" lipless standard. ANSI 4-7/8" x 1-1/4" available.

Screws: Furnished with wood/machine screws for use on wood or metal doors or frames.

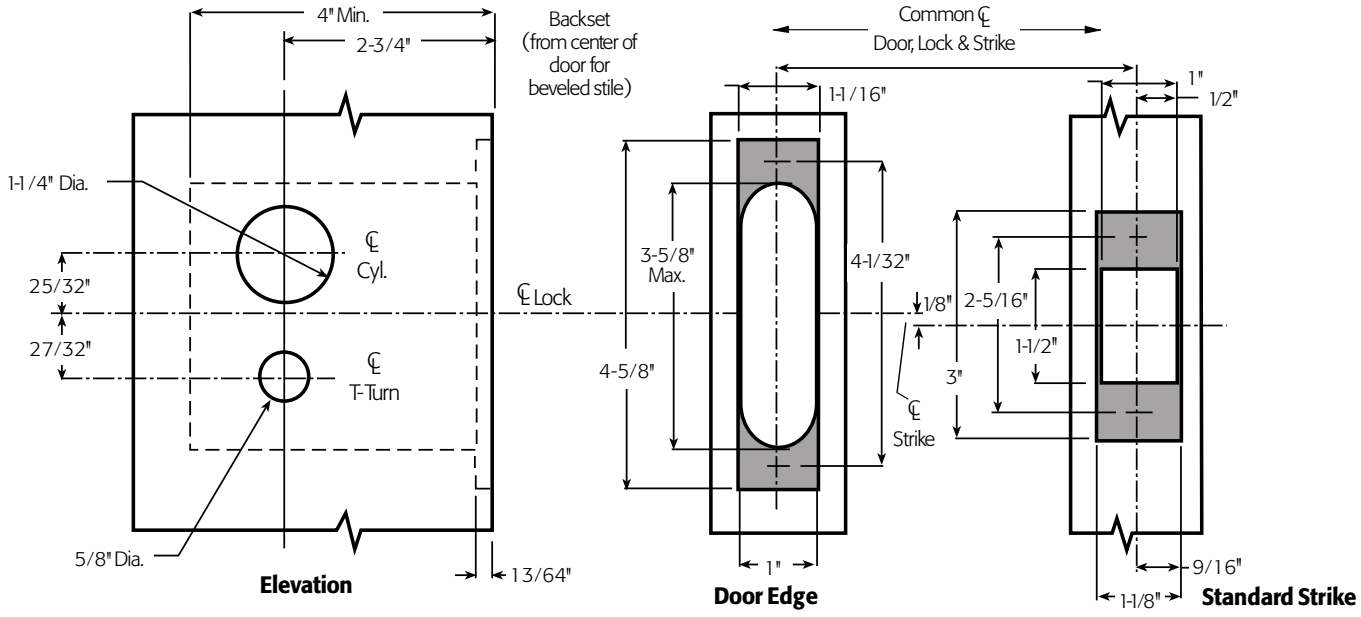

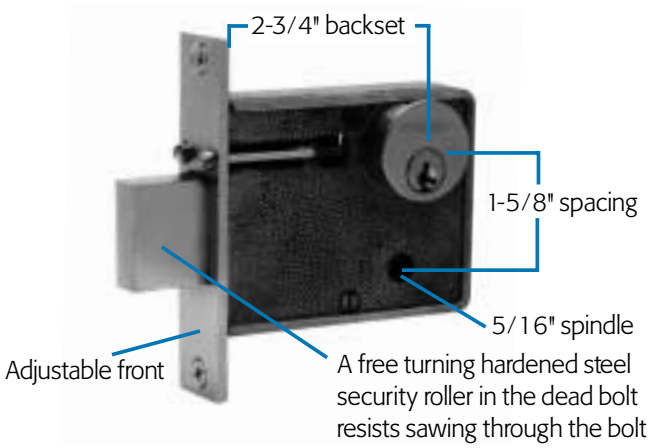

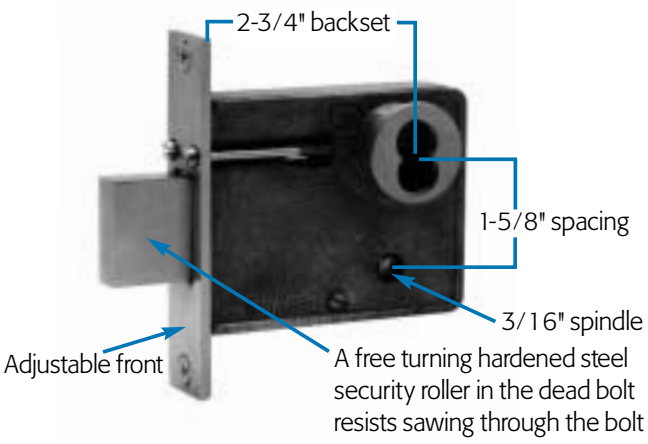

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Auxiliary Locks

Catalog Number	Function	Description	ANSI No. & Grade
K911		**Schoolhouse Safety Deadlock** By key from outside, and by turn from inside. Can be unlocked by turn, but cannot be locked by turn. (Door hand must be specified when ordering.) **Note:** This lock requires a special handed turn cylinder inside.	E16092 E06092
K921		**Cylinder Deadlock** By key from one side only.	E16082 E06082
K931		**Double Cylinder Deadlock** By key from either side.	E16062 E06062
K941		**Cylinder Deadlock** By key from one side and turn from other side.	E16072 E06072
K961		**Deadlock** By turn from one side only.	

Padlocks

A pin tumbler padlock manufactured from solid bar stock brass, with chrome-plated, case-hardened steel shackle. The entire cylinder assembly is removable for easier rekeying or quick cylinder change.

Note: Key is removable in locked position only with DL type padlocks.Padlocks with longer shackles (2" or 6") available when specified.

Cylinders: Furnished with solid brass plug and housing, drilled with 6 pin chambers, pinned in 5 unless otherwise specified. Also available with 7 pin cylinder. Available with 6 or 7 pin interchangeable cores. Furnished with two (2) nickel silver keys standard.

Keyways: "G" keyway standard on standard cylinders. "A" keyway standard on I/C core cylinders. Also available with some optional keyways.

955DL DEADLOCKING TYPE PADLOCK



Sliding Door Locks

Two sliding door locks are available to meet every sliding door need. All are manufactured to the same high standards of appearance and performance as all Falcon locks. SL101 is adjustable for doors 1-3/8" to 1-3/4" thick. SL301 is standard 1-3/8" to 1-5/8". Specify if required for 1-3/4".

Escutcheon Dimensions: Length: 2-3/4" — Width: 2-1/2".

Strike: 1" x 2-1/4" x .050 thick.

SL101 PASSAGE SET

A high quality unit for passage type sliding doors not requiring a lock.

SL301 PRIVACY LOCK

For bathroom or bedroom doors where privacy is desired. Locking turn inside, emergency release outside.

FALCON
Locks & Security Products

Auxiliary Locks

Latches—1" Projection, Standard

Latches for D Series locks are non-UL listed. Available in 2-3/8" or 2-3/4" backsets. Unless otherwise specified, we furnish a 2-1/4" x 1" x square corner faceplate on 2-3/8" backset latches and 2-1/4" x 1-1/8" x square corner on 2-3/4" backset latches.


Square Corner

Radius Corner

Drive-In

Latches– for D400 (except D431) and D800 (except D831) series and upper trim for H series

Catalog Number	Description	Faceplate Size	Corner
A74420-000	2-3/8" Backset Dead Bolt	2-1/4" x 1"	Square
A74421-000	2-3/8" Backset Dead Bolt	2-1/4" x 1"	Radius
A74425-000	2-3/8" Backset Dead Bolt	2-1/4" x 1-1/8"	Square
A76429-000	2-3/8" Backset Dead Bolt	Drive-In	Round
A74430-000	2-3/4" Backset Dead Bolt	2-1/4" x 1"	Square
A74431-000	2-3/4" Backset Dead Bolt	2-1/4" x 1"	Radius
A74435-000	2-3/4" Backset Dead Bolt	2-1/4" x 1-1/8"	Square
A76439-000	2-3/4" Backset Dead Bolt	Drive-In	Round
K74420-00U	UL Deadbolt Latch Kit 2-3/8" Backset	2-1/4" x1"	Square
K74435-00U	UL Deadbolt Latch Kit 2-3/4" Backset	2-1/4" x 1-1/8"	Square

Latches– for D431 and D831 functions only

Catalog Number	Description	Faceplate Size	Corner
A84420-000	2-3/8" Backset Dead Bolt	2-1/4" x1"	Square
A84421-000	2-3/8" Backset Dead Bolt	2-1/4" x1"	Radius
A84425-000	2-3/8" Backset Dead Bolt	2-1/4" x 1-1/8"	Square
A86429-000	2-3/8" Backset Dead Bolt	Drive-In	Round
A84430-000	2-3/4" Backset Dead Bolt	2-1/4" x1"	Square
A84431-000	2-3/4" Backset Dead Bolt	2-1/4" x1"	Radius
A84435-000	2-3/4" Backset Dead Bolt	2-1/4" x 1-1/8"	Square
A86439-000	2-3/4" Backset Dead Bolt	Drive-In	Round
K84420-00U	UL Deadbolt Latch Kit 2-3/8" Backset	2-1/4" x1"	Square
K84435-00U	UL Deadbolt Latch Kit 2-3/4" Backset	2-1/4" x 1-1/8"	Square

Specify finish: 606, 612, 613, 626 or 630.

Strikes



030020-000



010018-001



010019-000



030290-000



005075-000



005051-000



005051-001

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

FALCON Locks & Security Products

Auxiliary Locks

Number 009276-000 2-5/8" Spacer x 1/4" Thick



For use with D800 Series locks on 1-3/8" doors.

Number 1676 2-1/2" Diameter Trim Ring



For D400 Series security trim locks. For use in installing auxiliary locks in a 2-1/8" diameter cross bore.

Dust Boxes



010037-003-70

1" deep. May be used with any 2-1/4" or 2-3/4" high strike.

005099-000-30

1" deep. May be used with any 4-7/8" high (ANSI) strike.

Mounted Samples

Individual mounted lock samples are available in auxiliary locks. Mounted locks are fully operative, thus demonstrating their individual features. Light and portable, they may be easily carried for on-site demonstrations.

Number 945 Standard Cylinder

Cam lock for cabinet doors up to 3/4" thick. Large cam measures 1-1/2" center to end. Provided with 2 cam drivers to allow for rigid cam or lazy cam operation. Lock is field reversible for right hand or left hand doors.



NOTE:
1. Key rotates cam 90°.
2. Set screw limits cam rotation to 90°
3. Key removable in locked or unlocked position.

Number C945 Interchangeable Core Type -Less Core

Cylinders: Furnished with solid brass plug and housing drilled with 6 pin chambers, pinned in 5 unless otherwise specified. Available with 6 or 7 pin interchangeable cores. Furnished with two (2) nickel silver keys standard.

Keyways: "G" keyways standard on standard cylinders. "A" keyway standard on I/C core cylinders.



NOTE:
1. Key rotates cam 360°.
2. Set screw limits cam rotation if required.
3. Key removable in locked position only.

FALCON
Locks & Security Products

Auxiliary Locks

Mounting Screws

Latch and/or Strike Screws

	Description	Phillips Part No. with Phillips Head	Torx® Part No. with Torx® Head	Torx® Bit No.
	12-24 x 1" Combination Wood and Machine Screw	021164-016**	030172-008** (Machine only)	030166-T20-30
	8-32 x 3Ÿ4" Combination Wood and Machine Screw	024416-012	030168-006** (Machine only)	030166-T20-30
	#8 x 3" Bugle Head Wood Screw	030291-048**		

Lock Trim Screws

	Where Used	Description	Part No. with Phillips Head	Part No. with Torx® Head	Torx® Bit No.
	D411, D421, D441, D811, D821, D841	1/4" - 20 x 1.85" Phillips Head Machine Screw	014949-011-30		
	D431	1/4" - 20 x 2-3/4" Special Machine Screw	014949-007-30		
	D831	1/4" - 20 x 3" Pan Head Machine Screw	017516-001*		
	D411, D421, D441, D811, D821, D841, D861, D861M, D881	8-32 x 3/8" Flat Head Machine Screw	002762-000**	030168-006**	T-20
	D861M, D871	8-32 x 1-1/8" Flat Head Machine Screw	002779-001-30		
	D861, D881	#6 x 3/4" Oval Head Sheet Metal Screw	002074-012**		
	951	12-24 Break-A-Way Screw	002799-036-30		

* Substitute tamper proof one-way screw No. 017530-000 is also available.
**Specify finish.

Torx® Bits

Torx® head screws require a special bit (screwdriver) for installation and removal; thus, they are considered a non-removable type screw. Pictured is a Torx® bit for the screws available.

030166-T20-30

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

FALCON Locks & Security Products

Auxiliary Locks

D SERIES—Grade 1

ANSI	Function	Falcon	Best	Corbin/ Russwin	Marks	Sargent	Yale
E0171 E1171	Schoolhouse Safety	D411	D44	83S	DL2017	487	3362
E0161 E1161	Cylinder X Blank	D421	D43	83L	DL2011	486	3332
E0141 E1141	Double Cylinder	D431	D42	83M	DL2012	484	3322
E0151 E1151	Cylinder X Turn	D441	D41	83K	DL2013	485	3312
E0191	Turn Inside Only	D861	D40	83KL	N/A	489	3342

D SERIES—Grade 2

ANSI	Function	Falcon	Best	Corbin/ Russwin	Marks	Sargent	Yale
E0172 E2172	Schoolhouse Safety	D811	D44	N/A	DL2017	487	N/A
E0162 E2162	Cylinder X Blank	D821	D43	73L	DL2011	486	N/A
E0142 E2142	Double Cylinder	D831	D42	73M	DL2012	484	N/A
E0152 E2152	Cylinder X Turn	D841	D41	73K	DL2013	485	N/A
E0192	Turn Inside only	D861	D40	N/A	DL3060	489	N/A

Metric Conversion Table

1/32" = .79mm	3/16" = 4.76mm	1/2" = 12.70mm	15/16" = 23.81mm
1/16" = 1.58mm	1/4" = 6.35mm	9/16" = 14.28mm	1" = 25.40mm
3/32" = 2.38mm	5/16" = 7.93mm	5/8" = 15.87mm	2-3/8" = 60mm
1/8" = 3.17mm	11/32" = 8.73mm	3/4" = 19.05mm	2-3/4" = 70mm
5/32" = 3.96mm	3/8" = 9.52mm	7/8" = 22.22mm	5" = 127mm

FALCON
Locks & Security Products

Falcon Fits

2650 Orbiter Street, Brea, CA 92821-6265
Phone 714-572-6008/800-266-4456
US FAX 800-777-8229/International FAX 714-572-0482
www.falconlock.com

IR Security & Safety®

Pub. No. FA-GN-1014
Ver. 1, Rev. 6/00
©2000 Ingersoll-Rand Company
PC14786