Grade 1 Cylindrical Key-In-Lever Lock Product Catalog

T Series

FALCON
Locks & Security Products

IR Security & Safety®

FALCON
Locks & Security Products

T Series

Falcon Lock Philosophy

"Quality locksets delivered on time" is the Falcon Lock creed. Whether you're ordering Falcon Locks for a retrofit application or specifying Falcon Lock for a major construction project, you're guaranteed personal attention through reliable, dependable service. No hassles. No hold-ups. Our top-quality locksets are delivered to specifically meet your schedule.

Falcon Lock is a member of the IR Security & Safety family, a world-wide division of Ingersoll-Rand Company.

INDEX

Credentials	**3**
ANSI/BHMA	**3**
Underwriters Laboratories	**3**
Federal Specifications	**3**
Americans with Disabilities Act	**3**
General Information	**4**
How to Order	**4**
Finishes	**4**
Lock Features & Specifications	**5**
Lever Designs	**6**
Functions	**7-8**
Cylinders	**9**
Interchangeable Core	**9**
Standard Cylinders	**9**
Competitor Keyways	**10**
Options and Accessories	**11-12**
Latches	**11**
Strikes	**12**
Extension Link	**12**
Dust Boxes	**12**
Construction Keying	**13**
Conversion Chart	**14**

■ Cover: Parkside Corporate Center

General

For over 30 years, Falcon Lock has been manufacturing reliable lock hardware. Our reputation and commitment to providing a high quality product at a reasonable price, with timely delivery, has been rewriting the standard in our industry. Falcon has one of the most extensive lines available on the market today- with a choice of functions and applications to meet and outreach the most demanding requirements.

Falcon locks feature the ultimate convenience and flexibility of an interchangeable core. Whenever a key is lost or stolen, locks can be re-keyed quickly by removing the core and installing a new one—avoiding locksmith services. Our interchangeable cores are also compatible with other small format interchangeable core products.

We continue to keep a pulse on our market by working closely with various agencies and organizations, such as ANSI/BHMA, who are responsible for the writing of specifications and standards. This allows us to improve and meet the needs of a changing market with reliable and flexible locks, delivered on time, exactly when you need them.

We are members of:

All information and specifications contained in this catalog are subject to change. Please consult our current price list or the factory for comprehensive and current product information.

Falcon Lock T Series locksets conform to all performance and dimensional specifications of ANSI/BHMA A156.2, Series 4000, Grade 1. Falcon Lock subscribes to the testing program under the jurisdiction of BHMA.

BHMA: Builders Hardware Manufacturers Association.

ANSI: American National Standards Institute, Inc.

Underwriters Laboratories, Inc. All Falcon Lock T Series locksets are UL listed 3 hour A Label .

Federal Specifications: All Falcon Lock T Series locksets meet or exceed the requirements of FF-H-00106b and FF-H-106C/GEN.

ADA: Americans with Disabilities Act of 1991. All T Series locksets with lever style trim comply with all handicap codes. Additionally, all lever trims (except Avalon, Capri and Java) comply with Title 19, California State Fire Marshal Code.

T Series

FALCON Locks & Security Products

How to Order

For correct ordering, and to ensure no delays in shipment of your order, the following descriptive data must be listed in the sequence shown. Necessary information can be found in other parts of this catalog. The example below shows an order for 12 each T locksets in the 301 Privacy function, D (Dane) trim design in a 626 (satin chrome) finish, with 2-3/4" backset latch, to accommodate doors 1-3/4" thick.

Quantity: Indicate the quantity required.

Catalog Number: Select catalog number.

Trim Design: Indicate letter of lever design required. Example: A=Avalon; D=Dane; Q=Quantum.

Finish: When the finish is the same for the outside and inside trim, it is shown once (626). For split finishes, the outside is designated first, then the inside (605 x 625).

Latches: 2-3/4" backset standard. 3-3/4" and 5" backset available. Adjustable front standard. A Grade 2 latch with a 1" faceplate in 2-3/8" and 2-3/4" backset also available. See page 11. All latches are UL listed 3 Hour.

Strikes: 4-7/8" x 1-1/4" ANSI standard. Optional T-Strike or Full Lip strike available. See page 12.

Cylinder Type: For 6 pin, add 6 pin. For 7 pin, add 7 pin.

Keying Detail: We suggest using the standard terms developed by A.H.C. (Architectural Hardware Consultants).
EXAMPLE: AA1 - Grand Master keyed, Master keyed, change key 1.

Interchangeable Core: To order product capable of accepting an interchangeable core, add **"FIC"** (for interchangeable core). To order product with an interchangeable core, add **"WIC"** (with interchangeable core).

Keyways: "G" is standard on regular cylinders, **"A"** is standard on interchangeable cores. Other keyways available. See page 10 or current price book.

Additional Keys: Add– "total number of keys required."

Large Bow Keys: Add–"with large bow keys."

How to order example

Qty.	Catalog Number	Finish	Latch	Strike	Cylinder	Detail
12	T301	626	2-3/4"	STD	6 PIN	1-3/4" DR

Finishes

The latest in modern techniques and equipment are used to apply the highest quality finish. Extra steps assure durable, consistent finishes and long useful life.

Although we apply the finest available protective plating and/or enamel coating to the surface of our products, these finishes have limitations and in time may deteriorate either from exposure to weather, pollution, perspiration, extremes of climate, frequency of use or other factors. Deterioration of these finishes is, therefore, not a defect, but a normal process which is unavoidable. Our company cannot accept responsibility for finish deterioration in these circumstances and therefore the finishes cannot be guaranteed. These products will not be refinished or replaced under our warranty should deterioration of finishes occur.

Trim Finishes Chart

Description	ANSI No.	Available on
Bright Brass	605	All Trim
Satin Brass	606	All Trim
Satin Bronze	612	All Trim
Satin Bronze Oil Rubbed	613	All Trim
Bright Chrome	625	All Trim
Satin Chrome	626	All Trim

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

Lock Features and Specifications

T Series

FALCON Locks & Security Products

Lock Features

Door Thickness: 1-3/4" to 2-1/8" standard. Thin door adapter kit (A30775-000-00) available for doors thinner than 1-3/4", please specify door thickness. Thicker door locks also available, consult factory.

Backset: 2-3/4" standard. 2-3/8", 3-3/4" and 5" also available.

Mechanism: Parts constructed of brass or cold formed steel, zinc plated and dichromated for rust resistance. Springs are stainless steel.

Attachment: Lock chassis secured to door by threaded mounting nuts. Completely preassembled outer trim and inner spindle assembly are through-bolted over chassis using (2) 10-32 screws. Adding rose and lever to inner spindle assembly completes installation.

Handing: Locks are non-handed.

Cylinders: Drilled with 6 pin chambers, pinned in 5. Pinning in 6 chambers available when specified, at no cost. 7 pin cylinders also available. Cylinder assemblies removable to rekey. Also available with 6 or 7 pin interchangeable core cylinders. Cylinder housings and plugs machined from solid brass. Springs are phosphor bronze. Two nickel silver keys furnished standard.

Keyways: "G" keyway standard on standard cylinders. "A" keyway standard on I/C core cylinders. Also available with some optional keyways. See page 10.

Trim: Roses are heavy wrought brass or bronze, installed over pressure cast rose inserts which are through-bolted through door. Levers are pressure cast (solid levers–no inserts) material finished to match mating parts. See individual designs shown on page 4 for details.

Latches: 1/2" bolt projection, UL listed with latch faceplates 2-1/4" x 1-1/8" with square corners standard. 3/4" projection, UL listed latch with 2-3/4" backset also available. Adjustable front standard. See page 11 for optional latches.

Strikes: 4-7/8" x 1-1/4" ANSI strike with curved lip to meet ANSI A115.2 door frame preparation standard. Consult page 7 for other available strike sizes and configurations.

Screws: Furnished with combination screws for use in wood or metal doors and frames.

Electrified Functions: Available in 12 or 24 VAC or VDC.

ANSI/BHMA: Meets ANSI/BHMA A156.2, Series 4000, Grade 1.

UL: 3 hour A label.

Falcon Lock T Series Specifications

Key-in-lever cylindrical locksets shall be Falcon Lock T Series or equal and meet the following requirements:

- All locks shall meet the new ANSI/BHMA A156.2, Series 4000, Grade 1 for key-in-lever locksets.
- Locksets shall be UL Listed (3 hour A Label).
- Locksets shall be provided standard with Pressure Release™ feature. When outside lever is locked, it is not rigid but will move freely without operating the latch bolt.
- Lever trim shall have individual heavy duty springs behind rose for lever return and to prevent lever sag. Trim shall be through-bolted with two (2) 10-32 screws coated with thread sealant to provide strength and resistance to loosening. Inner and outer trim shall "bottom out" to prevent door collapse. Roses shall be minimum of 3-1/2" diameter.
- All lever designs shall be solid and meet the federal ADA and state disability requirements. Inside levers shall be attached by allen-head set screw to prevent tampering or vandalism.
- Locksets shall adjust to fit door thickness from 1-3/4" to 2-1/4".
- All locksets shall be non-handed and not require field disassembly for re-handing.
- Preparation for door must be non-handed.

Acceptable manufacturer: **FALCON LOCK COMPANY**

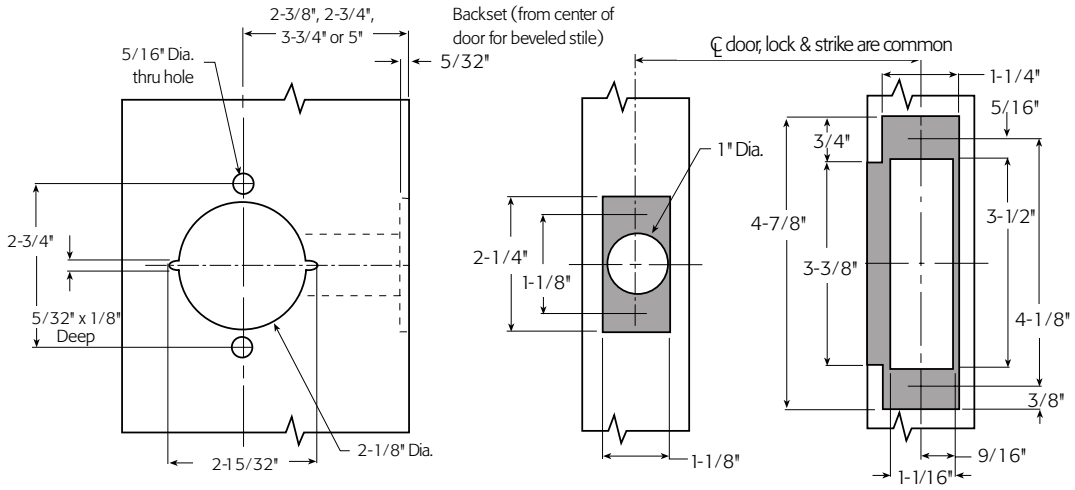

Elevation **Door Edge** **Standard Strike**

T Series

FALCON
Locks & Security Products

Levers

Levers are solid pressure cast zinc, finished to match mating parts. Roses are wrought brass or bronze installed over steel through-bolted rose inserts. Pressure Release™ levers are standard. Levers are secured by a spring-loaded retainer. Retainer cannot be depressed when locks have been locked.

A
Avalon



D
Dane



Q
Quantum



Abrasive Coated Levers

All levers are available with abrasive coating along the length of the lever to identify entrances to hazardous areas for the handicapped. To order add: "with abrasive coated outer lever" in detail section of order.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

T Series

FALCON Locks & Security Products

To order Falcon T Series locksets, please consult page 4 for ordering information and assistance.

Indicates interchangeable core available.

Catalog Number	Function	Description	ANSI No. & Grade
T101		**Passage/Closet Latchset** Latch bolt by levers at all times.	F75-1
T301		**Privacy Lock** Latch bolt by levers. Outside lever locked by push button in inside lever. Rotating inside lever or closing door releases push button. Emergency release in outside lever unlocks door.	F76-1
T351		**Closet Lock** Deadlocking latch bolt by turn knob inside or lever outside except when outside lever is locked by key.	
T381		**Classroom Security Lock** Deadlocking latch bolt by levers except when outside lever is locked by key inside, then by key outside. Inside lever is always free.	F88-1
T411		**Asylum Lock** Deadlocking latch bolt operated by key in lever from either side. Both levers always inoperable.	F87-1
T501		**Entry Lock** Push button locking. Button on inside locks outside lever until unlocked by key or by rotating inside lever. Inside lever always free. Deadlocking latch bolt.	F82-1
T511		**Entry/Office Lock** Turn/push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Push button locking. Pushing button locks outside lever until unlocked by key or by rotating inside lever. Inside lever always free. Deadlocking latch bolt.	F109-1
T521		**Office Lock** Turn button locking. Turning button locks outside lever requiring use of key until button is manually unlocked. Inside lever always free. Deadlocking latch bolt.	F81-1
T561		**Classroom Lock** Deadlocking latch bolt by levers. Outside lever is locked by key in outside lever. Inside lever is always free.	F84-1

T Series

FALCON Locks & Security Products

To order Falcon T Series locksets, please consult page 3 for ordering information and assistance.

Indicates interchangeable core available.

Catalog Number	Function	Description	ANSI No. & Grade
T571		**Dormitory Lock** Deadlocking latch bolt by levers except when locked by push button in inside lever. Key in outside lever locks or unlocks outside lever and releases button. Closing door releases push button. Inside lever always free.	F90-1
T581		**Storeroom Lock** Deadlocking latch bolt by lever inside or key outside. Outside lever is inoperable. Inside lever always free.	F86-1
T851		**Storeroom (Electrified – Fail Safe)** Latch bolt operated by lever from either side except when outer lever is electrically locked. When outer lever is locked (inoperable), latch bolt retracted by key in cylinder outside. 24 volt DC .185 Amps, continuous duty.	
T881		**Storeroom (Electrified – Fail Secure)** Deadlocking latch bolt operated by lever inside at all times. Outside lever inoperable until electrically unlocked, then latch bolt from either side. When outside lever is inoperable latch bolt retracted by key in cylinder outside. 24 volt DC .185 Amps, continuous duty.	
T12		**Dummy Trim** Single Trim-surface mounted rigid lever.	

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

T Series

The Falcon T Series accepts the following competitors standard 6 pin cylinders and Interchangeable cores:

Standard 6 Pin Cylinders*

- Arrow
- Assa
- Corbin Russwin
- Lori
- Medeco
- Primus (Schlage)
- Sargent
- Schlage
- Yale

I/C (Removable) Cores*

- Arrow
- Best
- Corbin Russwin
- Medeco Keymark
- Medeco 32 Series
- Peaks (Kaba)
- Primus (Schlage)
- Sargent
- Schlage
- Yale

*Locks must be modified for some cylinders. Be sure to specify manufacturer when ordering.

Falcon Interchangeable Cores

Catalog Number	Description
C606	For use in all T Series I/C Keyed Locks – 6 pin (cover style)
C607	For use in all T Series I/C Keyed Locks – 7 pin (cover style)
CB806	For use in all T Series I/C Keyed Locks – 6 pin (cap style)
CB807	For use in all T Series I/C Keyed Locks – 7 pin (cap style)

Note: Specify finish: 606 or 626.
Specify keyway: "A" (standard) or other keyway.



Interchangeable Core Cover Style



Interchangeable Core Cap Style

Falcon Standard Cylinders

Catalog Number 5 Pin Cylinder	6 Pin Cylinder	7 Pin Cylinder	Function
A23151-05	A23161-05	A23171-05	All Except 381 I/S, 571
A23151-06	A23161-06	A23171-06	381 Inside Cylinder
A23151-07	A23161-07	A23171-07	571

Note: Specify finish: 606 or 626.
Specify keyway: "E", "G" (standard), "H", "K", "L", "N", "P".



Standard Cylinder

FALCON Locks & Security Products

T Series

Standard Cylinders with Competitor Keyways—6 pin

Catalog Number	Description	Function
A23170-000	Arrow 'O' Bitted	all Except 381 IS, 571
A23170-0KA	Arrow 'KA' Keyed Alike 4	all Except 381 IS, 571
A23170-0KD	Arrow 'KD' Keyed Different	all Except 381 IS, 571
A23167-000	Corbin 60 'O' Bitted	all Except 381 IS, 571
A23167-0KD	Corbin 60 'KD' Keyed Different	all Except 381 IS, 571
A23168-000	Russwin D1 'O' Bitted	all Except 381 IS, 571
A23168-0KD	Russwin D1 'KD' Keyed Different	all Except 381 IS, 571
A23174-000	Corbin/Russwin L4 'O' Bitted	all Except 381 IS, 571
A23166-000	Sargent LA 'O' Bitted	all Except 381 IS, 571
A23166-0KD	Sargent LA 'KD' Keyed Different	all Except 381 IS, 571
A23160-000	Schlage C 'O' Bitted	all Except 381 IS, 571
A23160-0KA	Schlage C 'KA' Keyed Alike 4	all Except 381 IS, 571
A23160-0KD	Schlage C 'KD' Keyed Different	all Except 381 IS, 571
A23159-000	Schlage E 'O' Bitted	all Except 381 IS, 571
A23169-000	Yale 8 (PARA) 'O' Bitted	all Except 381 IS, 571
A23169-0KD	Yale 8 (PARA) 'KD' Keyed Different	all Except 381 IS, 571
A23158-000	Yale GA 'O' Bitted	all Except 381 IS, 571
A23170-011	Arrow 'O' Bitted	381 Inside
A23170-11A	Arrow 'KA' Keyed Alike 4	381 Inside
A23170-11D	Arrow 'KD' Keyed Different	381 Inside
A23167-011	Corbin 60 'O' Bitted	381 Inside
A23167-11D	Corbin 60 'KD' Keyed Different	381 Inside
A23168-011	Russwin D1 'O' Bitted	381 Inside
A23168-11D	Russwin D1 'KD' Keyed Different	381 Inside
A23174-011	Corbin/Russwin L4 'O' Bitted	381 Inside

Note: Specify finish 606 or 626. IS=Inside Cylinder

Catalog Number	Description	Function
A23166-011	Sargent LA 'O' Bitted	381 Inside
A23166-11D	Sargent LA 'KD' Keyed Different	381 Inside
A23160-011	Schlage C 'O' Bitted	381 Inside
A23160-11A	Schlage C 'KA' Keyed Alike 4	381 Inside
A23160-11D	Schlage C 'KD' Keyed Different	381 Inside
A23159-011	Schlage E 'O' Bitted	381 Inside
A23169-011	Yale 8 (PARA) 'O' Bitted	381 Inside
A23169-11D	Yale 8 (PARA) 'KD' Keyed Different	381 Inside
A23158-011	Yale GA 'O' Bitted	381 Inside
A23170-012	Arrow 'O' Bitted	571
A23170-12A	Arrow 'KA' Keyed Alike 4	571
A23170-12D	Arrow 'KD' Keyed Different	571
A23167-012	Corbin 60 'O' Bitted	571
A23167-12D	Corbin 60 'KD' Keyed Different	571
A23168-012	Russwin D1 'O' Bitted	571
A23168-12D	Russwin D1 'KD' Keyed Different	571
A23174-012	Corbin/Russwin L4 'O' Bitted	571
A23166-012	Sargent LA 'O' Bitted	571
A23166-12D	Sargent LA 'KD' Keyed Different	571
A23160-012	Schlage C 'O' Bitted	571
A23160-12A	Schlage C 'KA' Keyed Alike 4	571
A23160-12D	Schlage C 'KD' Keyed Different	571
A23159-012	Schlage E 'O' Bitted	571
A23169-012	Yale 8 (PARA) 'O' Bitted	571
A23169-12D	Yale 8 (PARA) 'KD' Keyed Different	571
A23158-012	Yale GA 'O' Bitted	571

Note: Specify finish 606 or 626.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

T Series

3 Hour

Latches—Grade 1, UL Listed


Square Corner
1/2" Projection


Square Corner
3/4" Projection


1/2" Radius Corner
Projection

Latches for T Series locks are UL Listed. 2-3/4" backset standard. 3-3/4" and 5" optional. 1-1/8" width latch face minimum.

Unless otherwise specified, we furnish a 2-1/4" x 1-1/8" x square corner faceplate on 2-3/4", 3-3/4", or 5" backset latches front standard.

Catalog Number	Description	Faceplate Size	Corner
A98535-000	2-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A98535-0SD	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A98538-000	2-3/4" Backset Spring	2-1/4" x 1-1/8"	Radius
A98538-00D	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Radius
A98835-0SD	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A98838-0SD	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Radius
A98545-000	3-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A98545-00D	3-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A98548-000	3-3/4" Backset Spring	2-1/4" x 1-1/8"	Radius
A98548-00D	3-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Radius
A98555-000	5" Backset Spring	2-1/4" x 1-1/8"	Square
A98555-00D	5" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A98558-000	5" Backset Spring	2-1/4" x 1-1/8"	Radius
A98558-00D	5" Backset Deadlocking	2-1/4" x 1-1/8"	Radius

Note: Specify finish 606, 612, 613, 630.

3 Hour

Latches—Grade 2, UL Listed For Flat or Beveled Doors


Square Corner
1/2" Projection

1/4" Radius Corner
1/2" Projection

Latches for T Series locks are UL Listed. These grade 2 latches have self-adjusting fronts to accommodate beveled or flat front doors.

Unless otherwise specified, we furnish a 2-1/4" x 1" x square corner faceplate on these latches

Catalog Number	Description	Faceplate Size	Corner
A92320-000	2-3/4" Backset Spring	2-1/4" x1"	Square
A92320-00D	2-3/4" Backset Deadlocking	2-1/4" x 1"	Square
A92321-000	2-3/4" Backset Spring	2-1/4" x 1"	Radius
A92321-00D	2-3/4" Backset Deadlocking	2-1/4" x 1"	Radius
A92325-000	2-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A92325-00D	2-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A92330-000	3-3/4" Backset Spring	2-1/4" x 1-1/8"	Square
A92330-00D	3-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Square
A92331-000	3-3/4" Backset Spring	2-1/4" x 1-1/8"	Radius
A92331-00D	3-3/4" Backset Deadlocking	2-1/4" x 1-1/8"	Radius

Note: Specify finish 606, 612, 613, 630.

FALCON
Locks & Security Products

T Series

Strikes

Furnished with a 4 7/8" ANSI Strike unless otherwise specified.



005164-000
ANSI Prep A115.2



A05185-000
T-Strike Square Corner



A05185-004
T-Strike 9/16" Corner



005104-000
Full Lip, Square Corner



005104-001
Full Lip, 1/4" Radius Corner

Note: Specify finish: 605, 606, 612, 625 or 629, 626 or 630

Long Backset Extension Link

A22161-005-00 Link for 5" Backset for use with 2-3/4"backset latches (except 3/4" projection).



A22161-005-00

Dust Boxes



005099-000-30
1" deep. May be used with any 4-7/8" high (ANSI) strike.



012191-003-70
1/2" deep. May be used with any 2-3/4" high (T) strike.



030115-000-70
7/16" deep. May be used with any 2-1/4" (Full lip) high strike.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON Locks & Security Products

Construction Keying

Falcon offers three different construction key systems depending on the size of and application within the project. Both systems permit the installation and use of regular door locks during construction, yet completely preserve the security of the keying system for the ultimate building owner. The Master, Grand Master and change keys are never with the locks during the construction phase of a building. Only the "construction" keys are sent to the job site. Where the job permits, we will utilize the "Lost Pin System" as our standard system for construction keying. Larger or more complicated jobs may require the use of our "Blockokey® System" for construction keying. Where security is of little concern, like for interior doors the "Disposable Construction Core" is recommended.

"Disposable Construction" Interchangeable Cores

This newly designed disposable construction core (1408) is an inexpensive alternative to interior keyed construction cores. This core should be used on interior door applications or where security on a site is not a concern. No keys need to be issued. The disposable core is inserted in the lever or knob and is operated by a thumb turn, which retracts the latch bolt. Please use either brass or permanent construction cores on exterior doors or secured areas.



Locks with "Lost Pin System"

Our "lost" pin construction key system consists of one construction pin and a shallow hole in the side of the plug.



Construction Key—**KB566**

When the "construction" key is used, the construction pin is always in the cylinder plug, sitting on top of the bottom pin.



Master Key—**KB578**

When the Master key is inserted, the construction pin is pushed up into the cylinder housing. As the Master key is rotated to the right, the construction pin will drop into the hole in the plug, thereby eliminating any future use of the construction key.

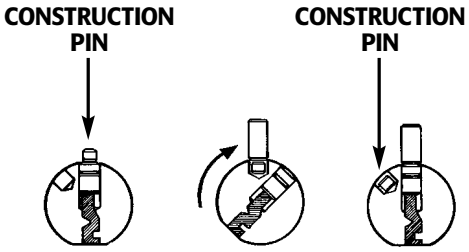

Locks with Blockokey® Cylinders

All lock cylinders on a specific project are operable by a special "project key." Duplicates of this key may be assigned by the building contractor to workmen and subcontractors as required. No regular change keys or Master keys are needed on the job. This eliminates the possibility of subsequent exposure from lost or stolen keys.

How to order locks with Blockokey® Cylinders

Blockokey® locksets are ordered by adding the word "Blockokey" after the balance of the ordering information.
EXAMPLE: 72 Each B511 D 626 1AA-72AA (Blockokey)

How with Blockokey® Cylinders are used

1.



Project Key—**KB531**

Lock cylinder is operated by the special "project key." The last two pins in the cylinder are held inoperative by the key block.

2.



Removal Tool—**KB536**

The special "project key" is canceled out by removal of the key block. A key block removal tool is furnished with the Master keys for the locks. Simply push the removal tool into the keyway, then withdraw it to remove the block. Thereafter, the "project key" will no longer operate the lock cylinder.

3.



Change or Master Key—**KB578**

Cylinder is now only operable by the regular change key or Master key.

FALCON Locks & Security Products

T Series

T Series Grade 1 Heavy Duty Cylindrical Key-In-Lever Lock

ANSI No./Grade	Function	Falcon	Arrow	Best	Corbin/ Russwin	Marks	Sargent	Yale
F75-1	Passage	T101	H01	93KN	CL3310	N	10U15	5401LN
F76-1	Privacy	T301	H02	93KL	CL3320	L	10U65	5402LN
	Closet	T351	-	93RZ	CL3391	-	-	5407LN
F88-1	Classroom Security	T381	H32	93KC	CL3372	DA	10G16	5417LN
F87-1	Asylum	T411	H33	93KW	CL3332	DW	10G17	5430LN
F82-1	Entry	T501	H13	93KB	CL3361	-	10G24	5404LN
F109-1	Dormitory	T511	-	93KAB	CL3351	AB	-	-
F81-1	Entry/Office	T521	H11	93KAB	-	-	10G05	5407LN
F84-1	Classroom	T561	H17	93KR	CL3355	S	10G37	5408LN
F90-1	Entry/Office	T571	H19	93KT	-	T	10G54	5422LN
F86-1	Storeroom	T581	H12	93KD	CL3357	F	10G04	5405LN
	Storeroom-Fail Safe	T851	-	93DEL	-	FEL	10G70	-
	Storeroom-Fail Secure	T881	-	93DEU	-	FEU	10G71	-
	Dummy-Single	T12	H08	1DT	CL3350	DO	10U94	455LN

Trim Styles	Falcon	Arrow	Corbin/ Best	Russwin	Marks	Sargent	Yale
	Dane	SR	15D or L	NZD	195/195R	LL	AU
	Quantum	-	14D or L	PZD	295/295R	LP	PB
	Avalon	-	16D or L	AZD	-	LB	MO

All effort has been made to make this information comprehensive. Since no two products are exactly alike, this data represents those products which are similar. This information was obtained from trade services and is not guaranteed nor meant to represent any product as equal to any other product.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Falcon Fits

2650 Orbiter Street, Brea, CA 92821-6265
Phone 714-572-6008/800-266-4456
US FAX 800-777-8229/International FAX 714-572-0482
www.falconlock.com

Security & Safety®

Pub. No. FA-GN-1004
Ver. 1, Rev. 6/00
©2000 Ingersoll-Rand Company
PC14670