SARGENT®

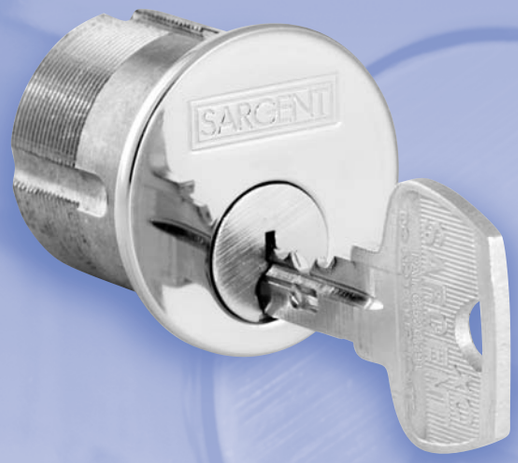

XC Series Cylinders

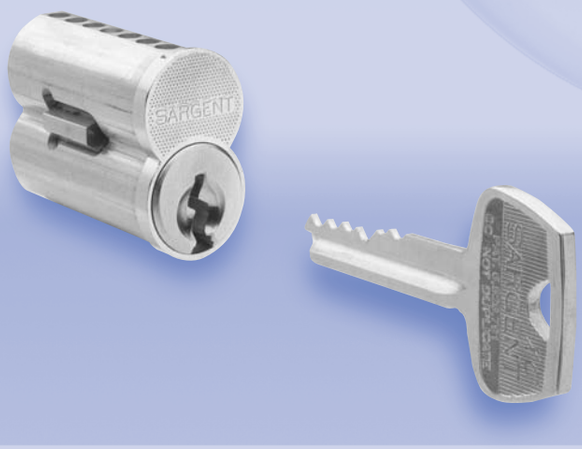

An ASSA ABLOY Group company

ASSA ABLOY

XC Series

SARGENT
1-800-727-5477
www.sargentlock.com

Table of Contents

Key Management Software 1
Features, Benefits & Components 2
Bored & Auxiliary Lock Cylinders. 3
Mortise/Rim Cylinders, Rosettes & Blocking Rings 4
11-7P-7300B Interchangeable Cores 5
Construction Master Keying & Padlocks 6
Key Control Comparison & Key Blanks 7
Visual Key Control & Tamper Proof Packaging. 8
Architectural Specifications & How to Order 9

SARGENT's Pyramid of Cylinder & Key Control

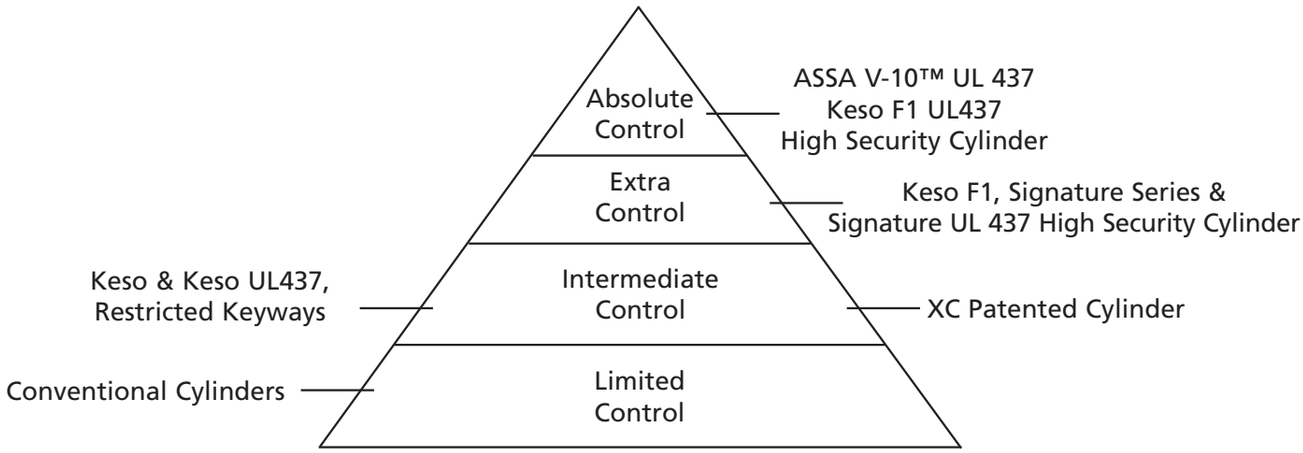

See product catalogs for more information

On the Cover

11-41 Mortise Cylinder
11-7P-7300B Small Format Interchangeable Core

An ASSA ABLOY Group company
ASSA ABLOY

XC Series
Key Management Software

SARGENT
1-800-727-5477
www.sargentlock.com

SARGENT'S KeyWizard™ 4.0 Software Package Tracks Multiple Key Systems Including Keys, Keyholders, Locations and Hardware Information

This comprehensive key management software package was developed for locksmiths and end-users to track detailed information. The program features easy to navigate, non-cluttered screens and uses a format similar to Microsoft® Outlook™.

Features:

- Free technical support & free upgrades for one year
- Clear easy to read screens
- Multi-level password protection
- Manages multiple end-users and multiple key systems for most manufacturers
- Customized query, reporting, and search capability
- Global key search across multiple masterkey systems
- Comprehensive hardware listings for door locations
- Displays keyholder photos and signatures for identity verification
- Audit trail history of all key holder keys transactions
- Automatic reminders for maintenance, back-ups, and overdue keys
- Accurate key symbol sorting
- Create cylinder assembly diagrams
- Key authorization tracking
- Customized facilities' logos can now be added to key issue authorization forms
- Customized key receipts and authorization forms
- Tracking of loaned keys and key deposits
- Stores maintenance service history records
- Importing of key systems, keyholders and locations
- Exporting of key systems and locations
- Network and stand-alone versions available

Key Wizard
By SARGENT®

How to Order:	Part Number
Single License Version	**KW-SS1**
Network Version	**KW-SSN1**
Demonstration Version	**KW-DEMO1**
KeyWizard floppy disk with new masterkey system (when purchased with hardware)	**DLKW1**
KeyWizard floppy disk with existing key systems*	**DLKW2**

KeyWizard replacement for KeyMinder
(Consult factory for eligibility requirements)

Single License Version	**UP-KW-SS1**
Network Version	**UP-KW-SSN1**

* Please consult factory for the availability of existing systems for use with KeyWizard.

Computer System Recommendations:

REQUIRED:

- 350 MHZ processor or greater
- Windows® 98, 2000, ME, NT or XP
- 16 MB RAM
- CD Drive
- Mouse pointing device
- 60 MB hard disk space

RECOMMENDED For Optimum Performance:

- 500 MHZ processor or greater
- Windows® 98, 2000, ME, NT or XP
- 64 MB RAM
- CD Drive
- Mouse pointing device
- 70 MB hard disk space

XC Series
Features, Benefits & Components

SARGENT
1-800-727-5477
www.sargentlock.com

Features

- Patented product with key blanks only available through authorized SARGENT distributors
- Available in finished locks, complete cylinder assemblies and shell/plug components
- Available in several standard SARGENT keyways
- XC keys can be cut to operate non-XC cylinders. Field cut easily on standard key duplicating machines
- Available for most SARGENT lock products in conventional, construction, removable core and SFIC cylinders
- Small Format Interchangeable Cores in SARGENT 4A & 4B

Benefits

- Increases security and key control by limiting unauthorized duplication
- Versatile design for new systems, retrofits and easy field maintenance or construction keying
- Cost effective method to increase security of existing systems without having to install a complete new system
- Security of a system can be increased where needed without having to issue all new keys
- Maintain and expand existing key systems using similar SARGENT products
- The interchangeable core option allows for fast and easy change of keying without having to disassemble the lock from the door or cylinder from knob/lever

Components

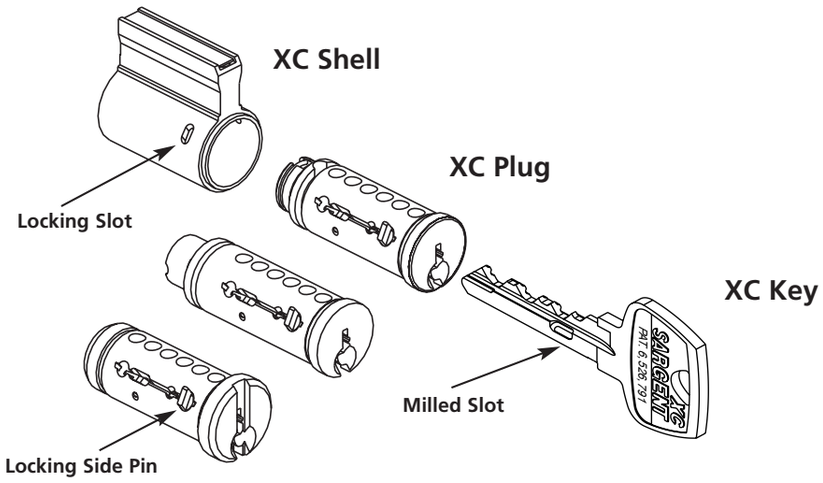

XC Shell*

A locking slot is machined into the XC shell for the plug's locking side pin to engage in. The locking pin is normally inserted in the slot, preventing plug rotation. With a properly cut and side milled XC key inserted, the plug rotates freely in the shell.

XC Plug*

Factory loaded with the locking side pin mechanism. The locking pin extends into the XC shell, preventing rotation, until a properly cut side milled XC key is inserted.

XC Keys*

The XC key has a side milled slot to operate the locking side pin mechanism in the plug. Location of the slot varies with keyway used; easy standard key cutting can be done in the field and XC keys will operate standard SARGENT non-XC cylinders. Two keys are provided standard with each cylinder.

* U.S. Patent No. 6,526,791

XC Series
Bored & Auxiliary Lock Cylinders

SARGENT
1-800-727-5477
www.sargentlock.com

Shell & Slide Assembly

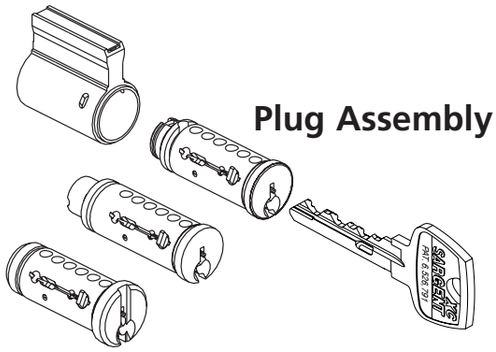

Bored Locks

Locks	Complete 6 pin Assembly	Plug Assembly	Shell & Slide Assembly
6 "B" Knob	13-4566	13-4332	13-4336
6 "S", "N" Knobs	13-4564	13-4332	13-4336
7, 8, 9 Knobs	13-4568	13-4331	13-4335
7L, 8L, 10, 6500	13-4560	13-4332	13-4334
T-Zone	13-4562	13-4332	13-4334
5500	13-4570	13-4328	13-4338
7600	13-4582	13-4312	13-4339

- Available for all functions except 50 function
- Plug finishes: 4,15

Auxiliary Locks (Deadbolts)

Locks	Complete 6 pin Assembly	Plug Assembly	Shell & Slide Assembly
464	13-4578	13-4329	13-4337
465	13-4580	13-4329	13-4337
474	13-4572	13-4330	13-4337
475, 486	13-4576	13-4330	13-4337
484	13-4572	13-4330	13-4337
485, 487	13-4574	13-4330	13-4337

- Plug finishes: 4, 15

Note:
Parts shown on this page are unique to the XC feature. These plugs and shells cannot be used with non-XC components.
For all other cylinder components, refer to the standard Cylinder & Components section.
XC 11- prefix not available with 10-, 10UL-, 22-, 51-, 52-, 82-, 83-, 84-, SC- or SE- prefixes.

XC Series
Mortise/Rim Cylinders
Rosettes & Blocking Rings

SARGENT
1-800-727-5477
www.sargentlock.com

11-40 Series Mortise Cylinders

Complete 6 pin Assembly	Dim. X Length Under Cylinder Head	Plug Assembly	Shell & Slide Assembly
11-41	1-1/8" (29mm)	13-4314	13-4301
11-42	1-1/4" (32mm)	13-4315	13-4302
11-43	1-3/8" (35mm)	13-4316	13-4303
11-44	1-1/2" (38mm)	13-4317	13-4304
11-46	1-3/4" (44mm)	13-4318	13-4305
11-48	2" (51mm)	13-4319	13-4306
11-50	2-1/4" (57mm)	13-4320	13-4307
11-52	2-1/2" (64mm)	13-4321	13-4308
11-54	2-3/4" (70mm)	13-4322	13-4309
11-56	3" (76mm)	13-4323	13-4310

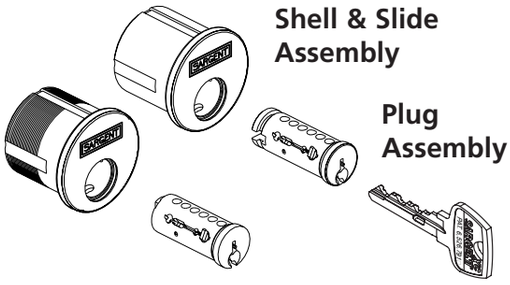

- Cylinder: Solid brass, 1-5/32" (29mm) diameter
- Cap: Brass, bronze or stainless steel
- Available for all functions, except 50 function
- Furnished standard with No. 97 rosette and compression spring
- Mortise cylinder assemblies that are ordered without hardware are supplied with standard SARGENT offset cam 13-0660, except for 11-41 which uses 13-0664
- Cylinder finishes: 3, 4, 9, 10, 10B, 10BL, 20D, 26, 26D, 32, 32D
- Plug finishes: 4, 15

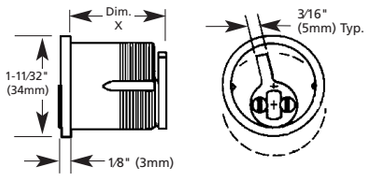

11-34 Rim Type Cylinders

- Complete assembly (6 pin), specify 11-34
- Plug assembly, specify 13-4312
- Shell & slide assembly, specify 13-4299
- 27/32" (21mm) screw pattern for through-bolted SARGENT exit devices
- Cylinder: Solid brass
- Cap: Brass, bronze or stainless steel
- Furnished standard with No. 97 rosette and compression spring, "break-off" screws and back plate
- Horizontal tail piece only
- Cylinder finishes: 3, 4, 9, 10, 10B, 10BL, 20D, 26, 26D, 32, 32D
- Plug finishes: 4, 15

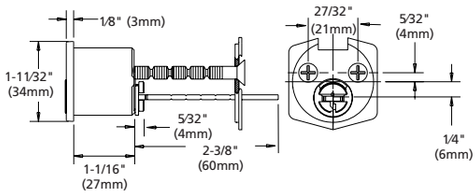

Optional Cams for use with the 40 Series Mortise Cylinders

13-0512	Adams Rite (1850)
13-0513	Adams Rite (4070)
13-0938	Schlage L
13-0660	SARGENT standard closed
13-0664	SARGENT standard open slotted
13-0665	Inside cam for 8216 & 8292
13-0921	4370 Key switch & Russwin #11
13-0097	Misc. "open"
01-1121	Screw (2 required)

No. 1KB Rosette

- Used with mortise cylinders and No. 90 blocking rings when cylinders project from door
- 1-1/2" (38mm) diameter, includes compression spring
- Projection from door:
  1KB-1 5/16" (8mm)
  1KB-2 7/16" (11mm)
  1KB-3 9/16" (14mm)

No. 97 Rosette

- Standard for cylinders ordered separately from hardware
- 1-11/16" diameter (43mm), 9/32" (7mm) projection, includes compression spring

No. 90 Blocking Ring

- Used with 1KB rosettes as spacer when mortise cylinder projects from face of door
- 1-3/8" (35mm) diameter; 1/16" (1.6mm) to 3/8" (9mm) projection in 1/16" (1.6mm) increments. Specify size when ordering.

Note:
Parts shown on this page are unique to the XC feature. These plugs and shells cannot be used with non-XC components.
For all other cylinder components, refer to the standard Cylinder & Components section.
XC 11- prefix not available with 10-, 10UL-, 22-, 51-, 52-, 82-, 83-, 84-, SC- or SE- prefixes.

XC Series
11-7P-7300B Interchangeable Cores

SARGENT
1-800-727-5477
www.sargentlock.com

11-7P-7300B Series Small Format Interchangeable Core Cylinders 7 Pin Only

- SARGENT XC Interchangeable Core Cylinders are patented key and cylinder for increased security. With a control key these cylinders can be easily removed for rekeying. It is unnecessary to remove the lock from a door to rekey the opening
- SARGENT 11-7P Interchangeable Cores are available in SARGENT 4 and 4B keyways
- 4A Keyway will be supplied standard on new systems
- A2 or A4 systems available
- Existing SARGENT mortise cylinders require core mounting pin modification, use pin shear tool (p/n: 431-7)
- Existing SARGENT bored locks require new tail pieces to accept XC SFIC cores

T-Zone (11 Line)	11-0271
10 Line	07-0278
7 Line	07-0275
6500 Line	05-0040

- XC 11- prefix not available with 10-, 10UL-, 22-, 51-, 82-, 83-, 84-, SC- or SE- prefixes
- U.S. Patent No. 6,079,240

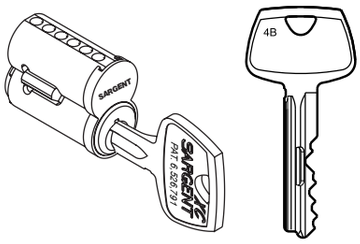

11-70- Prefix Disposable Plastic Construction Core For SFIC

- Used for those doors that do not require key locking during the construction but will be receiving permanent 11-7300 B cores
- Operate with coin or flat screw driver
- Two piece design allows for easy installation
- To order separately:
  13-0964 Bottom half
  13-0965 Top half



Key Blanks/Cut Keys (Nickel Silver)

- Available in quantities of 100 each
- Packed 50 per box
- SARGENT Keyways: 4A, 4B
- Order by 11-6285B x Keyway
- Cut Master key 11-6282B x Keyway



11-73-7P-34 Rim Cylinder

- Brass cylinder and housing
- Furnished with No. 97 rosette, break off screws and back plate
- Housing accepts 7 pin core only
- Mounting holes located to match SARGENT hardware



- Finishes: 3, 4, 10, 10B, 26, 26D

11-7P-7300B Keyed Interchangeable Core

- Supplied with two nickel silver keys as standard
- Face includes SARGENT logo
- 11-7P-7300B (7 pin)
- If Control or Master key is required, order 11-6282B x Keyway
- Finishes: 4, 15

11-65-7300B Uncombinated Interchangeable Cores

- Cores for field keying
- No pins, springs or key blanks provided
- No logo on face
- 11-65-7P-7300B (7 pin)
- Finishes: 4, 15

11-72-7P Prefix Brass Interchangeable Construction Core

- SARGENT 7200 Interchangeable brass construction core (order 11-72-prefix with your SARGENT products) enables doors to be locked during the construction
- Using 11-7200 cores prevents the keys to the permanent key system from becoming available during the construction process
- After construction is completed the 11-7200 brass cores are removed and replaced with 11-7P-7300 keyed-permanent interchangeable cores
- Plug face is blue for easy identification
- A special Control key (11-7272) releases the locking sleeve of the construction core and allows for immediate removal of the core
- Construction cores are 7 pin and keyed alike
- Six (6) change keys and one (1) Control key is included
- Cores shipped with hardware

11-73-7P-40 Series Mortise Cylinders

- Two cylinder sizes
- #43, 1-3/8" (35mm) length under cylinder head including cam
  - 11-73-7P-43 (7 pin)
  - 11-70-43 shell less core
- #46, 1-3/4" (44mm) length under cylinder head including cam
  - 11-73-7P-46 (7 pin)
  - 11-70-46 shell less core
- 1-5/32" (29mm) diameter housing
- Furnished with (#97) cylinder rosette as standard
- Cam is permanently staked to housing
- Housing accepts 6 or 7 pin cores
- Mortise cylinder cams operate current SARGENT hardware
- Hotel Function not available
- Finishes: 3, 4, 10, 10B, 26, 26D

XC Series
Construction Master Keying & Padlocks

SARGENT
1-800-727-5477
www.sargentlock.com

21– Prefix Lost Ball Construction Keying

Cylinders ordered in SARGENT keyways with construction keying will include the 21- prefix Lost Ball feature as standard. This replaces the 22- split key, only available as additions to existing 22- master keyed systems. The 21- is not available with old or new style removable core (5100, 6300 or 7300). If construction keying is required for removable cores, use 52- or 64- construction keyed cores.

With the lost ball option, construction keying is obtained without the nuisance of going back to each cylinder and removing the construction split key when the building gets turned over.

With this feature, the 21- cylinder is master keyed with 3 small ball bearings in one of the chambers. The plug is drilled in two places along both sides of the same chamber containing the balls. This allows the construction master key to be used, while leaving these balls in the chamber above the plug when the key is rotated. When it is time to void the construction key, simply using the change (day) key will allow these balls to fall into the holes in the plug. The construction master key will now no longer operate the lock.

Field construction (21- lost ball) keying can also be easily accomplished with the # 439 LOST BALL REKEYING KIT. The kit includes a drilling block, knurled pin, 500 balls and drill with collar.

Orders with 21- will have all change keys shipped separately from hardware.

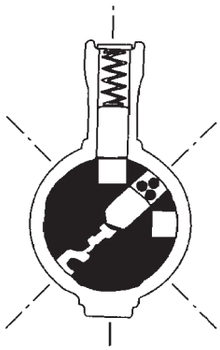

Cutaway cylinder showing construction master key being used. Note the two empty holes on either side of the chamber

To Void Construction Key



Change key inserted in cylinder.



As change key rotates, construction balls fall into hole in the side of plug.



Change key rotated to position for extraction.



Construction key inserted after balls are trapped. Driver now extends into plug chamber. Construction key will not rotate.

11-758 Padlock Features

- Cylinder easily removed while in the unlocked position for rekeying
- 6 pin cylinder standard
- Shackle locked by dual ball bearings
- Higher Security key capture feature standard
- Key removable in locked position or when turning shackle 180° open. Key is then required to relock
- All shackles 5/16" (8mm) diameter
- Optional 11-63 XC removable core available

Complete Padlock	11-758 x Shackle height
Shackle Height (closed)	1" (25mm) standard, 2" (51mm) (-2 suffix) and 4" (102mm) (-4 suffix)
Shackle Material	Stainless steel -standard Boron hardened steel (-HS suffix) Brass chain 9" (228mm) long (-C suffix)
Cylinder assembly with tail piece	13-4584
Plug assembly	13-4332
Shell & Slide assembly	13-4334
Tail piece only	13-1230

11-758-C Shown
(Optional chain shown)

Note:
XC 11- prefix not available with 10-, 10UL-, 22-, 51-, 52-, 82-, 83-, 84-, SC- or SE- prefixes.

XC Series
Key Control Comparison & Key Blanks

SARGENT
1-800-727-5477
www.sargentlock.com

XC vs. Standard Keyway Control

NOTE: XC keys and master keys will operate non-XC cylinders.
Chart shows how XC key is fully compatible with non-XC cylinders

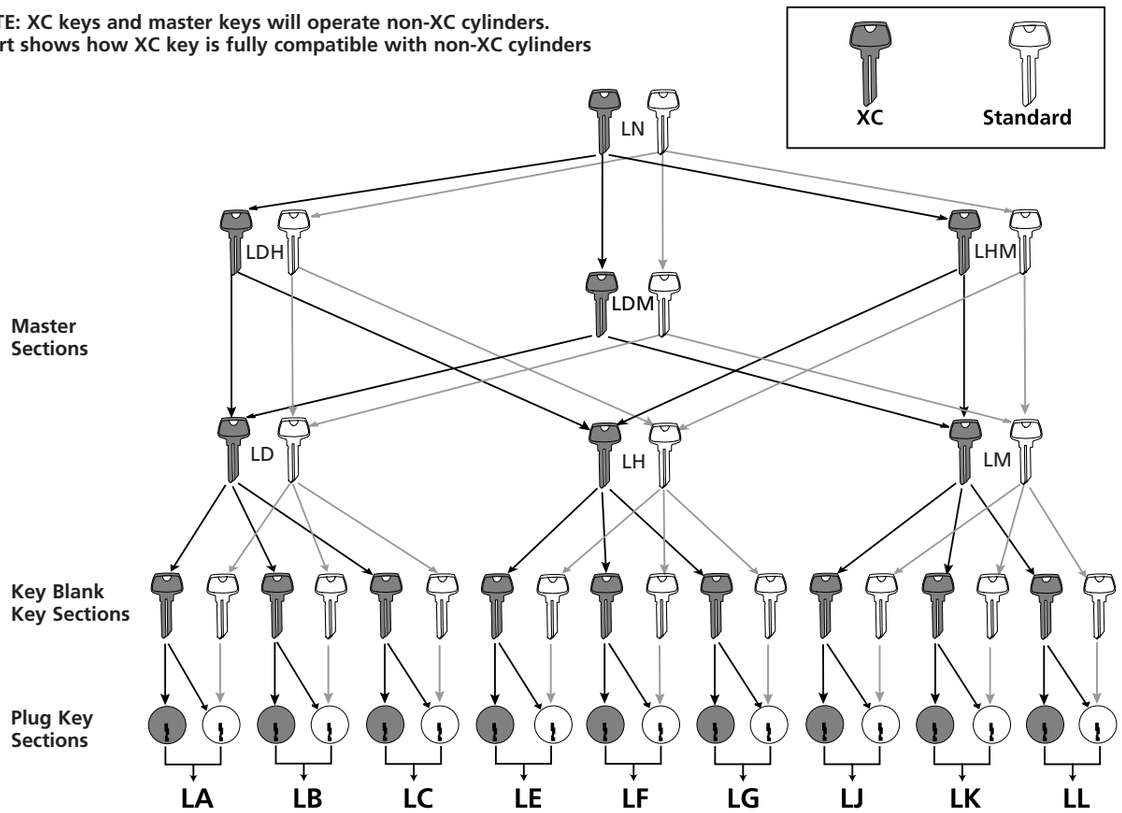

LA family shown above, also available in SARGENT R Multiplex family.
For availability of restricted keyways, contact SARGENT Key Records Department.

SARGENT Keyways			Small Format Interchangeable Core Keyways
Master Key Section (6 Pin)	**Day or Change Key (6 Pin)**		**Master/Day/Change Key (7 Pin only)**
Catalog Number 11-6270	Catalog Number 11-6275		Catalog Number 11-6285B
LD	LA	RA	SARGENT 4A
LH	LB	RB	SARGENT 4B
LM	LC	RC	
LDH	LE	RE	
LHM	LF	RF	
LN	LG	RG	
RD	LJ	RJ	
RH	LK	RK	
RM	LL	RL	
RDH			
RDM			
RHM			
RN			

- Packed 50 per box
- Order by Catalog Number x Keyway
- Order cut master key as 11-6282B x Keyway

XC Series
Visual Key Control
Tamper Proof Packaging

SARGENT
1-800-727-5477
www.sargentlock.com

Visual Key Control (Stamping)

To allow for easier key and cylinder identification, SARGENT offers the option for permanent stamping of keys and/or cylinder with industry standard alpha-numeric keyset symbols.

Non-visual key control stamped change (day) keys include bitting numbers as standard, (Item A) unless requested to be omitted on the order. Signature and visual key control change keys are stamped with keyset symbols.

Master level keys do not include bitting numbers. Master level keys include system register numbers stamped on the first line, and the standard visual key control designations on the second line (Item B).

Up to 7 characters available for permanent stamping for Visual Key Control

- Key and cylinder identified by industry standard alpha-numeric keyset symbols
- Easy visual identification on the face of the plug (Item C or Item G)
- Concealed stamping on mortise and rim shells available (Item D)
- Cylinder-slide stamping only available on 5100 and 6300 SARGENT removable cores only (Item E)
- Core side engraving available for 7300B Series up to 7 characters (Item F)
- Special key stampings available, such as “DO NOT DUPLICATE” or “CITY OF PHOENIX”
- XC and Signature cylinders not available with visual plug stamping
- XC and Signature mortise or rim shells available with concealed shell stamping (Item D) only
- Signature removable cores 10-6300 available with cylinder slide stamping (Item E)

NOTE: SARGENT will stamp alternate identity codes whenever requested. If the Visual Key Control stamping is not desired, an alternate code for stamping the individual identity of the Master Level Keys can be substituted.

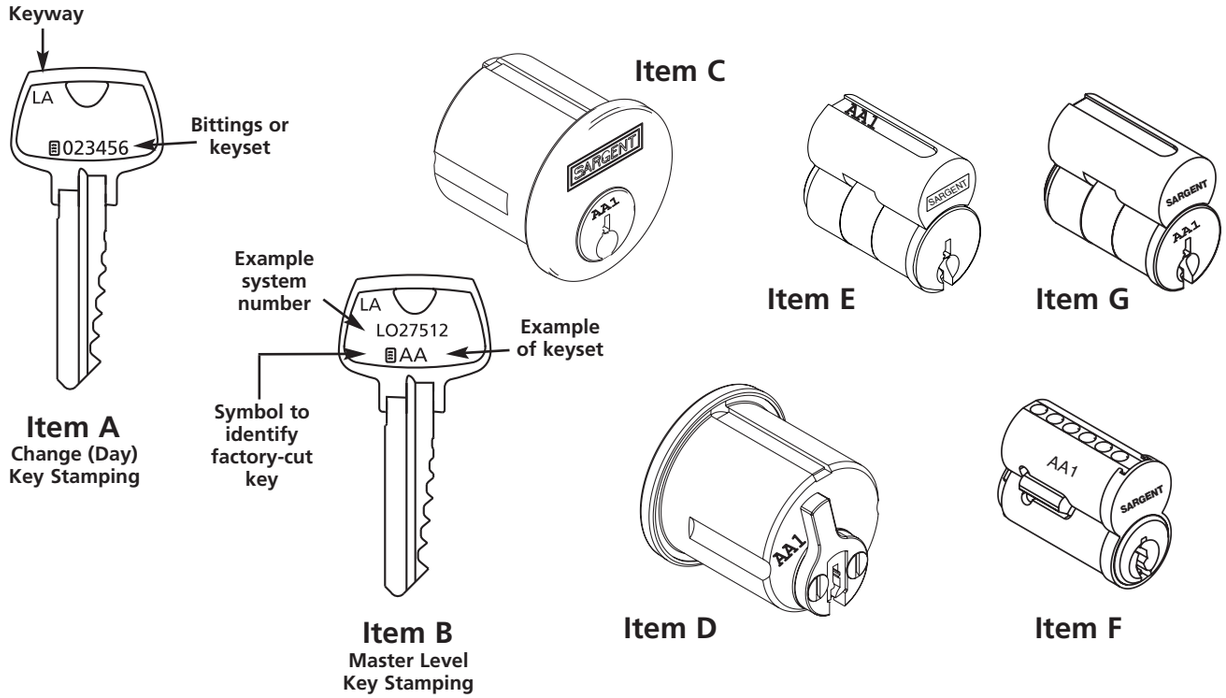

Tamper Proof Packaging

For the highest level of security for the end user, Tamper Proof Packaging is used on all Master Keys, Signature key blanks and all restricted key blanks. This heat sealed shrink wrap identified with “SARGENT Sealed For Your Security” provides assurance of the integrity of the factory generated key system.

XC Series
Architectural Specifications/How to Order

SARGENT
1-800-727-5477
www.sargentlock.com

Architectural Specifications

2.0 CYLINDERS, KEYS, AND KEYING - Standard Cylinder (Non-removable Core)

A. Acceptable Manufacturer and Series (No Substitutions):

Manufacturer	Series
SARGENT	XC

B. Provide cylinders and keys protected from unauthorized manufacture and distribution by manufacturer's United States patents.

C. The key design and tolerances shall permit the cutting of keys with standard code or duplicating machines. The requirement for a single-purpose or keyway-specific cutting or duplicating machine shall not be allowed.

D. The key design and tolerances shall permit the use of keys and cylinders in existing key systems having similar keyways and sections.

E. Provide 6 masterkeys for each masterkey set. Provide 2 change keys for each lock. Stamp keys "DO NOT DUPLICATE".

F. Key blanks shall only be shipped to end-user locations upon written documentation from authorized purchasing personnel and for specified number of keys only.

G. Submit proposed keying schedule to Architect. If requested, meet with Owner and Architect to review schedule.

H. Deliver all permanent key blanks and other security keys direct to Owner's representative from SARGENT Manufacturing via secure courier, return receipt requested. Failure to properly comply with these requirements may be cause to require replacement of all or any part of the cylinders and keys involved as deemed necessary at no additional cost to the Owner.

2.1 CYLINDERS, KEYS, AND KEYING - Interchangeable Core

A. Acceptable Manufacturer and Series (No Substitutions):

Manufacturer	Series
SARGENT	XC

B. Provide 7-pin small format interchangeable core (SFIC) cylinders.

C. Provide cylinders and keys protected from unauthorized manufacture and distribution by manufacturer's United States patents.

D. The key design and tolerances shall permit the cutting of keys with standard code or duplicating machines. The requirement for a single-purpose or keyway-specific cutting or duplicating machine shall not be allowed.

E. The key design and tolerances shall permit the use of keys and cylinders in existing key systems having similar keyways and sections.

F. Provide 6 masterkeys for each masterkey set. Provide 2 change keys for each lock. Provide 2 control keys for core removal. Stamp keys "DO NOT DUPLICATE".

G. Key blanks shall only be shipped to end-user locations upon written documentation from authorized purchasing personnel and for specified number of keys only.

H. Submit proposed keying schedule to Architect. If requested, meet with Owner and Architect to review schedule.

I. Deliver all permanent key blanks and other security keys direct to Owner's representative from SARGENT Manufacturing via secure courier, return receipt requested. Failure to properly comply with these requirements may be cause to require replacement of all or any part of the cylinders and keys involved as deemed necessary at no additional cost to the Owner.

How to Order

A prefix has been created to identify when a SARGENT product is to include the XC cylinder feature.

When ordering, use 11- as the prefix to indicate that the product requires the XC feature.
11-8226 LNL x 26D, 11-10G05 LL x 26D, etc.

If other prefixes are being used, be sure that the 11- prefix appears first,
11-73-7P-10G05, 11-21-8226 x 26D, etc.

ESSEX™
THE TOTAL OPENINGS PEOPLE

SARGENT Manufacturing Company • 100 Sargent Drive • P.O. Box 9725 • New Haven • CT 06536-0915
Phone: 800-727-5477 • Fax: 888-863-5054 • Web site: www.sargentlock.com
SARGENT of Canada • Phone: 905-940-2040 • Fax: 905-940-3242 • Web site: www.sargentcanada.ca

Founded in 1864, SARGENT® is a market leader in locksets, cylinders, door closers, exit devices, electro-mechanical products and access control systems for new construction, renovation and replacement applications. The company's customer base includes commercial construction, institutional and industrial markets.

The ASSA ABLOY Group is the world's leading manufacturer and supplier of locking solutions, dedicated to satisfying end-user needs for security, safety and convenience.

An ASSA ABLOY Group company

ASSA ABLOY