SARGENT®

Auxiliary Locks

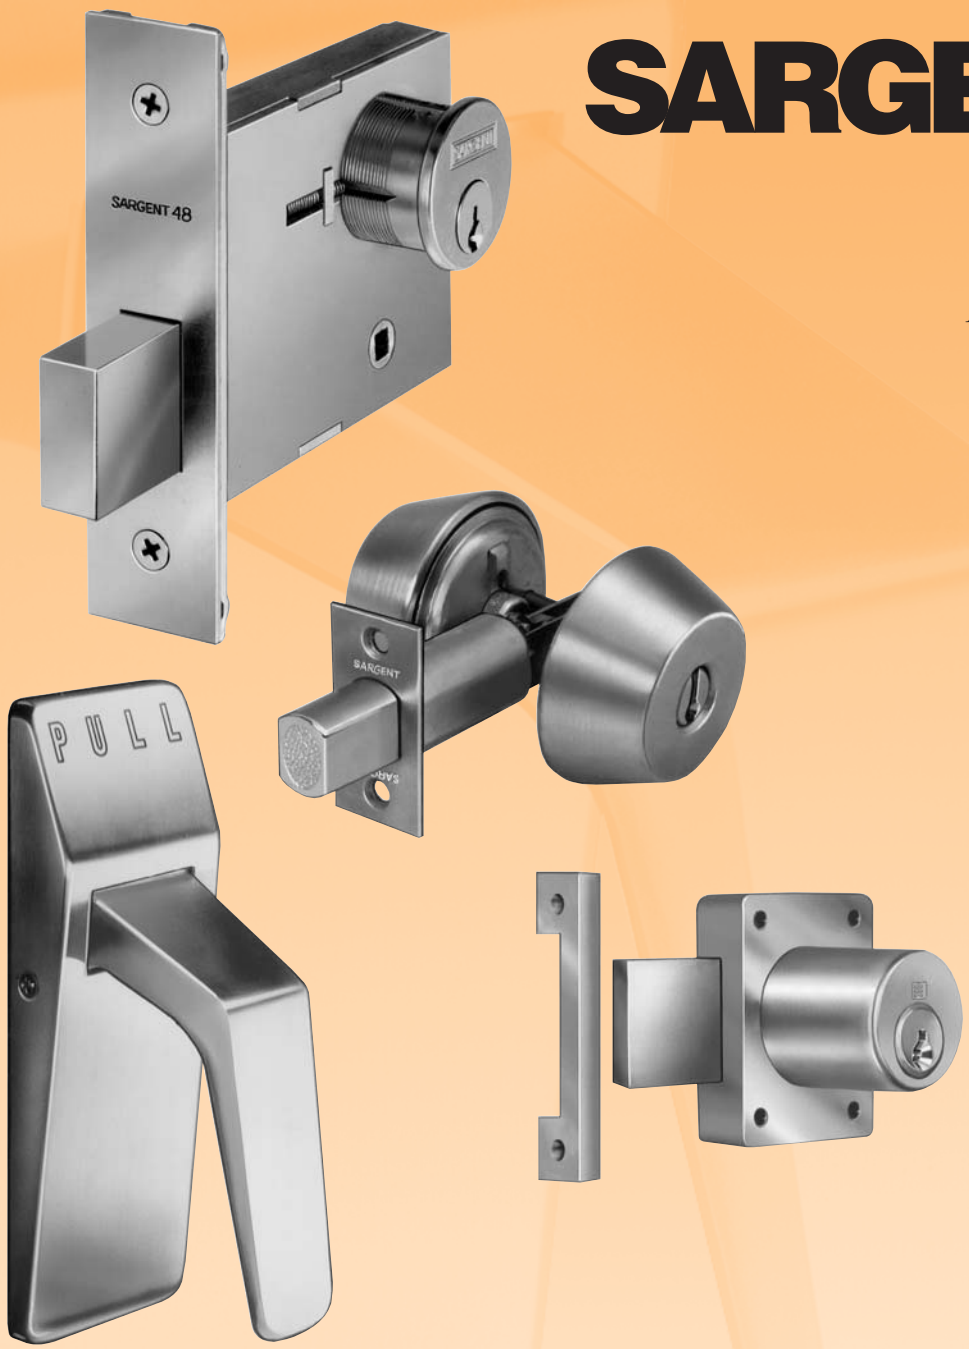

An ASSA ABLOY Group company

ASSA ABLOY

Auxiliary Locks

SARGENT
1-800-727-5477
www.sargentlock.com

Table of Contents

114/115 Hospital Latches For Push/Pull Doors 1
7800 Series Mortise Locks with Push/Pull Trim 2
8200 Series Deadbolt Mortise Locks 3
4870 Series Deadbolts 4
480 Series Deadbolts 5
470 Series Deadbolts 6
460 Series Deadbolts 7
Locker Locks 8
Utility, Cabinet and Switch Locks 9
Padlocks 10

SARGuard™ Patent Pending

SARGuard Coating

- Revolutionary finish coating available on all SARGENT product lines, utilizes a silver-based antimicrobial compound from AgION Technologies
- As an integral part of the finish coating, SARGuard lasts for the life of the hardware
- SARGuard coating permanently suppresses the growth of bacteria, algae, fungus, mold and mildew. It is effective against a broad spectrum of bacteria.
- Non-toxic and completely safe. The Agion antimicrobial compound is EPA and NSF approved and FDA listed for use in medical and food preparation equipment.
- Applications: Anywhere there is need for a clean environment (hospitals, laboratories, schools, medical centers, daycare, food processing etc.)

AgION

The AgION antimicrobial is not intended as a substitute for good hygiene. Coated products must still be cleaned to insure the surfaces will be free of destructive microbes. SARGENT makes no representations or warranties, express or implied, as to the efficacy of the AgION antimicrobial. A copy of the AgION warranty is available upon request.

Auxiliary Locks
114/115 Hospital Latches
For Push-Pull Doors

SARGENT
1-800-727-5477
www.sargentlock.com

Designed for convenience plus utility, the 114/115 hospital latches open with a gentle pull or slight push, making it ideal for hands free operation. The 114 push-pull latch with its profile makes it very easy to operate, while the 115 push-pull latch with its lower profile helps eliminate any obstruction while passing through an opening. Slim tapered paddles and smartly styled escutcheons possess all the elements of tasteful, yet functional design. The chassis design has versatility of surface or through-bolt mounting making this hospital latch the optimum construction for both durability and ease of install.

Specifications

For Doors	1-3/4" - 2-1/4"
Backset	5" standard. For 2-3/4" backset (specify as 24-115) and 7" backset (specify as 26-115) available on order
Strike	ANSI A115.2 strike. No 800 curved lip
Bolt	Brass, 1/2" throw, anti-friction nylon insert
Hand	Specify hand when ordering (Reversible except 74-)
114 Paddles	Cast; Projection from door 3-1/4" **Mounted down position ONLY**
115 Push Paddle	Cast; 1-5/8" x 4-1/2"; Projection from door 2-1/2" **Mounted up position ONLY**
115 Pull Paddle	Cast; 1-5/8" x 4-3/4"; Projection from door 2-15/16" **Mounted down position ONLY**
Escutcheons	Cold drawn; 2-1/2" x 6-7/8"
UL Listed	UL Listed for use on fire doors, UL-F804H See Underwriters Laboratories Building Materials List
Prefixes	24- 2-3/4" backset 26- 7" backset 28- 808 curved lip strike 74- Lead lined. Specify inside/outside escutcheon and latch x hand (Not field reversible) SG SARGuard – Antimicrobial clear powder coat
Suffixes	P Suffix designates Push/Pull to be stamp on each escutcheon TB Thru bolt pack, specify door thickness: 1-3/4", 2" & 2-1/4"
Finishes	3, 4, 9, 10, 10B, 15, 26, 26D For other finishes consult factory

114 Push-Pull

114 latches are mounted in the down position as shown and are available with ''PUSH'' and ''PULL'' lettered into the top of the escutcheon.

115 Push-Pull

115 latches are mounted with the "PUSH" in the up position and the "PULL" in the down position as shown and are available with "PUSH" and "PULL" lettered into the top of the escutcheon.

Chassis Mounted Unit Construction

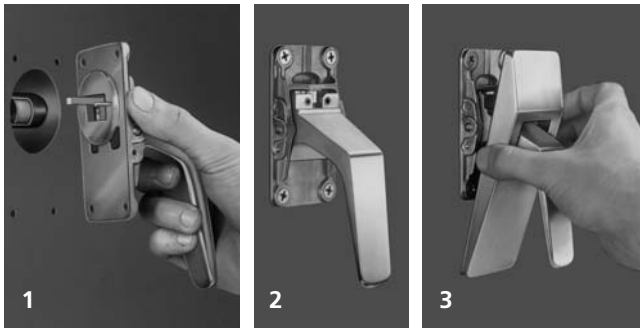

1. Chassis unit installs easily into door preparation.
2. Chassis is surface applied to door with (4) mounting screws.
3. Escutcheon slips over lever, attaches to chassis and installation is complete.

How To Order

Specify	Note	Example
Prefixes	SARGuard	SG-
Series	115	SG-115
Words Push/Pull	P	SG-115P
Suffixes	TB	SG-115P-TB
Finish	26D	SG-115P-TB x 26D
Hand	RH	SG-115P-TB x 26D x RH

Auxiliary Locks
7800 Series Mortise Locks with Push/Pull Trim – PT

SARGENT
1-800-727-5477
www.sargentlock.com

7800 Push/Pull Trim – PT

The Push/Pull design known for its ease of operation is coupled with the strength and integrity of a mortise lock to provide greater versatility. The trim, commonly used in hospitals and health care facilities, can now service conference rooms, handicapped restrooms, laboratories and pharmaceutical facilities that require more durability and security features than a cylindrical lock can provide.



- Spindle centered in escutcheon

7837 PT
Horizontal Mount Shown

How To Order

Specify	Note	Example
Prefixes	Keso F1	F1-82-
Series & Function	7837	F1-82-7837
Trim	PT	F1-82-7837 PT
Finish	32D	F1-82-7837 PT x 32D
Hand	RH	F1-82-7837 PT x 32D x RH

Note: For available prefixes, see listing on page 3

Features

- Paddle trim orientation can be mounted as a standard product in vertical (up or down) and horizontal positions
- Down or horizontal paddle orientation is required for cylinder side of door and if thumb turn is used
- Easy installation
- Handing is easily field reversible
- Through-bolted trim for stability
- 6 Lobe security type screws (Torx®) standard for PT trim only – Spanner Security screws optional as 37-prefix
- Engraving on paddle – consult factory
- Lead lining is available as option (Lockbody only)
- Covers are heavy wrought stainless steel, brass or bronze
- Paddles are cast stainless steel brass or bronze
- Finishes: 3, 4, 9, 10, 10B, 10BL, 20D, 32, 32D

Functions Available

04 Storeroom or Closet; Single Cylinder, Outside Paddle Rigid

15 Passage or Closet; Can not be locked

16 Exit or Public Restroom; Two Cylinder with Special Cam for I/S Cylinder

17 Asylum or Institutional; Rigid Paddles; Two Cylinders

24 Storeroom; Single Cylinder and Thumb Turn

26 Storeroom; Single Cylinder, Latchbolt and Deadbolt are independent of each other

37 Classroom; Single Cylinder

43 Apartment Corridor Door, Single Cylinder, Thumb Turn, Toggle and Deadbolt

45 Dormitory or Exit; Same as 43 without Deadlatch

50 Hotel Guest Single Cylinder, Toggle, Deadbolt Outside Paddle Rigid

65 Privacy Bedroom or Bath Thumb Turn & Emergency Release

Full Function Descriptions available in the 7800/8200 Mortise Lock Catalog. All other functions available as specials, except trim one-side on

Specifications

For Doors	Door thickness 1-3/4" (44mm) standard (For thicker doors, consult factory)
Backset	2-3/4" (70mm) only
Case	12 gauge heavy duty wrought steel, zinc dichromate plated. Thickness 7/64" (3mm) (.109")
Outside Front Plate	Brass, bronze or stainless steel. 8" (203mm) x 1-1/4" (31mm), ANSI Standard A115.1. Adjustable at any angle from flat to beveled 1/8" (3mm) in 2" (51mm)
Springs	High carbon steel
Latchbolt	Stainless steel 3/4" (19mm) projection one-piece, anti-friction reversible latch
Auxiliary Deadlatch	Stainless steel, non-handed
Deadbolt	One-piece hardened stainless steel, with 1" (25mm) projection
Hand	Specify hand on order; easily field reversible (if no hand is specified RH will be provided)
Strike	Brass, bronze or stainless steel; ANSI Standard A115.1; curved lip, non-handed (strike box optional)
Keys	Two, nickel silver (control key or emergency key must be ordered when required)
Masterkeying	Can be masterkeyed or grand masterkeyed. Construction keying available
Stile	5" minimum stile for 7800 Push/Pull Trim
Door Prep	ANSI A115.1 modified per template (see template for 7800/8200 lockbody & trim)
Warranty	10 year limited warranty. Warranty limited to replacement of Lockbody and/or components.

Certification Compliance

ANSI/BHMA	Meets ANSI/BHMA A156.13 Series 1000 Operational Grade 1 and Security Grade 1. Meets or exceeds ASTM F1577-95b paragraph 6.2 detention impact level 1 for deadbolt functions, level 3 for latchbolt only functions. **Note: Removable Core and SFIC Cylinders do not meet Security Grade 1 requirements.**
ADA	Meets A117.1 Accessibility Code. Meets BOMA International 4.13.8 Complies with American Disability Act; Consult local authorities
UL	UL and UL Listed to Canadian safety standards for A label (3 hour fire door) and lesser class doors, stamped letter F and UL symbol on armored front indicate listing
Positive Pressure	Meets positive pressure requirements UL 10C and UBC 7-2 (1997)

Auxiliary Locks
8200 Series Deadbolts

SARGENT
1-800-727-5477
www.sargentlock.com

Specifications

For Doors	Door thickness 1-3/4" (44mm) standard (For thicker doors, consult factory)
Backset	2-3/4" only
Strike	Universal, ANSI Standard A115.1. Available finishes 03, 04, 09, 10, 10BL, 15, 20D, 32, 32D Strike box standard
Deadbolt	One piece hardened stainless steel deadbolt with 1" throw
Cylinder	Brass, 6-pin. 2 keys per lock. Also available with the SARGENT Signature and Keso and Keso F1 security systems
Masterkeying	Can be masterkeyed. Construction key systems available
Case	12 gauge heavy duty wrought steel, zinc dichromate plated
Armored Front	Brass, bronze and stainless steel. 8" x 1-1/4", ANSI Standard 115.1. Adjustable at any angle from flat to beveled 1/8" in 2"
Hand	Non-handed
Prefixes for 8200 Series Deadbolts & 7800 PT Mortise Locks	10- Signature 10UL- Signature systems meeting UL437 11-XC key system (Not available with 7800 PT) 21- Construction key system 22- Construction key 23- Flat ANSI Strike 36- 6 Lobe Torx Security Screws (Standard on PT Trim) 37- Spanner head security screws 60- Disposable construction core 63- Removable core 64- Construction removable core 65-73- Small format interchangeable cores – 6-pin uncombinated 65-73 - Small format interchangeable cores – 7-pin uncombinated 70- Small format interchangeable core plastic disposable core provided 72- Small format interchangeable core with construction core provided 73- Small format 6-pin interchangeable core SARGENT 4A, 4B keyway only 73-7P- Small format 7-pin interchangeable core SARGENT 4A, 4B keyway only 74- Lock case wrapped in lead (specify hand) 82- Keso security cylinder F1-82- Keso security cylinder with front profile 83- Removable core Keso F1-83- Removable core Keso with front profile 84- Removable construction core Keso SC/ SE- Furnished in Schlage C or E keyway (1-1/8" cylinder only) SG-SARGuard - An antimicrobial clear powder coat available as a special VA - SARGENT V-10 standard cylinder VC - SARGENT V-10 interchangeable core VS - SARGENT V-10 cylinder unassembled VCVS - SARGENT V-10 interchangeable core cylinder unassembled
Finishes	3, 4, 9, 10, 10B, 10BL, 15, 20D, 26, 26D, 32, 32D For other finishes consult factory

8200 Deadlock



78-0034 Strike Standard



82-0229 Strike Flat Lip Alternative (23- Prefix)



82-0109 Strike Curved Lip Alternative



How To Order

Specify	Note	Example
Prefixes	XC-	XC-
Series & Function	8223	XC-8223
Finish	26	XC-8223 x 26

Functions

03 Classroom



- Key outside operates deadbolt
- Turn lever inside retracts deadbolt, but will not project it

20 Deadlock

***



- Key outside operates deadbolt
- No inside operation
- ANSI F18

21 Deadlock



- Key outside operates deadbolt
- Turn lever inside operates deadbolt
- ANSI F17

22 Deadlock

***



- Key from either side operates deadbolt
- ANSI F16

23 Classroom



- Key from either side operates deadbolt
- Turn lever inside will retract deadbolt, but will not project it

***** For use only on rooms with more than one exit**
Note: For deadbolt function locks with levers see the 8200 Mortise Lock Catalog

Auxiliary Locks
4870 Series Deadbolts

SARGENT
1-800-727-5477
www.sargentlock.com

Specifications

For Doors	Door thickness 1-3/4" (44mm) standard (For thicker doors, consult factory)
Backset	2-3/4" only
Strike	No. 480, 3-1/2" x 1-1/8" with strike box. Available finishes 03, 04, 09, 10, 10B, 15, 32, 32D
Bolt	One piece hardened stainless steel deadbolt with 1" throw
Cylinder	Brass 6-pin. 2 keys per lock
Cylinder Ring	No. 97 furnished standard, 1KB rosette available on order
Case	Heavy wrought steel, .093 thick, protected with a zinc dichromate finish
Armored Front	Brass, bronze, stainless steel. 4-5/8" x 1-1/8" Adjustable for flat or beveled doors (bevel adjustment 1/8" in 2")
Hand	Non handed, completely reversible (except for 74-)
Thumb Turn	No. 130W furnished standard
UL/cUL Listed	Listed for use on fire doors
Prefixes	10- Signature 10UL- Signature systems meeting UL437 (Security Grade 1) 11- XC key system (Not available with 7800PT) 21- Construction key system 22- Construction key 28- 7710 strike 4-7/8" x 1-1/4" ANSI A115-1 36- Torx security screws 37- Spanner head security screws 60- Disposable construction core 63- Removable core 64- Construction removable core 65-73- Small format interchangeable cores – 6-pin uncombinated 65-73 - Small format interchangeable cores – 7-pin uncombinated 70- Small format interchangeable core plastic disposable core provided 72- Small format interchangeable core with construction core provided 73- Small format 6-pin interchangeable core SARGENT 4A, 4B keyway only 73-7P- Small format 7-pin interchangeable core SARGENT 4A, 4B keyway only 74- Lock case wrapped in lead (specify hand) F1-82- Keso security cylinder with Front Profile 82- Keso security cylinder F1-83- Removable core Keso with Front Profile 83- Removable core Keso 84- Removable construction core Keso SC/ SE- Furnished in Schlage C or E keyway (1-1/8" cylinder only) VA - SARGENT V-10 standard cylinder VC - SARGENT V-10 interchangeable core VS - SARGENT V-10 cylinder unassembled VCVS - SARGENT V-10 interchangeable core cylinder unassembled
Finishes	03, 04, 09, 10, 10B, 10BL, 20D, 26, 26D, 32, 32D For other finishes consult factory

480 Strike



ANSI A115.5
Standard

4870 Series Deadlock



7710 Strike



7730 Strike



How To Order

Specify	Note	Example
Prefixes	10-	10-
Series & Function	4875	10-4875
Finish	04	10-4875 x 04

Functions

4874 Deadlock

***



- Key from either side operates deadbolt

4875 Deadlock



- Key outside operates deadbolt
- Turn lever inside operates deadbolt

4876 Deadlock

***



- Key outside operates deadbolt
- No inside operation

4877 Classroom



- Key outside operates deadbolt
- Turn lever inside retracts deadbolt, but will not project it

4878 Public Toilet



- Key from either side operates deadbolt
- Turn lever inside retracts deadbolt, but will not project it

4879 Exit Lock



- Turn lever inside operates deadbolt
- No outside operation

***** For use only on rooms with more than one exit**

Auxiliary Locks
480 Series Deadbolts

SARGENT
1-800-727-5477
www.sargentlock.com

Specifications

For Doors	1-3/8" (35mm) to 1-3/4" (44mm) thick standard For doors over 1-3/4" (44mm) consult factory (2-1/4" Thick door max)
Door Prep	Fits 161 (standard) cut outs and Fits 160 with 2-3/8" backset with 1" front and for 1-3/8" thick door
Backsets	2-3/4" (70mm) standard. 2-3/8" (60mm) available (20 prefix)
Strike	Wrought brass, bronze or stainless steel
Bolt	Solid steel with hardened steel pin insert and nickel silver plating 7/8" (22mm) x 5/8" (16mm) x 1" (25mm) throw
Cylinder	Brass, 6-pin. 2 nickel silver keys
Masterkeying	Can be masterkeyed. Construction key system available
Specification	Meets ANSI A156.5 Grade 1 requirements with 408 or 488 strike
Front	Wrought brass, bronze or stainless steel 2-1/4" (57mm) x 1-1/8" (29mm) with fixed bevel 1/8" (3mm) in 2" (51mm) furnished standard
Hand	Non handed, field reversible
Turn Lever	Non-ferrous
Housing	Non-ferrous, reinforced, one piece 2-1/2" (64mm) dia.60, 63, 64 prefix housing-brass and zinc, two piece. Concealed screws on double cylinder function
UL/cUL Listed	UL listed to U.S. and Canadian safety standards
Positive Pressure	Conforms to standards UL 10C and UBC 7-2 (1997)
Prefixes	10- Signature key system 11- XC key system 16- 400 "T" shaped strike with strike box 20- 2-3/8" (60mm) backset. 2-3/4" (70mm) x 1" (25mm) wide front 21- SARGENT Construction key system (lost ball) standard on all new systems 22- SARGENT Construction key system (split key). For pre-established split key systems only 28- 408 Flat lip strike ANSI A115.2 48- 488 Reinforced strike with 4 mounting screws and strike box 60- SARGENT Removable core cylinders. Plastic disposable core provided 63- SARGENT Removable core cylinder 64- SARGENT Removable construction core cylinder 65-73- Small format interchangeable cores - 6-pin uncombinated 65-73-7P- Small format interchangeable cores - 7-pin uncombinated 70- Small format interchangeable core. Plastic disposable core provided 72- Small format interchangeable core with construction core provided 73- Small format 6-pin interchangeable core, SARGENT 4A, 4B keyway only — for new systems 73-7P- Small format 7-pin interchangeable core SARGENT 4A, 4B keyway only — for new systems SC/SE- Schlage C or E keyway (specify)
Finishes	3, 4, 10, 10B, 26, 26D For other finishes consult factory

480 Series Deadbolt

Inside Turn Lever

404 Standard Strike

- Standard



400 T-Shaped Strike

- 16 Prefix



488 Reinforced Strike

- 48 Prefix



408 Flat Lip Strike

- 28 Prefix



Packaging — 480 Series

Approximate Shipping Weights	
2 lbs.(.9 kg)/Box	10 Boxes/Case

How To Order

Specify	Note	Example
Prefixes	28-	28-
Series & Function	485	28-485
Finish	10	28-485 x 10

Functions

484 Deadlock



- Key from either side operates deadbolt
- Use only on rooms with more than one exit
- **ANSI EO141**

485 Deadlock



- Key outside operates deadbolt
- Turn lever inside operates deadbolt
- **ANSI EO151**

486 Deadlock



- Key outside operates deadbolt
- Blank plate by exposed screws inside. Minimum 1" (25mm) required between doors
- **ANSI E0161**

487 Deadlock



- Key outside operates deadbolt
- Turn lever Inside retracts deadbolt, but will not project the deadbolt
- **ANSI E0161**

489 Deadlock

- Turn lever inside operates deadbolt
- Blank outside plate

Auxiliary Locks
470 Series Deadbolts

SARGENT
1-800-727-5477
www.sargentlock.com

Specifications

For Doors	1-3/4" (44mm) to 2-3/8" (61mm) door thickness [except 475 with 2-1/16" (53mm) maximum thickness.] (1-3/8" door optional as 1-Prefix)
Door Prep	1-1/2" dia. (38mm) hole standard for all functions 2-1/8" dia. (54mm) hole (161 prep) for 474 and 475 only with adapter ring provided
Backsets	2-3/8" (61mm) or 2-3/4" (70mm) adjustable backset
Strike	406 Strike standard. Alternates available
Bolt	Brass with hardened steel pin 5/8" (16mm) x 13/16" (21mm) x 1" (25mm) throw
Cylinder	Brass, 6-pin cylinder
Masterkeying	Can be masterkeyed. Construction key system available
Specification	Grade 2 ANSI 156.5 1000 series
Front	Stamped brass 2-1/4" (57mm) x 1" (25mm) wide with filler for 1-1/8" (29mm) wide
Hand	Universal – non handed
Prefixes	1- 1-3/8" (35mm) thick door adapter 10- Signature key system 11- XC key system 13- Front & strike with 1/4" (6mm) radius corners 15- Drive-in adjustable backset bolt x 26D only (Not Grade 2) 21- Construction key system (Lost Ball) 28- 408 Flat lip strike, 4-7/8" (124mm) x 1-1/4" (32mm). ANSI A115.2 SC- Deadbolt furnished in Schlage C keyway, 0 Bitted SE- Deadbolt furnished in Schlage E keyway, 0 Bitted
Finishes	3, 4, 10, 10B, 26, 26D

470 Series Deadbolt

Inside
Turn Lever
ADA Compliant



Strikes

406 Strike
Standard



407 Radius Strike
13 Prefix –
Includes Radius Front



408 Flat Lip Strike
28 Prefix



Packaging — 470 Series

Approximate Shipping Weights	
2 lbs./Box	10 Boxes/Case

How To Order

Specify	Note	Example
Prefixes	10-	10-
Series & Function	479	10-479
Finish	04	10-479 x 04

Functions

474 Deadbolt



- Key from either side operates deadbolt
- Use only on rooms with more than one exit

475 Deadbolt



- Key outside operates deadbolt
- Turn lever inside operates deadbolt

479 Deadbolt

- Turn lever inside operates deadbolt
- **Inside mounting only**

Auxiliary Locks
460 Series Deadbolts

SARGENT
1-800-727-5477
www.sargentlock.com

Specifications

For Doors	1-3/8" (35mm) to 1-3/4" (44mm) thick only
Backsets	2-3/4" (70mm) standard fits 161 cutout 2-3/8" (60mm) available fits 160 cutout
Strike	Brass and stainless steel 2-3/4" (70mm) x 1-1/8" (29mm) with strike box
Bolt	Solid brass 5/8" (16mm) x 13/16" x 1" (25mm) throw Hardened steel pin
Cylinder	Brass, 6-pin. 2 keys per lock
Cylinder Housing	Steel reinforced. Plated
Masterkeying	Can be masterkeyed. Construction key system available
Case	15/16" steel
Hand	Universal – non handed
Front	Brass and stainless steel 2-1/4" (57mm) x 1-1/8" (29mm) wide with filler
Turn Lever	Non ferrous
Prefixes	10- Signature 11- XC key system 20- 2-3/8" (60mm) backset - 2-1/4" (57mm) x 1" (25mm) wide front 21- Construction key system 22- Construction key
Finishes	**32D ONLY**

Note: Designed to meet ANSI/BHMA Grade 2

460 Series Deadbolt

405 Strike

Standard



Packaging — 460 Series

Approximate Shipping Weights	
2 lbs./Box	10 Boxes/Case

How To Order

Specify	Note	Example
Prefixes	22-	22-
Series & Function	464	22-464
Finish	32D	22-464 x 32D

Functions

464 Deadbolt



- Key from either side will operate the deadbolt
- Use only on rooms with more than one exit

465 Deadbolt



- Key outside operates deadbolt
- Turn lever inside operates deadbolt

Specifications: Series 1654

For Doors	1" 5 pin only, 1-1/4" and 1-1/2" thick. Can be used on thin doors such as doors 7/8", 1-1/8" and 1-3/8" thick with 1/8" projection
For Stiles	1-1/2" wide minimum
Strike	Non ferrous alloy, universal
Bolt	Steel, 15/16" projection
Cylinder	Brass, 5-or 6-pin. 2 keys per lock
Cylinder Shell	Brass or bronze
Case	Non ferrous alloy
Hand	Reversible
Finishes	3, 26, 26D



1654
Shown



1654MKD - Can be masterkeyed (MKD) and grand masterkeyed in any 6-pin system.

Available with 21 lost ball construction feature

***Note: Systems using 6-pin cylinders are for doors from 1-1/8" to 1-1/2" thick only. Key No. 6277, 5-pin available for 1" thick doors only.**

How To Order

Specify	Note	Example
Keying	10-	10-
Product	1654	10-1654
Door Thickness	1-1/8"	10-1654 x 1-1/8"
Finish	26D	10-1654 x 1-1/8" x 26D

Specifications: Keso F1 & Keso Locker Locks

For Doors	1-1/8" and 1-3/8" thick. Can be used for doors 7/8", 1" and 1-1/4" thick with slight projection
For Stiles	1-1/2" wide and over
Strike	Non ferrous alloy, universal
Bolt	Steel, 15/16" projection
Cylinder	Keso F1- and Keso security system. Can be masterkeyed with all other Keso locks in the system
Cylinder Shell	Brass or bronze
Case	Non ferrous alloy
Hand	Reversible
Finishes	3, 26, 26D

82-1654
Shown

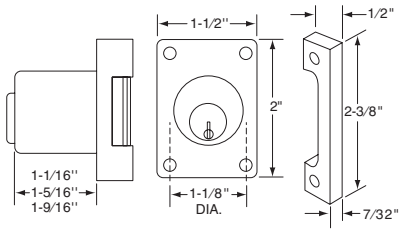

How To Order

Specify	Note	Example
Keying	F1-82-	F1-82-
Product	1654	F1-82-1654
Door Thickness	1-3/8"	F1-82-1654 x 1-3/8"
Finish	26D	F1-82-1654 x 1-3/8" x 26D

Auxiliary Locks
Utility, Cabinet and Switch Locks

SARGENT
1-800-727-5477
www.sargentlock.com

Specifications: 4142-4143 Utility & Cabinet Lock

For Metal Doors	Up to 7/8" thick
Cylinder	Brass, 6-pin, can be master keyed with other SARGENT locks
Cam	Bronze, 4142 horizontal in locked position (attached with 2 screws)
Keys	Two 6-pin provided
Hand	Specify hand when ordering 4142
Reversible	4142 Horizontal in Locked Position (Cam Rotated) 4143 Vertical in locked position
Finishes	3, 4, 10, 10B, 26, 26D, 32, 32D

Specifications: 4152 Utility Lock for Draws

For Drawers	Up to 3/4" thick
Cam	Flat Steel Can (order as 4152) 1/4" Offset Steel Cam (order as 4152-2)
Cylinder	Keso security system. Can be masterkeyed with all other Keso locks in the system.
Mounting Plate	Furnished with screws for mounting to wood or metal drawers. Can be brazed to metal doors
Reversible	Right or left hand
Finishes	3, 4, 10, 26, 26D

4142
Right Hand Shown



4152-2
Shown



How To Order

- Example: 4142 x US26

Switch Locks

4153

- Keso F1 & Keso security system cylinder
- Adjustable from 1-3/4" to 2-3/4"
- Operates UL Listed switch
- SPDT maintained
- Finish: US26
- Switch rating: 250VAC, 5 amp. 30VDC, 3 amp





4253

- Listed in U.L. Burglary Protection Equipment
- Keso F1 & Keso security system cylinder
- Operates UL Listed switch
- SPDT maintained
- List under connector and switches (25L30)
- Drill and pick resistant
- Finish: 26
- Switch rating: 250VAC, 5 amp. 30VDC, 3 amp

How To Order

- Example: 4153 x 26

SARGENT
1-800-727-5477
www.sargentlock.com

758 Padlock Features

- Cylinder easily removed while in the unlocked position for rekeying
- Available with SARGENT keyways, allowing for use into master keyed systems
- 6-pin cylinder standard
- Shackle locked by dual ball bearings
- Higher security key capture feature standard
- Available in the following single key sections S,R,U,CR,DL and the following keyway families L,R,H,C,A,B,K,N,V
- Key removable in locked position only or when shackle is rotated 180º, key is then required to relock padlock

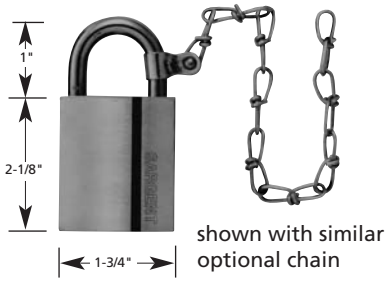

shown with similar optional chain

758-C Shown

Specifications - 758

Shackle Heights	1"– Standard, 2"(-2 suffix), and 4" (-4 suffix) all 5/16" diameter
Shackle Material	Hardened steel - optional (-HS suffix) Stainless steel shackle standard
Cylinder	Utilizes standard 10 Line with padlock tail piece, keyed different as standard
Case Finish	Brass only. Solid one piece construction
Keys	Two keys provided as standard
6013K Weather Shield Kit	Helps prevent freezing in winter and keeps water debris from entering lock case. Can be used on all padlocks having an 11/32" shackle. Kit increases shackle diameter to 1/2". Field installed.
Chain	Chain 9" long (-C suffix)

Prefixes Available for 758:

10- Signature cylinder
10- 21- Signature cylinder-lost ball construction
10-63- Signature cylinder keyed removable core
11- XC key system
21- Construction keying-lost ball
22- Construction key (half key)
51- Old style removable core
52- Old style removable core construction
60- Plastic construction core
63- Keyed removable core
64- Construction removable core
SC/SE- Furnished in Schlage C or E keyway O bitted with 2 key blanks

How To Order

Specify	Note	Example
Keying	10-	10-
Product	758	10-758
Suffixes	-2-HS	10-758-2-HS

856 and 857 Keso F1 & Keso Padlocks

- Available with Keso F1- and Keso; specify F1-82- for Keso F1- specify 82 for std Keso
- Same cylinder security as offered in other Keso Security System locks. Can be masterkeyed with all locks in the system
- Positive deadlocking construction - no springs which can be forced
- Two stainless steel balls lock shackle. Forcing of shackle increases locking action
- Key removable in locked position only (82-857)
- Key capture - not available for 82-856



82-856 Shown

Specifications: F1-82-856 and F1-82-857

856	Nickel plated brass shackle
856C	Nickel plated brass shackle and 9" nickel plated brass chain
856HS	Nickel plated hardened steel shackle
856HSC	Nickel plated hardened steel shackle and 9" nickel plated brass chain
857	Key removable in locked position only
Case	Brass
Case Finishes	Satin brass standard. Dull chrome (26D) on order
Case Dimensions	2" x 2" x 1-1/8"
Shackle	Brass or hardened steel, nickel plated
Shackle Diameter	11/32"
Shackle Clearance	1" standard. 2-1/2" and 4" clearance on order
Chain and Clevis	Chain 9" long (-C suffix)
6013 Weather Shield Kit	Helps prevent freezing in winter and keeps water debris from entering lock case. Can be used on all padlocks having an 11/32" shackle. Kit increases shackle diameter to 1/2". Field installed.

How To Order

Specify	Note	Example
Keying	F1-82-	F1-82-
Product	856	F1-82-856
Suffixes	HS	F1-82-856-HS

SARGENT Manufacturing Company • 100 Sargent Drive • P.O. Box 9725 • New Haven • CT 06536-0915
Phone: 800-727-5477 • Fax: 888-863-5054 • Web site: www.sargentlock.com
SARGENT of Canada • Phone: 905-940-2040 • Fax: 905-940-3242 • Web site: www.sargentcanada.ca

Founded in 1864, SARGENT® is a market leader in locksets, cylinders, door closers, exit devices, electro-mechanical products and access control systems for new construction, renovation and replacement applications. The company's customer base includes commercial construction, institutional and industrial markets.

The ASSA ABLOY Group is the world's leading manufacturer and supplier of locking solutions, dedicated to satisfying end-user needs for security, safety and convenience.

© SARGENT Manufacturing Company 2005