Cylinders, Keys, and Keying Systems

FALCON
Locks & Security Products

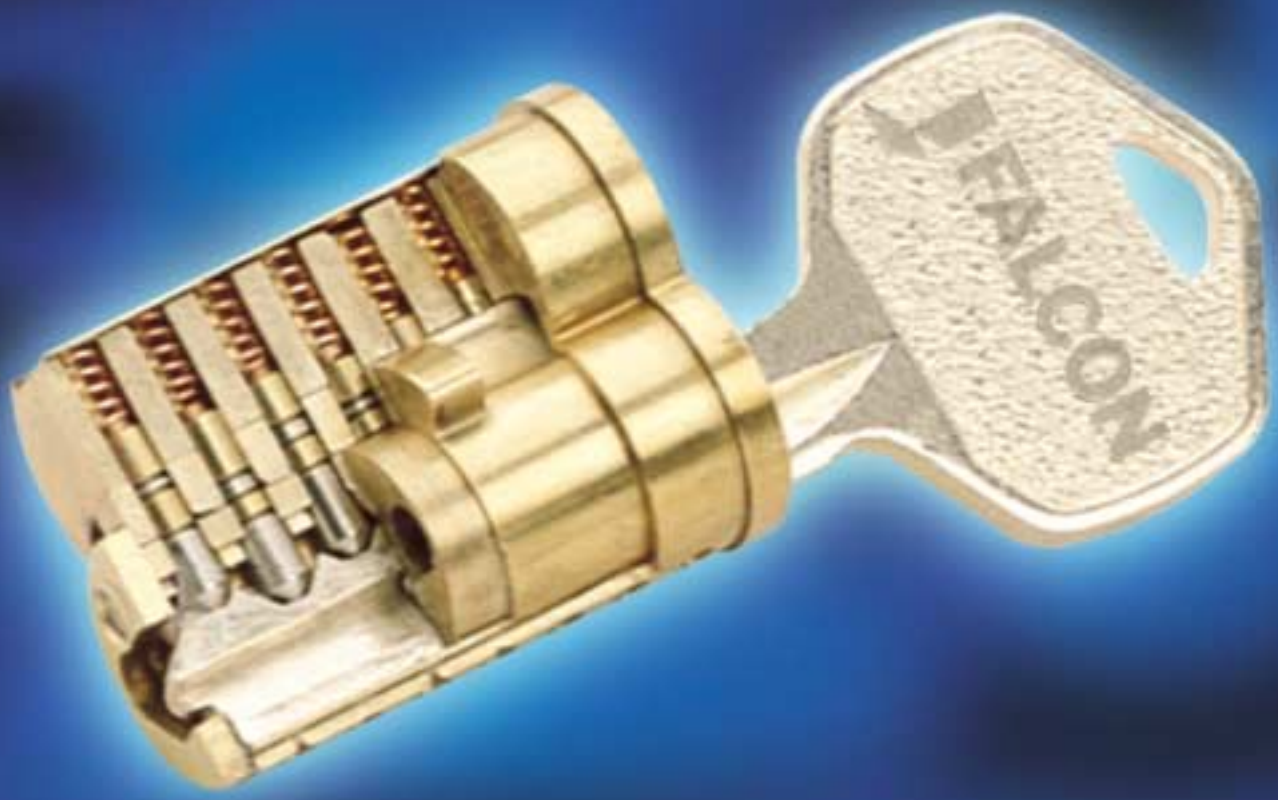

FALCON
Locks & Security Products

Falcon Lock Philosophy

"Quality locksets delivered on time" is the Falcon Lock creed. Whether you're ordering Falcon Locks for a retrofit application or specifying Falcon Lock for a major construction project, you're guaranteed personal attention through reliable, dependable service. No hassles. No hold-ups. Our top-quality locksets are delivered to specifically meet your schedule and your budget.

Falcon Lock is a member of the IR Security & Safety family, a world-wide division of Ingersoll-Rand Company.

INDEX

General Information	**2**
Credentials	**2**
ANSI/BHMA	**2**
Keying Systems	**3-7**
Key and Cylinder Markings	**3**
How to Specify	**4-6**
Keyways and Construction Keying	**7**
Standard Cylinders	**8**
Conventional and Auxiliary	**8**
Competitor Keyways	**9-12**
Keyblanks & Keys	**13**
Tailpieces	**14**
Accessories	**15**
Interchangeable Core	**16**
Overview	**16-17**
Key Blanks and Keys	**18**
Tailpieces	**19**
Accessories	**20**
Mortise Cylinders	**21**
Mortise Rim and Cam Lock	**21-22**
Cams	**23-25**
Collars	**26**
Tailpieces	**27**
Accessories	**27**

General

For over 30 years, Falcon Lock has been manufacturing reliable lock hardware. Our reputation and commitment to providing a high quality product at a reasonable price, with timely delivery, has been rewriting the standard in our industry. Falcon has one of the most extensive lines available on the market today — with a choice of functions and applications to meet and outreach the most demanding requirements.

Falcon locks feature the ultimate convenience and flexibility of an interchangeable core. Whenever a key is lost or stolen, locks can be re-keyed quickly by removing the core and installing a new one—avoiding locksmith services. Our interchangeable cores are also compatible with other small format interchangeable core products.

We continue to keep a pulse on our market by working closely with various agencies and organizations, such as ANSI/BHMA, who are responsible for the writing of specifications and standards. This allows us to improve and meet the needs of a changing market with reliable and flexible locks, delivered on time, exactly when you need them.

We are members of:

All information and specifications contained in this catalog are subject to change. Please consult our current price list or the factory for comprehensive and current product information.

BHMA: Builders Hardware Manufacturers Association.

ANSI: American National Standards Institute, Inc.

BHMA CERTIFIED

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

Keying Systems

Key and Cylinder Marking

With these options, keys and/or cylinders are stamped with the key symbol (code). This tells how the cylinder is keyed, eliminating trial and error. Lock mix-ups during installation or key mix-ups afterward are less likely to happen—and easier to straighten out if they do.

For example, the symbol **AA1** shown in the illustration identifies the lock to be operated by grand master key **A**, master key **AA** and change key **AA1**. Upon written authorization from the building owner to an authorized Falcon distributor, a bitting list can be furnished for each job to translate the symbols into key bittings. If a key is lost, a replacement key can be ordered by number from the Falcon distributor.

Visual Key Control (VKC)

For Greater Convenience

The key symbol is stamped on the plug face or other visible portion of the front of the cylinder. This makes identification fast and convenient. The disadvantage is that stolen or lost keys can be easily matched to the locks they operate. Also restamping cylinders when they are rekeyed results in damage to the finish.







Concealed Key Control (CKC)

For Greater Security

For greater security. Specify CKC on the cylinders. The key symbol is stamped in a concealed location, such as the rear of the cylinder or the side of an interchangeable core. It is not visible to the general occupants of the building but can be accessed by authorized personnel upon removal of the cylinder or core.





FALCON
Locks & Security Products

Keying Systems

2- and 3-Level Master Keying Systems

To Specify a Simple Master Key System (2 Levels of Keying)

The master key symbol consists of TWO letters, such as **AA.** The change key numbers are added to the master key letters. The numbers come FIRST: **1AA, 2AA, 3AA,** etc.

When locks are required which are not operated by the master key or other change keys in the system, they are referred to as "single keyed" and given symbols **SKD1, SKD2,** etc.

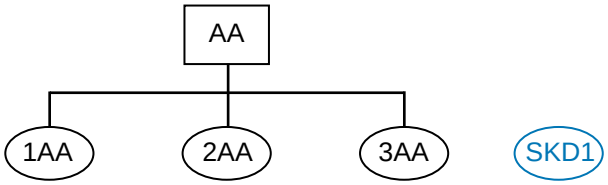

When all higher levels of master keys are to be disallowed, suffix **(NMK)** to the symbol of the key which is to operate. This means "not master keyed." Cylinder **1AA(NMK)** is operated by **1AA** only. The **AA** master is blocked from operation.

To Specify a Grand Master Key System (3 Levels of Keying).

The grand master is assigned any ONE letter, such as **A**. The master keys under this grand are assigned TWO letters, the first of which must be the same as the grand: **AA, AB, AC,** etc. are all masters under grand **A**. Masters **BA, BB, BC,** etc. are all under grand **B**. Caution: Do not use the letters **I** or **O** because of possible confusion with the numerals 1 and 0, respectively. Change key numbers come after the letters.

For master keys beyond **AZ,** insert a number between the letters to designate which pass through the alphabet they represent. **A2A** through **A2Z** represents the second pass of masters under grand **A**. **A3A** through **A3Z** would be the third. Change keys under these masters have the numbers suffixed in the usual way: **A2A1, AZA50**, etc.

If the cylinder is to be operated by its change key and nothing lower than the single lettered GMK, the change number is added to the GMK symbol. This is illustrated by the example **A1** in the schematic shown.

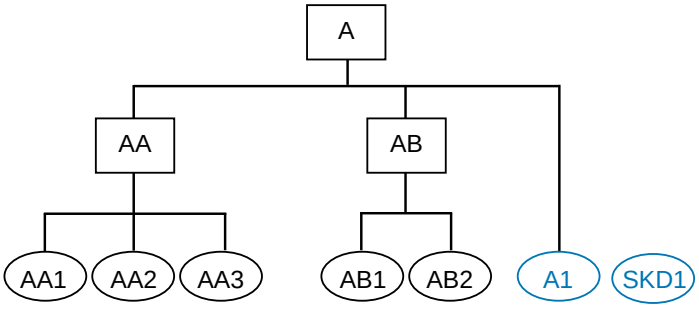

When locks are required which are not operated by ANY master keys or other change keys in the system, they are referred to as "single keyed" and given symbols **SKD1, SKD2,** etc.

When all higher levels of master keys are to be disallowed, suffix **(NMK)** to the symbol of the key which is to operate. This means "not master keyed" and can be applied to any level in the system Cylinder **AA1(NMK)** is operated by **AA1** only. The **AA** master and **A** grand are blocked from operation. Cylinder **AA(NMK)** would be operated by the **AA** master only. Grand **A** does not operate.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Keying Systems

4-Level Master Keying Systems

To Specify a Great Grand Master Key System (4 Levels of Keying)

The great grand master key is assigned the symbol **GGM**. The rest of the symbols are the same as those in 3-level systems: The GMKs are assigned single letters, e.g. **A, B, C, D,** etc.

Caution: Never use **X** for a grand master key due to the confusion which will result with cross keying symbols presented an the next page.

Masters under each GMK are assigned two letters, the first of which is the same as its respective grand master key. Change key numbers come after the letters. Changes under the grand (**A1, B1**, etc.) and masters beyond **AZ** are handled exactly as in the 3 level system already described.

Changes directly under a grand are also handled as illustrated in the 3-level system. For changes directly under the **GGM** with no intermediate level masters, the change number is added directly to **GGM** as shown by the example **GGM1** in the schematic.

When locks are required which are not operated by ANY master keys or other change keys in the system, they are referred to as "single keyed" and given symbols **SKD1, SKD2,** etc.

When all higher levels of master keys are to be disallowed, suffix **(NMK)** to the symbol of the key which is to operate. This means "not master keyed" and can be applied to any level in the system. Cylinder **AA1(NMK)** is operated by **AA1** only. The **AA** master, **A** grand and **GGM** are all blocked from operation. Cylinder **AA(NMK)** is operated by the **AA** master only. Grand **A** and the **GGM** do not operate. Cylinder **A(NMK)** would be operated by the A grand only, without the **GGM.**

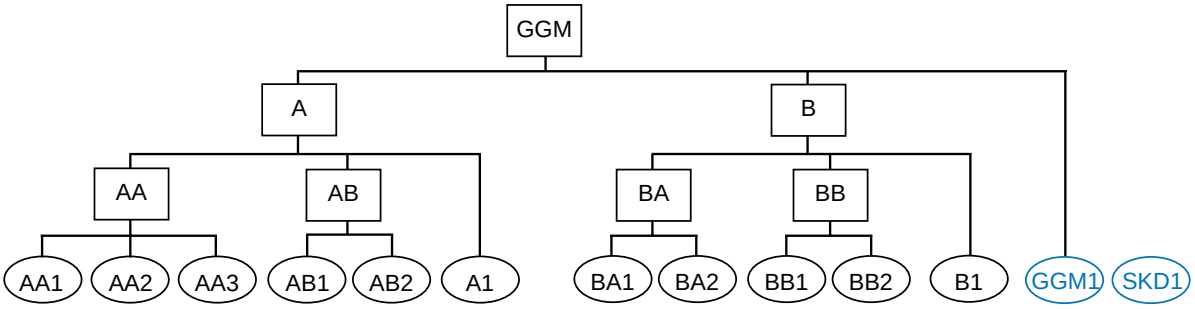

Selective Master Keys

It is often useful in large keying systems to issue a high level master key to maintenance personnel which allows access across all master and grand master key boundaries of a keying system. A selective master key is usually very close to the system's top master key, both physically and through its realm of access. Nevertheless, it must be blocked from operating in many areas.

To designate that a lock be operated by a selective master key, suffix the symbol in parentheses to the standard symbol. Example: **AA1 (ENG).** This must be added *every time* the selective key is to operate and left off whenever the selective key is NOT to operate. For instance, you may lay out a system in which key AA1 is to operate two different offices. Inside one of them is an electrical cabinet which must be accessible to maintenance personnel carrying the **ENG** key. That lock must be specified as **AA1(ENG)** while the lock for the other office must be specified as **AA1.** Change keys directly under the selective key, such as **ENG1**, are operated by all higher level keys, such as **GGM.**

Like cross keying, a selective master key is a convenience feature which decreases the security of the cylinders it operates and limits the expansion and flexibility of the overall keying system.

The most common names and symbols for selective master keys

ENG=Engineer's key
JAN=Janitor's key
GRD=Guard's key
ATT=Attendant's key
HKP=Housekeeper's key
MAIN=Maintenance key

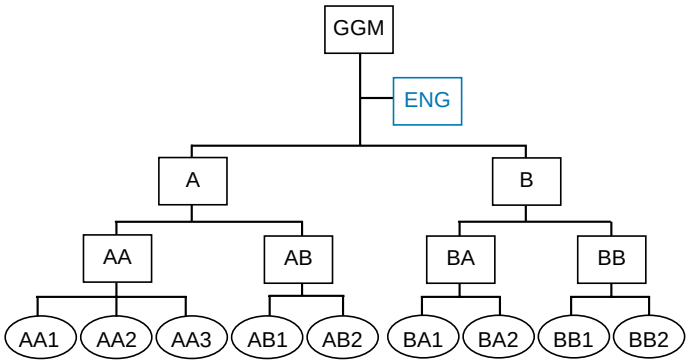

FALCON
Locks & Security Products

Keying Systems

Cross Keying

Convenience May Reduce Cylinder Security and Hinder System Expansion

Whenever two or more different keys such as **AA1** and **AA2** are both required to operate the same cylinder, the cylinders security is reduced. This is called *cross keying*. When the cross keying occurs under all the same higher level keys, such as **AAI** and **AA2**, it is known as controlled cross keying. When it combines keys under different higher level keys, such as **AAI** and **AB1**, it is known as uncontrolled cross keying.

In addition to reducing the security of the cylinder, cross keying usually imposes limits on the flexibility and expansion of the overall keying system. This is especially true of uncontrolled cross keying. For these reasons, it is strongly recommended to allow personnel to carry more than one key. Cross keying should be discouraged whenever possible. However. when cross keying is required, it is specified as follows, and should be summarized at the beginning of each order.

Case #1

Cylinder requires its own change key. The illustration depicts part of a small medical building where two doctors share a common reception area. The receptionist gets the **AA3** key. Each doctor carries a key which operates only one office, but is also cross keyed into the entrance from the corridor.

Determine the symbol of the change key (example: **AA3**). Then prefix the letter **X** (example: **XAA3**). Then list all keys which are to operate in an "operated by..." phrase. Example. "**XAA3** operated by **AAI,AAZ, AA** and **A**". Note that X is a cylinder specification only. The keys for cylinder **XAA3** are designated **AA3**.

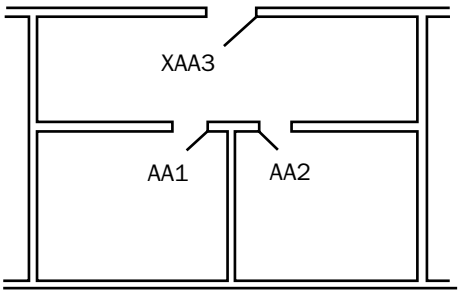

XAA3 Operated by AA1, AA2, AA and A

Case #2

A cylinder does NOT require its own change key. This illustration depicts a section of a floor in a dormitory. Each student's bedroom key operates the hall door lock. There is no need to construct a key which operates only the hall door.

In this case, place an **X** at both the beginning and end of the symbol and a number between them. Example: **XIX, XZX** etc. Again, always include the "operated by . . . phrase with a complete listing of key symbols to operate.

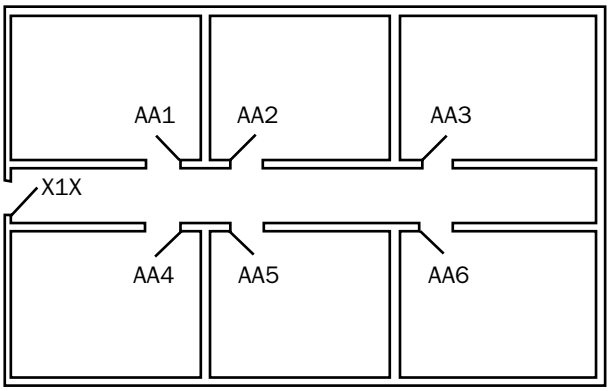

X1X Operated by AA1 through AA6, AA and A

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

Keying Systems

Keyways

"G" keyway is standard for all Falcon conventional (non-I/C) cylinders and Falcon "A" keyway is standard for all interchangeable cores and will be supplied unless otherwise specified.

The multiple keyway structure shown to the right is used to expand keying systems which require more than one keyway

Falcon bored locksets are also available with the most common competitors' keyways shown below. Falcon does not offer master keying of their keyways. D Series deadlocks are limited to "D1", "L4", "C", "E" and "GA" keyways.

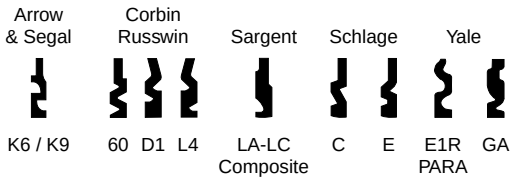

Falcon Multiplex Key Family

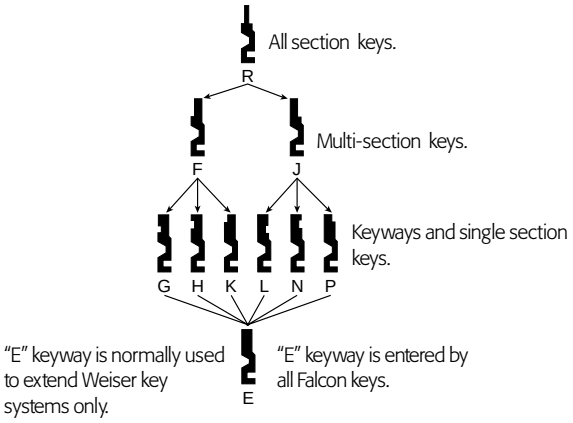

Construction Keying

Construction Master Keying

Construction master keying is an option for conventional (non-I/C) cylinders and locksets. Cylinders are prepared with a special construction pin at the factory so that the construction master key (CMK) operates all cylinders while the building is under construction.

When construction is complete, turn the top master key in each cylinder. This process moves the special construction pin into a pocket of the cylinder plug, thereby eliminating subsequent operation of the CMK.

To order, specify "(CMK)" after the line item.

Example: 72 each D441 626 1AA - 72AA (CMK)

Blockokey® System

Falcon's Blockokey® System is used for extensive master key systems using conventional (non-I/C) cylinders and locksets. Locks are shipped from the factory with a plastic "key block" in the back of every cylinder's keyway. A shorter 4-pin "Project Key" operates all cylinders while the building is under construction.

When construction is complete, use the special KB536 extractor key (removal tool) to remove the key block from each cylinder, thereby voiding operation of the Project Key.

To order, specify "Blockokey" after the line item.

Example: 72 each D441 6261AA- 72AA Blockokey.

Orders must include the name and address of the person to whom the construction keys and permanent master and change:keys should be sent.

SKD Security Caution

Unless otherwise specified, SKD sets will not be construction master keyed. Doing so significantly limits the system's expansion and decreases the security of the SKD locks.

When construction master keying is required for SKD sets, Falcon recommends issuing the SKDs on a different keyway with their own (separate) CMK. All orders which include SKD sets should specify how the construction keying should be handled.

FALCON Locks & Security Products

Standard Cylinders

Key-in-Knob and Lever Cylinders

Regular Function Knobs and Levers Lockset	Pins	Cylinder
B611	5-pin	A23151-06
B611	6-pin	A23155-00
B all other functions	5-pin	A23155-02
B all other functions	6-pin	A23165-02
F all functions	5-pin	A23155-00
F all functions	6-pin	A23165-00
S 561 - E and T designs	5-pin	A23151-01
S 561 - E and T designs	6-pin	A23161-01
S 561 - H designs	5-pin	A23151-02
S 561 - H designs	6-pin	A23161-02
S 501, 511, 521, 581 - E and T designs	5-pin	A23151-02
S 501, 511, 521, 581 - E and T designs	6-pin	A23161-02
S 501, 511, 521, 581 - H designs	5-pin	A23151-03
S 501, 511, 521, 581 - H designs	6-pin	A23161-03
T381 Inside	5-pin	A23151-06
T381 Inside	6-pin	A23161-06
T381 Inside	7-pin	A23171-06
T571	5-pin	A23151-07
T571	6-pin	A23161-07
T571	7-pin	A23171-07
T all other functions	5-pin	A23151-05
T all other functions	6-pin	A23161-05
T all other functions	7-pin	A23171-05
X 311, 561, 591 - E and T designs	5-pin	A23151-00
X 311, 561, 591 - E and T designs	6-pin	A23161-00
X 411, 501, 511, 521, 581-E and T designs	5-pin	A23152-00
X 411, 501, 511, 521, 581-E and T designs	6-pin	A23162-00
X 571-E and T designs	5-pin	A23151-02
X 571-E and T designs	6-pin	A23161-02
X 311, 591, - H designs	5-pin	A23151-01
X 311, 591, - H designs	6-pin	A23161-01
X 311, 591, - H designs	7-pin	A23171-01
X 411, 501, 511, 521, 581-H designs	5-pin	A23152-02
X 411, 501, 511, 521, 581-H designs	6-pin	A23162-02
X 411, 501, 511, 521, 581-H designs	7-pin	A23172-02
X 561-H designs	5-pin	A23151-02
X 561-H designs	6-pin	A23161-02
X561-H designs	7-pin	A23171-01
X 571-H designs	5-pin	A23151-03
X 571-H designs	6-pin	A23161-03
X 571-H designs	7-pin	A23171-02

Auxiliary Lock Cylinders

Deadlock Lazy Tailpieces Lockset	Pins	Cylinder
D411, 421, 811, 821	5-pin	A14889-03
D411, 421, 811, 821	6-pin	A14921-03
D411, 421	7-pin	A14943-03
D431, 831	5-pin	A14897-00
D431, 831	6-pin	A14929-00
D431	7-pin	A14945-00
D441, 841	5-pin	A14889-00
D441, 841	6-pin	A14921-00
D441	7-pin	A14943-00
Padlock	5-pin	A23151-01
Padlock	6-pin	A23161-01
Padlock	7-pin	A23171-01

"H" Series Cylinder Function	Pins	Cylinder
H 511 knobs	5-pin	A30040-00
H 511 knobs	6-pin	A30040-01
H all other functions and designs	5-pin	A30028-00
H all other functions and designs	6-pin	A30028-01



Specify keyway.
Specify finishes: 606, 626



Note: Specify finish: 606, 629

Sliding Door Cylinder
For use in Adams Rite 4024 and 4026 cylinder pulls typically used in patio doors.

950 Specify 5, 6, or 7 pin

To order, specify cylinder number, keyway and finish.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Standard Cylinders



T381 Inside

T Series	Cylinders
Arrow O-bitted	A23170-011
Arrow KA	A23170-11A
Arrow KD	A23170-11D
Corbin 60 O-bitted	A23167-011
Corbin 60 KD	A23167-11D
Corbin Russwin L4 O-bitted	A23174-011
Corbin Russwin L4 KA4	A23174-11A
Russwin D1 O-bitted	A23168-011
Russwin D1 KD	A23168-11D
Sargent LA O-bitted	A23166-011
Sargent LA KD	A23166-11D
Schlage C O-bitted	A23160-011
Schlage C KA4	A23160-11A
Schlage C KD	A23160-11D
Schlage E O-bitted	A23159-011
Yale GA O-bitted	A23158-011
Yale Para O-bitted	A23169-011
Yale Para KD	A23169-11D
Arrow O-bitted	A23170-012
Arrow KA	A23170-12A
Arrow KD	A23170-12D
Corbin 60 O-bitted	A23167-012
Corbin 60 KD	A23167-12D
Corbin Russwin L4 O-bitted	A23174-012
Russwin D1 O-bitted	A23168-012
Russwin D1 KD	A23168-12D
Sargent LA O-bitted	A23166-012
Sargent LA KD	A23166-12D
Schlage C O-bitted	A23160-012
Schlage C KA4	A23160-12A
Schlage C KD	A23160-12D
Schlage E O-bitted	A23159-012
Yale GA O-bitted	A23158-012
Yale Para O-bitted	A23169-012
Yale Para KD	A23169-12D



T571



T Series
All other functions

T Series (continued)	Cylinders
Arrow O-bitted	A23170-000
Arrow KA4	A23170-0KA
Arrow KD	A23170-0KD
Corbin 60 O-bitted	A23167-000
Corbin 60 KD	A23167-0KD
Corbin Russwin L4 O-bitted	A23174-000
Russwin D1 O-bitted	A23168-000
Russwin D1 KD	A23168-0KD
Sargent LA O-bitted	A23166-000
Sargent LA KD	A23166-0KD
Schlage C O-bitted	A23160-000
Schlage C KA4	A23160-0KA
Schlage C KD	A23160-0KD
Schlage E O-bitted	A23159-000
Yale GA O-bitted	A23158-000
Yale Para O-bitted	A23169-000
Yale Para KD	A23169-0KD



X311, 561, 591
Elite and Troy

X Series	Cylinders
Arrow O-bitted	A23170-001
Arrow KA4	A23170-1KA
Arrow KD	A23170-1KD
Corbin 60 O-bitted	A23167-001
Corbin 60 KD	A23167-1KD
Corbin Russwin L4 O-bitted	A23174-001
Russwin D1 O-bitted	A23168-001
Russwin D1 KD	A23168-1KD
Sargent LA O-bitted	A23166-001
Sargent LA KD	A23166-1KD
Schlage C O-bitted	A23160-001
Schlage C KA4	A23160-1KA
Schlage C KD	A23160-1KD
Schlage E O-bitted	A23159-001
Yale GA O-bitted	A23158-001
Yale Para O-bitted	A23169-001
Yale Para KD	A23169-1KD

To order, specify cylinder number, keyway and finish.

FALCON Locks & Security Products

Standard Cylinders



X311, 591
Hana

X Series (continued)	Cylinders
Arrow O-bitted	A23170-002
Arrow KA4	A23170-2KA
Arrow KD	A23170-2KD
Corbin 60 O-bitted	A23167-002
Corbin 60 KD	A23167-2KD
Corbin Russwin L4 O-bitted	A23174-002
Russwin D1 O-bitted	A23168-002
Russwin D1 KD	A23168-2KD
Sargent LA O-bitted	A23166-002
Sargent LA KD	A23166-2KD
Schlage C O-bitted	A23160-002
Schlage C KA4	A23160-2KA
Schlage C KD	A23160-2KD
Schlage E O-bitted	A23159-002
Yale GA O-bitted	A23158-002
Yale Para O-bitted	A23169-002
Yale Para KD	A23169-2KD



X381 Outside, 411, 501, 511, 521, 581
Elite and Troy

X Series (continued)	Cylinders
Arrow O-bitted	A23170-005
Arrow KA4	A23170-5KA
Arrow KD	A23170-5KD
Corbin 60 O-bitted	A23167-005
Corbin 60 KD	A23167-5KD
Corbin Russwin L4 O-bitted	A23174-005
Russwin D1 O-bitted	A23168-005
Russwin D1 KD	A23168-5KD
Sargent LA O-bitted	A23166-005
Sargent LA KD	A23166-5KD
Schlage C O-bitted	A23160-005
Schlage C KA4	A23160-5KA
Schlage C KD	A23160-5KD
Schlage E O-bitted	A23159-005
Yale GA O-bitted	A23158-005
Yale Para O-bitted	A23169-005
Yale Para KD	A23169-5KD



X411, 501, 511, 521, 581 Hana

X Series (continued)	Cylinders
Arrow O-bitted	A23170-006
Arrow KA4	A23170-6KA
Arrow KD	A23170-6KD
Corbin 60 O-bitted	A23167-006
Corbin 60 KD	A23167-6KD
Corbin Russwin L4 O-bitted	A23174-006
Russwin D1 O-bitted	A23168-006
Russwin D1 KD	A23168-6KD
Sargent LA O-bitted	A23166-006
Sargent LA KD	A23166-6KD
Schlage C O-bitted	A23160-006
Schlage C KA4	A23160-6KA
Schlage C KD	A23160-6KD
Schlage E O-bitted	A23159-006
Yale GA O-bitted	A23158-006
Yale Para O-bitted	A23169-006
Yale Para KD	A23169-6KD



X571
Elite and Troy
X561 Hana

X Series (continued)	Cylinders
Arrow O-bitted	A23170-003
Arrow KA4	A23170-3KA
Arrow KD	A23170-3KD
Corbin 60 O-bitted	A23167-003
Corbin 60 KD	A23167-3KD
Corbin Russwin L4 O-bitted	A23174-003
Russwin D1 O-bitted	A23168-003
Russwin D1 KD	A23168-3KD
Sargent LA O-bitted	A23166-003
Sargent LA KD	A23166-3KD
Schlage C O-bitted	A23160-003
Schlage C KA4	A23160-3KA
Schlage C KD	A23160-3KD
Schlage E O-bitted	A23159-003
Yale GA O-bitted	A23158-003
Yale Para O-bitted	A23169-003
Yale Para KD	A23169-3KD



X571 Hana

X Series (continued)	Cylinders
Arrow O-bitted	A23170-004
Arrow KA4	A23170-4KA
Arrow KD	A23170-4KD
Corbin 60 O-bitted	A23167-004
Corbin 60 KD	A23167-4KD
Corbin Russwin L4 O-bitted	A23174-004
Russwin D1 O-bitted	A23168-004
Russwin D1 KD	A23168-4KD
Sargent LA O-bitted	A23166-004
Sargent LA KD	A23166-4KD
Schlage C O-bitted	A23160-004
Schlage C KA4	A23160-4KA
Schlage C KD	A23160-4KD
Schlage E O-bitted	A23159-004
Yale GA O-bitted	A23158-004
Yale Para O-bitted	A23169-004
Yale Para KD	A23169-4KD

To order, specify cylinder number, keyway and finish.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON Locks & Security Products

Standard Cylinders



B611



B Series
All other functions

B Series	Cylinders
Arrow O-bitted	A23170-011
Arrow KA	A23170-11A
Arrow KD	A23170-11D
Corbin 60 O-bitted	A23167-011
Corbin Russwin L4 KA4	A23174-13A
Corbin 60 KD	A23167-11D
Corbin Russwin L4 O-bitted	A23174-011
Russwin D1 O-bitted	A23168-011
Russwin D1 KD	A23168-11D
Sargent LA O-bitted	A23166-011
Sargent LA KD	A23166-11D
Schlage C O-bitted	A23160-011
Schlage C KA4	A23160-11A
Schlage C KD	A23160-11D
Schlage E O-bitted	A23159-011
Yale GA O-bitted	A23158-011
Yale Para O-bitted	A23169-011
Yale Para KD	A23169-11D
Arrow O-bitted	A23170-013
Arrow KA4	A23170-13A
Arrow KD	A23170-13D
Corbin 60 O-bitted	A23167-013
Corbin 60 KD	A23167-13D
Corbin Russwin L4 O-bitted	A23174-013
Russwin D1 O-bitted	A23168-013
Russwin D1 KD	A23168-13D
Sargent LA O-bitted	A23166-013
Sargent LA KD	A23166-13D
Schlage C O-bitted	A23160-013
Schlage C KA4	A23160-13A
Schlage C KD	A23160-13D
Schlage E O-bitted	A23159-013
Yale CA O-bitted	A23158-013
Yale Para O-bitted	A23169-013
Yale Para KD	A23169-13D



S561 Elite and Troy



S501, 511,
521, 581
Elite and Troy
S561 Hana



S501, 511, 521,
581 Hana

S Series	Cylinders
Arrow O-bitted	A23170-002
Arrow KA4	A23170-2KA
Arrow KD	A23170-2KD
Corbin 60 O-bitted	A23167-002
Corbin 60 KD	A23167-2KD
Corbin Russwin L4 O-bitted	A23174-002
Russwin D1 O-bitted	A23168-002
Russwin D1 KD	A23168-2KD
Sargent LA O-bitted	A23166-002
Sargent LA KD	A23166-2KD
Schlage C O-bitted	A23160-002
Schlage C KA4	A23160-2KA
Schlage C KD	A23160-2KD
Schlage E O-bitted	A23159-002
Yale GA O-bitted	A23158-002
Yale Para O-bitted	A23169-002
Yale Para KD	A23169-2KD
Arrow O-bitted	A23170-003
Arrow KA4	A23170-3KA
Arrow KD	A23170-3KD
Corbin 60 O-bitted	A23167-003
Corbin 60 KD	A23167-3KD
Corbin Russwin L4 O-bitted	A23174-003
Russwin D1 O-bitted	A23168-003
Russwin D1 KD	A23168-3KD
Sargent LA O-bitted	A23166-003
Sargent LA KD	A23166-3KD
Schlage C O-bitted	A23160-003
Schlage C KA4	A23160-3KA
Schlage C KD	A23160-3KD
Schlage E O-bitted	A23159-003
Yale GA O-bitted	A23158-003
Yale Para O-bitted	A23169-003
Yale Para KD	A23169-3KD
Arrow O-bitted	A23170-004
Arrow KA4	A23170-4KA
Arrow KD	A23170-4KD
Corbin 60 O-bitted	A23167-004
Corbin 60 KD	A23167-4KD
Corbin Russwin L4 O-bitted	A23174-004
Russwin D1 O-bitted	A23168-004
Russwin D1 KD	A23168-4KD
Sargent LA O-bitted	A23166-004
Sargent LA KD	A23166-4KD
Schlage C O-bitted	A23160-004
Schlage C KA4	A23160-4KA
Schlage C KD	A23160-4KD
Schlage E O-bitted	A23159-004
Yale GA O-bitted	A23158-004
Yale Para O-bitted	A23169-004
Yale Para KD	A23169-4KD

To order, specify cylinder number, keyway and finish.

FALCON Locks & Security Products

Standard Cylinders



F Series
All Functions and Designs

F Series	Cylinders
Arrow O-bitted	A23170-018
Arrow KA4	A23170-8KA
Arrow KD	A23170-8KD
Corbin 60 O-bitted	A23167-008
Corbin 60 KD	A23167-8KD
Corbin Russwin L4 O-bitted	A23174-008
Russwin D1 O-bitted	A23168-008
Russwin D1 KD	A23168-8KD
Sargent LA O-bitted	A23166-008
Sargent LA KD	A23166-8KD
Schlage C O-bitted	A23160-008
Schlage C KA4	A23160-8KA
Schlage C KD	A23160-8KD
Schlage E O-bitted	A23159-008
Yale GA O-bitted	A23158-008
Yale Para O-bitted	A23169-008
Yale Para KD	A23169-8KD



D411, 421, 811, 821



D431, 831



D441, 841

D Series	Cylinders
Corbin Russwin L4 O-bitted	A23274-003
Russwin D1 O-Bitted	A23268-003
Russwin D1 KD	A23268-3KD
Schlage C O-bitted	A23260-003
Schlage C KA4	A23260-3KA
Schlage C KD	A23260-3KD
Schlage E O-bitted	A23259-003
Yale CA O-bitted	A23258-003
Corbin Russwin L4 O-bitted	A23274-002
Russwin D1 O-bitted	A23268-002
Russwin D1KD	A23268-2KD
Schlage C O-bitted	A23260-002
Schlage C KA4	A23260-2KA
Schlage C KD	A23260-2KD
Schlage E O-bitted	A23259-002
Yale GA O-bitted	A23258-002
Yale Para KD	A23269-3KD
Corbin Russwin L4 O-bitted	A23274-001
Russwin D1 O-bitted	A23268-001
Russwin D1KD	A23268-1KD
Schlage C O-bitted	A23260-001
Schlage C KA4	A23260-1KA
Schlage C KD	A23260-1KD
Schlage E O-bitted	A23259-001
Yale CA O-bitted	A23258-001
Yale Para KD	A23269-1KD



H511
All Knobs

H Series	Cylinders
Arrow O-bitted	A23170-007
Arrow KA4	A23170-7KA
Arrow KD	A23170-7KD
Corbin 60 O-bitted	A23167-007
Corbin 60 KD	A23167-7KD
Corbin Russwin L4 O-bitted	A23174-007
Russwin D1 O-bitted	A23168-007
Russwin D1 KD	A23168-7KD
Sargent LA O-bitted	A23166-007
Sargent LA KD	A23166-7KD
Schlage C O-bitted	A23160-007
Schlage C KA4	A23160-7KA
Schlage C KD	A23160-7KD
Schlage E O-bitted	A23159-007
Yale GA O-bitted	A23158-007
Yale Para O-bitted	A23169-007
Yale Para KD	A23169-7KD
Arrow O-bitted	A23170-010
Arrow KA4	A23170-10A
Arrow KD	A23170-10D
Corbin 60 O-bitted	A23167-010
Corbin 60 KD	A23167-10D
Corbin Russwin L4 O-bitted	A23174-010
Russwin D1 O-bitted	A23168-010
Russwin D1 KD	A23168-10D
Sargent LA O-bitted	A23166-010
Sargent LA KD	A23166-10D
Schlage C O-bitted	A23160-010
Schlage C KA4	A23160-10A
Schlage C KD	A23160-10D
Schlage E O-bitted	A23159-010
Yale GA O-bitted	A23158-010
Yale Para O-bitted	A23169-010
Yale Para KD	A23169-10D



H Series & All Other Deadbolt Functions



Padlocks

Padlocks	Cylinders
Arrow O-bitted	A23170-002
Arrow KA4	A23170-2KA
Arrow KD	A23170-2KD
Corbin 60 O-bitted	A23167-002
Corbin 60 KD	A23167-2KD
Corbin Russwin L4 O-bitted	A23174-002
Russwin D1 O-bitted	A23168-002
Russwin D1 KD	A23168-2KD
Sargent LA O-bitted	A23166-002
Sargent LA KD	A23166-2KD
Schlage C O-bitted	A23160-002
Schlage C KA4	A23160-2KA
Schlage C KD	A23160-2KD
Schlage E O-bitted	A23159-002
Yale GA O-bitted	A23158-002
Yale Para O-bitted	A23169-002
Yale Para KD	A23169-2KD

To order, specify cylinder number, keyway and finish.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON Locks & Security Products

Standard Cylinders

Keyblanks and Keys











Access Bow

2" access bow is made of blue plastic and meets requirements of Title 24 of the California Code for Handicapped.



Emergency Tool

012727-000-30 for hotel function cylindrical locks



Access key blank

After cutting, press into blue plastic bow shown above. Order blanks and bows separately.

Key Blanks (multiples of 50 except where noted) Description	Standard	Plain Both Sides
5-pin standard	KB573*	KB751*
6-pin standard	KB577*	KB761*
7-pin standard	KB581*	KB771*
5-pin large bow (25/box)	KB544*	—
6-pin large bow (25/box)	KB590*	—
6-pin emergency MK	KB579*	—
7-pin emergency MK	KB583*	—
6-pin EMK, large bow (25/box)	KB592*	—
5-pin blade or access bow	KB573-1*	—
6-pin blade or access bow	KB577-1*	—
7-pin blade or access bow	KB581-1*	—
Plastic access bow only	001911-001-70	—
Blockokey® construction key	KB525	—

Cut Key Description	Standard	Plain Both Sides
5-pin	KB574	KB794
6-pin	KB578	KB797
7-pin	KB582	KB799
Large bow 5-pin	KB545	—
Large bow 6-pin	KB591	—
5-pin construction MK	KB565	—
6-pin construction MK	KB566	—
7-pin construction MK	KB567	—
6-pin emergency MK	KB580	—
7-pin emergency MK	KB584	—
6-pin EMK, large bow (25/box)	KB593	—
Handicap bow 5-pin	KB905	—
Handicap bow 6-pin	KB906	—
Handicap bow 7-pin	KB907	—
Blockokey® construction key	KB531	—

* Suffix key section to catalog number. Example:KB573G



KB536

Removal tool for key block.

FALCON
Locks & Security Products

Standard Cylinders

Kit 1389

Contains cap tool and most parts on this page, except hotel function and 7-pin tailpieces

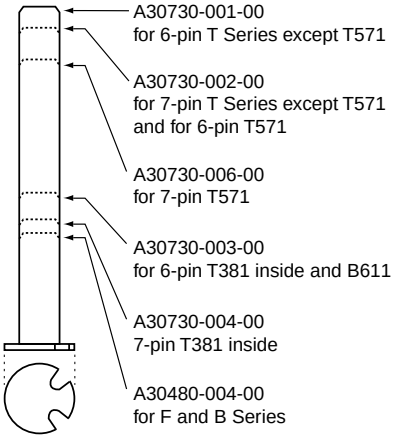

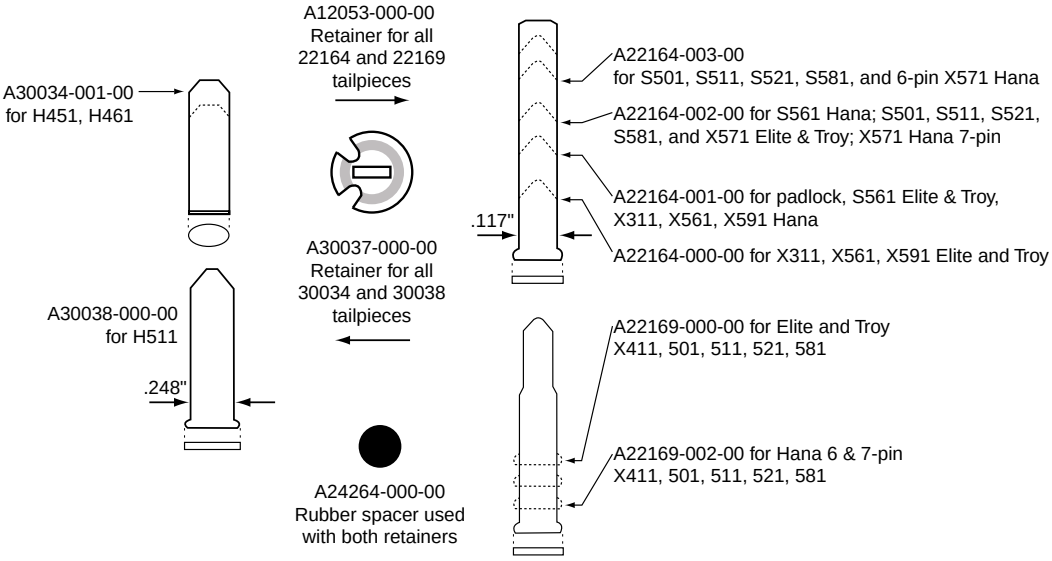

D Series Lazy Tailpiece

Single Cylinder



A08395-000-00
Retainer

Double Cylinder

A14351-000-00
Retainer

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Standard Cylinders

Service Equipment and Supplies

Pin Kits

1418 Standard
(includes key gauge, follower and cylinder cap tool)

1417 Restricted Keyways
(includes key gauge, follower and cylinder cap tool)



Key Gauge

030113-000-30	Standard keyways .018" increment
042613-000-60	Restricted keyways .025" increment



Kit Refills: Pins and Springs

A08553-00*-00	Bottom pins for standard keyways, *sizes 0 thru 9, 100-pack
A08580-00*-00	Master pins for standard keyways, *sizes 2 thru 9, 100-pack
A08552-000-00	Top pins, 100-pack
A08554-000-00	Tumbler springs, 100-pack
A08556-000-00	Construction master pins, 100-pack

Miscellaneous Cylinder Parts

A02750-000-00	Cam screw 100-pack
031100-000-30	Hex nut for cam lock and mortise cylinders
012162-000-10	Cylinder cap for Falcon keyway cylinders only.
A12165-000-00	Cap retaining pin for Falcon keyway cylinders only, 10-pack
A12166-000-00	Spring for retaining pin for Falcon keyway cylinders only, 100-pack

Other Service Equipment

1416	Cylinder cap tool - steel
1421	Plug follower
1453	Depth key set, 5-pin
1453-1	Depth key set, 6-pin
1453-2	Depth key set, 7-pin

Interchangeable Core

FALCON
Locks & Security Products

Overview

Interchangeable Core Advantages

Interchangeable core (I/C) offers maximum flexibility to the building owner. Whenever a key is lost or stolen, locks can be rekeyed quickly by non-locksmith personnel. All it takes is the special CONTROL key. This key is used to remove and install all cores in the system. Just go to the door, remove the old core and install the new one with the control key. Security is regained in seconds!

Falcon's interchangeable cores and I/C locksets are compatible with other small format interchangeable core (SFIC) products, such as Best and Arrow. Use our locks with their cores and vice-versa; In most cases Falcon can even furnish cores master keyed into your existing Best or Arrow key system. Just include a copy of your existing bitting list with the order.

Construction Cores

Interchangeable core jobs requiring construction keying are furnished with temporary cores which are keyed alike to a combination unrelated to the permanent system's master key.

When the building is turned over to the owner, the permanent cores are installed and the construction cores are returned to Falcon Lock for credit.

Orders must include the name and address of the person to whom the construction keys and permanent master and change keys should be sent.

See product catalogs for more information on types of construction cores available.

Interchangeable Core Keyways

The "A" keyway is standard for I/C products and will be supplied unless otherwise specified. Falcon keyways shown here are equivalent to Best and Arrow I/C keyways of the same names



A B C D DD E F G H J K L M N Q R TB TD

Consult factory for restricted keyways not listed here.

When ordering locks or cores master keyed into existing Best, Arrow or other compatible I/C systems, a copy of the bitting I list for the existing system is required with the order.

How to Order

Less Core

Specify catalog number and finish. Example: C986 626

Complete with Core

Add Keyway, "WIC" and keying instructions. Example: C986 A* WIC 626 AA12

* "A" keyway standard. Falcon reserves the right to assign the keyway for new key systems.

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

Interchangeable Core

FALCON Locks & Security Products

A2, A3 and A4 Systems

Falcon master keying uses the A2 System (depths 0 - 9) standard. We can provide cores into competitors' A4 (depths 0 - 5) key systems but we generate new A4 systems solely at the discretion of our Key Systems Department. The factory does not support the A3 System (Depths 0 - 6). However, any Falcon core can be combinated to A3 specs in the field.

A2, A3 and A4 Systems

Description:
Uncombinated cores are supplied without pins, springs or keys. May be keyed into A2, A3 and A4 Systems in the field. Combinated cores are keyed and ready to install. They are furnished with two change keys each. A2 System standard, A4 special.
See page 18 for details.

Packaging:
Uncombinated cores are packed 20 per box for standard and 10 per box for hotel function.

Finishes:
Standard: 606 and 626.
Special Order: 605, 612, 613 and 625. Consult factory .

Logo:
Standard: Cores and keys are supplied with the Falcon logo .
Optional: Combinated cores ordered without logo are furnished with plain (non-embossed) keys.

Interchangeable Core
Available with Falcon style spring cover (shown) or Best® style individual pin chamber caps.
See table for product numbers.

Standard cores use a single spring cover to seal pin chambers.



With Best® style capping, each pin chamber is sealed with its own individual cap.



Regular Core (suffix keyway to number)	Uncombinated		Combinated	
	6-Pin	7-Pin	6-Pin	7-Pin
Standard	C646	C647	C606	C607
Best® style capping	CB846	CB847	CB806	CB807
No logo	C648	C649	C608	C609
No logo, Best® capping	CB848	CB849	CB808	CB809

To order, specify cylinder number, keyway and finish.

Interchangeable Core Combinating Aids
For more assistance on A2 systems, Falcon offers tools to aid you.

FA-GN-1022 "How to Key Falcon Interchangeable Core" Guide.

FA-GN-1023 Worksheet/ Pinning Chart for Falcon Interchangeable Core.

FA-GN-1026 Falcon Sliding Pinning Chart or A2 Systems.

Contact your local Falcon representative for any of these useful tools.

Interchangeable Core

FALCON Locks & Security Products

Key Blanks and Keys



Standard



Plain Both Sides
(non-embossed)



Access Bow

2″ access bow is made of blue plastic and meets requirements of Title 24 of The California Code for Handicapped.

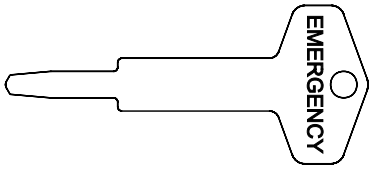

Emergency tool

012727-000-30
for hotel function
cylindrical locks

Key Blanks (suffix key section and order in multiples of 50)

Description	Standard	Plain Both Sides
Standard	KB628*	KB718*
Stamped CONTROL	KB608*	KB744*
M Series EMERGENCY	KB737*	KB748*
Blade for 2″ access bow	KB633*	n/a
Plastic access bow only	001911-001-70	n/a

Cut Key (suffix key way)

Description	Standard		Plain Both Sides	
Standard	KB632-1	KB632-2	KB673-1	KB673-2
CONTROL	KB609-1	KB609-2	KB778-1	KB778-2
M Series EMERGENCY	KB738-1	KB738-2	KB779-1	KB779-2
2″ access bow	KB916	KB916-1	n/a	n/a

Extensive key systems sometimes require more than one keyway. Double, triple, quadruple and quintuple-milled keys must then be furnished for top master and control keys. Only certain milling combinations are practical. Common multi-section keys include AB, AE, DE, EF, FG, AEG, DEF, EFG, DEFG, JKLM, ADEFG. Consult factory for other requirements.



Access Key Blank

After cutting, press into blue plastic bow shown above. Order blanks and bows separately.

Emergency Key Blanks

For C261, C262, C264 and C265 hotel function mortise cylinders.



Hotel Mortise EMK



Plain Both Sides
(non-embossed)

Interchangeable Core

FALCON
Locks & Security Products

Cylindrical Lock Tailpieces

Throw members shown actual size.

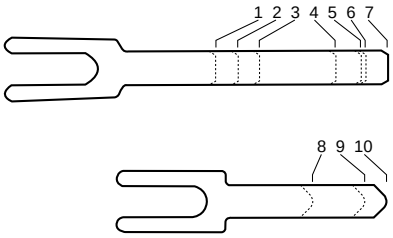

B, RU, T and X Series			
Ref.	Length	Part number	Application
1	1.40"	022175-000-30	X Series, except X571
2	1.53"	030739-003-30	RU, T381 inside only, 7-pin
3	1.69"	030739-002-30	RU, T381 inside only, 6-pin
4	2.22"	030739-005-30	RU, T571 7-pin
5	2.37"	030739-004-30	RU, T571 6-pin
6	2.41"	030739-001-30	RU, T Series 7-pin except T381 inside and T571
7	2.56"	030739-000-30	RU, T Series 6-pin except T381 inside and T571
8	1.32"	031731-000-30	B Series 6 and 7-pin
9	1.66"	022175-002-30	X571 7-pin
10	1.81"	022175-001-30	X571 6-pin

F Series

A30624-000-00 6 and 7 pin.



S Series

A24386-001-00 6-pin

A24387-001-00 7-pin

012683-001-50 Spacer



"Disposable Construction" Core

1408 Disposable Small Format Interchangeable Construction Core



For more options and information on construction keying, please consult page 7 of this catalog.

Interchangeable Core

FALCON Locks & Security Products

Key Bitting Punch

1208 A2 System



Stamping Fixture

1398 Holds one key and one core for face or side marking



Key Gauge

012612-000-60 A2 System
030425-000-60 A4 System



Pin Kit

1404 A2 System, Falcon spring cover cores (standard)
1391 A2 System, Best® style capping
1403 A4 System, Falcon spring cover cores
1390 A4 System, Best® style capping



Depth Bars for Key Machine

031033-000-30 A3 System
031034-000-30 A4 System



Capping Pin and Ejector Pin

1392 Capping pin, Best® style
1405 Ejector tool



Miscellaneous I/C Parts

A12663-001-00 Drive pins, package of ten (10)
A12664-010-00 Drive washer, package of ten (10)

Capping Blocks

1411 Set, Falcon spring cover cores
1414 Block only, Falcon spring cover cores
1415 Tapping plate - new style (dovetail)
1393 Capping block, Best® style capping



Kit Refills: Pins, Springs, etc. (100-pack except where noted)

A12635-0xx-00	A2 top pins, sizes 2 thru 19: replace "xx" with size
A12636-00x-00	A2 bottom pins, sizes 0 thru 9: replace "x" with size
A30375-0xx-00	A4 top pins, sizes 1 thru 11: replace "xx" with size
A30376-00x-00	A4 bottom pins, sizes 0 thru 5: replace "x" with size
A12637-000-00	Tumbler Spring
A12637-500-00	Tumbler Spring, 500-pack
A12638-000-00	21C Caps for Best® style cores, 500-pack
A12639-001-00	Spring cover, 6-Pin
A12639-002-00	Spring cover, 7-Pin

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

FALCON
Locks & Security Products

Mortise Cylinders

Mortise, Rim and Cam Lock for Standard Cylinders



Note: Specify finish: 605, 606, 612, 613, 626, 629, 630

Mortise Cylinder

900 series cylinders are furnished with #4 straight cam and 250 Series with #1 cloverleaf cam unless otherwise specified.

See table for product numbers.

See pages 23-25 for optional cams and 26 for collars.



Note: Specify finish: 605, 606, 612, 613, 626, 629, 630

Thumbturn Cylinder

Furnished with #4 straight cam except 970 Series furnished with #1 cloverleaf cam unless otherwise specified.

See table for product numbers.

See pages 23-25 for optional cams and 26 for collars.



Note: Specify finish: 605, 606, 612, 613, 625, 626

Dummy Cylinder

Used to plug hole in door where lock remains but cylinder operation is no longer needed.

984D 1″

985D 1-1/8″



Note: Specify finish: 605, 606, 612, 613, 626, 629, 630

Rim Cylinder

Horizontal tailpiece standard. May be changed to vertical orientation in the field. Furnished with collar, back plate and 12-24 break off screws.

951 Specify 5, 6 or 7-pin

Keyed Mortise Cylinders Catalog Number	Length	Pins	Application
985	1-1/8"	5 or 6	Generic
986	1-1/4"	5 or 6	Generic
987	1-3/8"	6 or 7	Generic
988	1-1/2"	6 or 7	Generic
990	1-3/4"	6 or 7	Generic
992	2"	6 or 7	Generic
250	1-1/8"	6	M451 hotel function
251	1-1/4"	6	M451 hotel function
252	1-3/8"	6	M451 hotel function
253	1-3/8"	7	M451 hotel function

Thumbturn Mortise Cylinders Catalog Number	Length	Pins	Application
985T	1-1/8"	—	Generic
986T	1-1/4"	—	Generic
965	1-1/8"	—	K911 Classroom Thumbturn, RH (CW)
966	1-1/8"	—	K911 Classroom Thumbturn, LH (CCW)
973	1-1/8"	—	M911 Classroom Thumbturn, RH (CCW)
974	1-1/8"	—	K911 Classroom Thumbturn, LH (CW)



Note: Specify finish: 605, 606, 612, 613, 626, 629, 630

Cam Lock - Heavy Cam

Includes stop washers for rigid and lazy cam operation. Field reversible for RH or LH doors by positioning of stop screw on back of housing. Requires 1-3/16″ cylinder hole and fits doors up to 1-1/8″ thick.

945 Specify 5 or 6-pin



Note: Specify finish: 606, 626

Mailbox Cylinder

U.S. Postal regulations prohibit master keying of mailbox locks. Mailboxes must be ordered specifically for Falcon cylinders from the mailbox manufacturer.

954 Specify 5, 6 or 7-pin

To order, specify cylinder number, keyway and finish.

FALCON
Locks & Security Products

Mortise Cylinders

Mortise Cylinder Housings for Interchangeable Core



Note: Specify finishes:
605, 606, 612,
613, 626, 629, 630

Mortise Cylinder Housing

Standard housings furnished with #5 straight cam and hotel function housings furnished with #10 cloverleaf cam. See table for product numbers.

See pages 23-25 for optional cams and pages 26-27 for collars.

Catalog Number	Length	Pins	Application
C986	1-1/4"	6	Generic
C987	1-3/8"	6 or 7	Generic
C988	1-1/2"	6 or 7	Generic
C990	1-3/4"	6 or 7	Generic
C992	2"	6 or 7	Generic
C996	1-1/4"	6	Unassembled, less cam
C997	1-3/8"	6 or 7	Unassembled, less cam
C261	1-1/2"	6	M451 Hotel function RH
C262	1-5/8"	7	M451 Hotel function RH
C264	1-1/2"	6	M451 Hotel function LH
C265	1-5/8"	7	M451 Hotel function LH



Note: Specify finishes:
605, 606, 612,
613, 626, 629, 630

Cam Lock

Key removable in locked position only. Cam rotates 360° and can be installed for right or left hand operation. Requires 1-3/16" cylinder hole and fits doors up 1-3/8" thick.

C943 Specify 6 or 7-pin



Note: Specify finishes:
605, 606, 612,
613, 626, 629, 630

Rim Cylinder Housing

Horizontal tailpiece standard.

May be changed to vertical orientation in the field. Furnished with collar, back plate and 12-24 break-off screws.

C952 Specify 6-pin
C953 Specify 6 or 7-pin



Note: Specify finishes:
605, 606, 612,
613, 625, 626

Tapered Head Mortise Cylinder Housing

Designed for proper fit without collars on narrow stile aluminum doors. Furnished with #8 Adams Rite cam.

C976 Specify 6-pin
C977 Specify 6 or 7-pin



Note: Specify finishes:
605, 606, 612,
613, 626, 629, 630

Cam Lock - Heavy Cam

Includes stop washers for rigid and lazy cam operation. Field reversible for RH or LH doors by positioning of stop screw on back of housing. Requires 1-3/16" cylinder hole and fits doors up to 1-1/8" thick.

C945 Specify 6 or 7-pin

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Mortise Cylinders

Each part number indicates a package of 10 cams

Falcon	Lock	Reference Number	Part Number	For Cylinder
	Falcon M Series deadbolt functions	1 2 3 10	A09894-001-00 A09894-002-00 A09894-003-00 A12667-007-00	Falcon, Ilco, Lori, Schlage Arrow, Sargent & Yale Corbin Russwin Falcon I/C
	Falcon K900 Series, M Series non-deadbolt functions. Most old black cast iron locks.	4 5	A09897-000-00 A12667-003-00	Conventional I/C
	Falcon M381 outside	14 15	A20065-000-00 A20278-000-00	Conventional I/C
	Old Falcon K Series small deadlock	17	A09895-000-00 A12667-005-00	Conventional I/C

Monarch	Lock	Reference Number	Part Number	For Cylinder
	Monarch dogging cylinder Install cam upside down.	24 5	A09897-024-00 A12667-003-00	Conventional I/C
	Monarch Delta trim for 17C concealed vertical rod	22 23 20	A09894-022-00 A09894-023-00 A12667-020-00	Arrow , Sargent and Yale Corbin Russwin I/C

FALCON
Locks & Security Products

Mortise Cylinders

Each part number indicates a package of 10 cams

Schlage	Lock	Reference Number	Part Number	For Cylinder
	Schlage L Series	13 12	A09888-000-00 A12667-008-00	Conventional I/C
	Schlage K460 small deadlock	— —	A09896-000-00 A12667-004-00*	Conventional I/C

Other Manufacturers	Lock	Reference Number	Part Number	For Cylinder
	4500 and 4700 Series	8	A12667-001-00	I/C
	Adams Rite 4070 deadlock	16 9	A09898-000-00 A12667-002-00	Conventional I/C
	Arrow, Corbin Russwin ML2200 except ML2255 and ML2242 inside	— 11	A20069-000-00 A12667-011-00	Conventional I/C

* Thick cams require throw pin A12663-003-00

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

FALCON
Locks & Security Products

Mortise Cylinders

Each part number indicates a package of 10 cams

Other Manufacturers	Lock	Reference Number	Part Number	For Cylinder
	Corbin Russwin DL4000 Series	27	A12677-013-00	I/C
	Corbin Russwin master ring black cast iron locks only. Requires bushing A09890-000-00	25	A12667-006-00	I/C
	Sargent & Yale	26 7	A08867-000-00 A12667-000-00	Conventional I/C
	Sargent 7737	—	A12667-03A-00*	I/C
	Ving Card key bypass cylinder	18	A30516-000-00	I/C

* Thick cams require throw pin A12663-003-00

Cam Assortment Kits

1396 Standard Cylinders
Contains ten each #1, 4 and 13; fifteen #6 and five each #2, 3 and 14 cams, plus 50 cam screws and a plug follower.

1397 I/C Mortise Cylinders
Contains ten each #5, 7, 10, 11 and 12; twenty #8 and five #15 cams, a supply of throw member pins and plates, and one #1402 staking punch.

FALCON Locks & Security Products

Mortise Cylinders

Standard Collars for Cylinders Ordered Separately

Length	Cylinder	Non-AR Cams	AR Cam
1"	984D	A08794-000	—
1-1/8"	250, 965, 966, 973, 974, 985 Series	A08794-000	008876-002
1-1/4"	251, 986 Series, C986, C996	A08794-001	008876-003
1-3/8"	252, 253, 987, C987, C997	A08794-002	008876-004
Longer	C260 Series, (C)988, (C)990, (C)992, 995, 999	A08794-000	008876-000

Escutcheon Trim Ring



Door Thickness	Function	985 1-1/8"	(C)986 1-1/4"	(C)987 1-3/8"	(C)988 1-1/2"
1-1/2"	Single cylinder	Washer only	A08790-000	A08790-001	A08790-002
1-1/2"	Double cylinder	A08790-000	—	—	—
1-3/4"	Single cylinder	Washer only	Washer only	A08790-000	A08790-001
1-3/4"	Double cylinder	Washer only	A08790-000	A08790-001	A08790-002
2"	Single cylinder	—	Washer only	A08790-000	A08790-001
2"	Double cylinder	—	Washer only	A08790-000	A08790-001
2-1/4"	Single cylinder	—	—	Washer only	A08790-000
2-1/4"	Double cylinder	—	—	Washer only	—
2-1/2"	Single cylinder	—	—	—	Washer only
2-1/2"	Double cylinder	—	—	—	Washer only

Sectional Trim Ring



Door Thickness	Function	985 1-1/8"	(C)986 1-1/4"	(C)987 1-3/8"	(C)988 1-1/2"
1-1/2"	Single cylinder	A08794-001	A08794-002	—	—
1-1/2"	Double cylinder	A08794-002	A08794-003	—	—
1-3/4"	Single cylinder	A08794-000	A08794-001	A08794-002	—
1-3/4"	Double cylinder	A08794-001	A08794-002	A08794-003	—
2"	Single cylinder	—	A08794-000	A08794-001	A08794-002
2"	Double cylinder	A08794-000	A08794-001	A08794-002	A08794-003
2-1/4"	Single cylinder	—	—	A08794-000	A08794-001
2-1/4"	Double cylinder	—	A08794-000	A08794-001	A08794-002
2-1/2"	Single cylinder	—	—	—	A08794-000
2-1/2"	Double cylinder	—	—	A08794-000	A08794-001

To order, specify part number and finish.
(e.g. A08790-000-626)

Questions? Call: 800-266-4456 / FAX: 800-777-8229 / or e-mail info@falconlock.com
Falcon Lock Company 2650 Orbiter Street Brea, CA 92821-6265 / Visit us on the Internet at www.falconlock.com

IR Security & Safety

Mortise Cylinders

Rim Cylinder Tailpieces

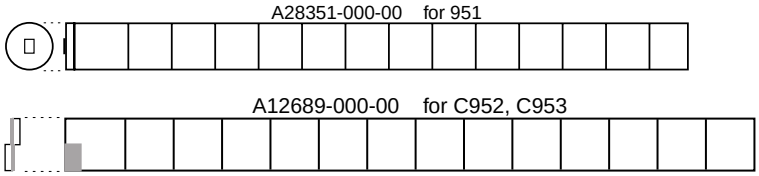

Mortise Accessories



Mortise Cam Changing Tools

1400 Tool set with staking punch

1401 Tool only

1402 Cam staking punch only



Mortise Cylinder Wrench

1407 Verifies cam operation and preserves cylinder finish during installation

002807-000-30 Mortise cylinder security screw

FALCON
Locks & Security Products

Falcon Fits

2650 Orbiter Street, Brea, CA 92821-6265
Phone 714-572-6008/800-266-4456
US FAX 800-777-8229/International FAX 714-572-0482
www.falconlock.com

Security & Safety®

Pub. No. FA-GN-1012
Ver. 1, Rev. 6/00
©2000 Ingersoll-Rand Company
PC14956