ARCHITECTURAL HINGES ➤ TRIM & AUXILIARY HARDWARE ➤ THRESHOLD & WEATHERSTRIPPING ➤ RESIDENTIAL HARDWARE ➤ SLIDING DOOR HARDWARE ➤ ROTON CONTINUOUS GEARED HINGES ➤ STAINLESS STEEL CONTINUOUS HINGES ➤

HAGER®
COMPANIES
ST. LOUIS, MISSOURI

TRIM & AUXILIARY HARDWARE

Trim & Auxiliary Alphabetical Index

	Page
Ball Catch, Adjustable	F29
Bars, Carry	F25
Bars, Push	F55-F57
Bolts, Automatic	F23-F24
Bolts, Self-Latching	F24
Bolts, Lever Extension	F23
Bolts, Slide	F22
Bolts, Surface	F21-F22
Brackets, Hand Rail	F26
Bumper, Curved Roller	F21
Bumper, Roller	F21
Bumper, Wall	F29,
Check, Chain Door	F26
Coat Hooks	F35-F36
Conversion Kit, Roller Latch	F27
Coordinators	F25-F26
Details, Fastening	F4
Details, Push and Pull Plate	F5
Door Viewer	F37
Edgings, Door	F10
Floor Stops	F14-F19
Floor Stop, Heavy Duty	F19
Guard, Corner	F10
Guard, Door	F21
Hand of Doors	F4
Holders, Door	F19-F20, F30
Holders with Stop	F17-F19
Knocker, Door	F29
Latch, Pocket Door	F31
Latch, Push/Pull	F62
Latch, Roller	F28, F37
Latch Protection Plate	F34
Mounting, Flush Back	F5
Mounting Brackets, Coordinator	F25
Plate, ASA Strike	F31
Plate, Door Protection	F11
Plate, Filler	F32-F33
Plate, Pull	F53
Plate, Pull (Security)	F51, F54
Plate, Push	F7-F9

	Page
Pull, Bar	F74
Pull, C-shaped	F64-F65
Pull, Cast	F46-F47, F50, F67
Pull, Cuda	F75
Pull, Curved	F65, F73
Pull, Cylinder	F54
Pull, Edge	F78
Pull, Flush	F49-F50, F52, F78
Pull, Fly Rod	F75
Pull, Gator	F77
Pull, Heron	F77
Pull, Horn	F69
Pull, Offset	F48, F51, F67, F74
Pull, Round	F48
Pull, S-shaped	F66
Pull, Security	F49, F51-F52
Pull, Segment Shape	F71
Pull, Tarpon	F76
Pull, Vertical	F63, F70
Pull, Wire	F27, F62
Pull, Wrought	F45-F47
Push Bars	F55-F57
Push/Pull Sets	F28, F58-F61
Riser Plate, Dome Stop	F15
Rubber Tip, Replacement	F20
Sets, Push/Pull	F28, F58-F61
Shim, Template Hinge	F33
Shim for Door Guard	F21
Signs, ADA	F42-F44
Signs, Engraved Metal	F40
Signs, Engraved Plastic	F38-F39, F41
Signs, Tactile	F42-F44
Silencers, Door	F27
Stops, Dome	F14
Stops, Floor	F14-F16
Stops, Wall	F12-F13, F16-F19
Strike, Dust Proof	F22
Symbols, Metal Finish	F3

Trim & Auxiliary General Information

Metal Finish Symbols

HAGER	TYPE OF METAL	BASE METAL	ANSI
3	Bright–Brass	Brass	605
3A	Brass–Bright, No Lacquer	Brass	—
4	Brass–Satin	Brass	606
5	Brass–Satin, Oxidized & Relieved	Brass	609
19	Brass–Flat Black	Brass	622
9	Bronze–Bright	Brass/Bronze	611
10	Bronze–Satin	Brass/Bronze	612
10A	Bronze–Satin Oxidized & Lacquered	Brass/Bronze	614
10B	Bronze–Satin Oxidized & Oil Rubbed	Brass/Bronze	613
20A	Bronze–Dark Statuary	Brass/Bronze	624
26	Chromium Plating, Bright	Brass/Bronze	625
26D	Chromium Plating, Satin	Brass/Bronze	626
27	Aluminum–Satin	Aluminum	627
28	Aluminum– Satin, Anodized Clear	Aluminum	628
32	Stainless Steel–Bright	300 Series	629
32D	Stainless Steel–Satin	300 Series	630
S1	Painted Aluminum	Cast Iron	689
S2	Painted Brass	Cast Iron	696
S3	Painted Bronze	Cast Iron	691

Glossary of Abbreviations

AL – Aluminum
ARS – Extra Row
BRS – Brass
BTB – Back to Back
BRZ – Bronze
B3E – Bevel Top & Side Edges
CFC – Cut for Cylinder
CFT – Cut for Thumbturn
CSK – Countersunk
CTC – Center to Center
CYL – Cylinder
DA – Double Acting
DR – Door
E – Engraved
FB – Flush Back Mounting
FC – Flush Cup
FH – Flathead
HCWD.– Hollowcore Wood Door
HM – Hollow Metal
ID – Inside Diameter
KAL – Kalamein
KD – Packaged Unassembled
LCD – Lead Core Door
MS – Machine Screw
na – Not Available
NS – Narrow Stile
OH – Ovalhead
RC – Rounded Corners
SA – Single Acting
SC – Solid Core
SCR – Screw
SMS – Sheet Metal Screw
SS – Stainless Steel
STL – Steel
TB – Thru-Bolt (used to attach hardware to door)
TCF – Steel Thread Cutting Screw
TFA – Steel Tapping Screw
TMS – To Template, W/MS
WD – Wood Door
WOC – Grip to Align
W/ – With
WS – Wood Screw
x – By or With W/

Trim & Auxiliary General Information

Hand of Doors

The "hand" of a door is determined by the direction it swings when viewed from the exterior or corridor side of the door.

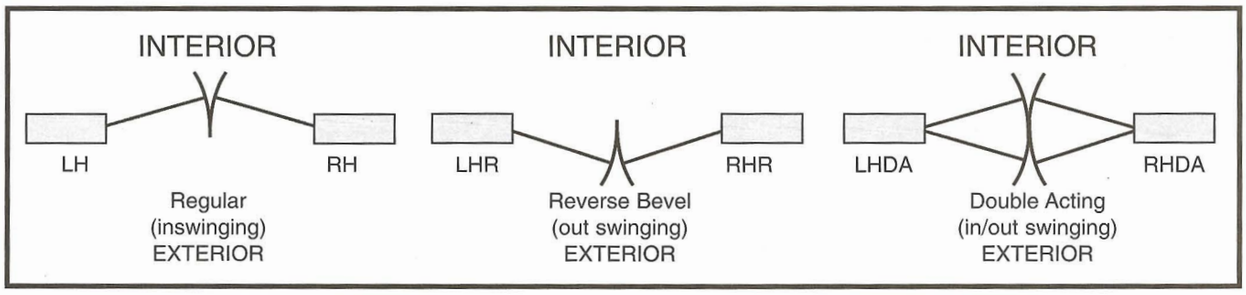

Fasteners

Illustrated below are various types of fasteners that can be furnished by Hager Companies. Please specify type of fastening desired. All types of fastening cannot be used with all items of hardware. If specified method is not possible, we reserve the right to furnish whatever type we feel is best suited for the installation. When used with tempered glass doors specify thickness of glass and hole diameter.

SEX BOLT and machine screws.
Various sizes

TAMPIN SHIELD.
When specified,used with floor stop.

PLASTIC SHIELD and full threaded screw.



TOGGLE BOLT.



TOGGLER* furnished with wall bumpers.
Supplied with #6-1 3/4" screw.

THRU-BOLT and countersink washer.
Flat head. Size as required.

SPANNER HEAD machine screws
Various sizes furnished at extra charge.

TORX HEAD machine screws.
Various sizes furnished at extra charge.



TYPE 1



TYPE 2



TYPE 3



TYPE 4

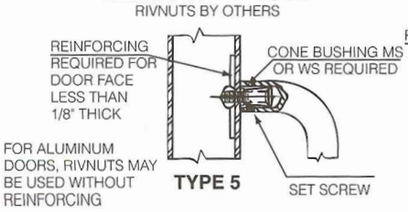

TYPE 5



TYPE 6



TYPE 7



TYPE 8

PH. 1-800-325-9995 or 1-314-772-4400 • Fax 1-800-782-0149 or 1-314-772-0744

rev. 7/02

"THE FIRST FAMILY OF SUPERIOR HARDWARE"

Trim & Auxiliary Push/Pull Plate Details

Standard Grip Positions

Pulls are centered vertically or lowered when necessary to meet minimum top spacing requirement. Be certain pull selected will fit on specified plate under these conditions.

PULL PLATES UP TO 4" WIDE

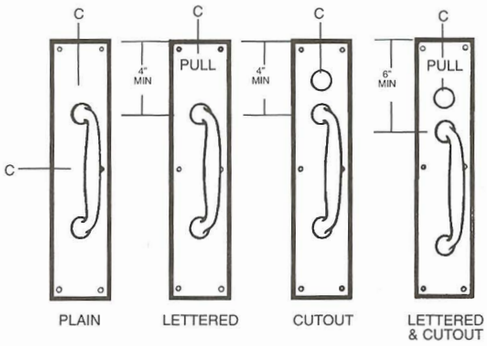

PULL PLATES OVER 4" WIDE

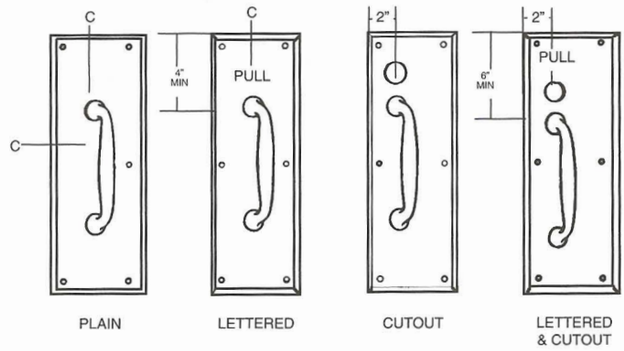

Special Pull Positions

Where pairs of doors are involved and active leaf pull plate is lettered or has a cutout, order pull plate for inactive leaf WOC. This will assure horizontal alignment of pull on both plates.

Always furnish complete details when ordering non standard pull positions.

Cut Outs

Standard cutout sizes: CFC – 1 1/4" (32 mm) diameter; CFT – 3/8" (10 mm) diameter.

All plates may be ordered, with cutout option by adding the appropriate suffix (i.e., 30S-CFC).

Standard cutouts are positioned 2" (51 mm) from top of plate where this option has been ordered. Cutouts a to 4" (102 mm) wide or 2" (51 mm) from edge of plates over 4" (102 mm) wide.
The latter are "handed" with cutouts. Furnish hand of door when ordering.

Provide complete details for all non-standard cutouts.



Flush Back Mounting

Pull plates using #3, 4, or 10 pull types can be furnished with a flush back (no projections). Specify code FB, (i.e. 33 EFB).

NOTE: Use thru-bolts supplied with mountings for best security.



Engraving

Typical engraved lettering is in Helvetica Style and colored black. On push or pull plates, standard position is horizontal on a line 2" (51 mm) from top of plate.

PUSH PULL 3/4"

Push/Pull Plates may be ordered with engraved lettering or special designs. Send a sketch or print with quotation request. Provide complete details for non-standard engraving. Other lettering styles and coloring may be specified subject to availability.

NOTE: Unless specified in product details, all catalog units are reversible-usable with any door swing. However, the method of fastening or engravings usually "hand" an otherwise reversible unit and require the "hand of Door" when ordering.

Trim & Auxiliary Numerical Index

HAGER COMPANIES

Part #	Page
1E	F45
1G	F45
1J	F45
1L	F45
2E	F45
2G	F45
2J	F45
2L	F45
3E	F46
3G	F46
3J	F46
3L	F46
P4E	F44
T4E	F44
4G	F46
4J	F46
4L	F46
5D	F46
5N	F46
6N	F47
7N	F47
P8N	F44
8N	F46
9E	F46
9G	F46
9J	F46
9L	F46
10L	F48
10Q	F48
11E	F48
11G	F48
11J	F48
11L	F48
12G	F48
12J	F48
12L	F48
13E	F46
13G	F46
13J	F46
13L	F46
14G	F46
14J	F46
14L	F46
15C	F49
15N	F49
15P	F49
15S	F49
16N	F49
16R	F49
17N	F50
19N	F50
20N	F50
20L	F48
20Q	F48
21E	F48
21G	F48
21J	F48
21L	F48
22G	F48
22J	F48
22L	F48
22N	F51
23Q	F51
24Q	F49
25C	F49
25N	F49
25P	F51
26N	F52
27N	F52
27P	F52
30S	F7
A30S	F7
31E	F53
31G	F53
31J	F53
31L	F53
32E	F53
32G	F53
32J	F53
32L	F53
33E	F53
33G	F53
33J	F53
33L	F53
34G	F53
34J	F53
34L	F53
35D	F53
A35D	F53
35N	F53
36N	F53
39E	F53
39G	F53
39J	F53
39L	F53
40R	F7
A40R	F7
41E	F53
41G	F53
41J	F53
41L	F53
42E	F53
42G	F53
42J	F53
42L	F53
43E	F53
43G	F53
43J	F53
43L	F53
44G	F53
44J	F53
44L	F53
45D	F53
A45D	F53
45N	F53
46N	F53
49E	F53
49G	F53
49J	F53
49L	F53
50T	F8
A50T	F8
51E	F53
51G	F53
51J	F53
51L	F53
52E	F53
52G	F53
52J	F53
52L	F53
53E	F53
53G	F53
53J	F53
53L	F53
54G	F53
54J	F53
54L	F53
55D	F53
A55D	F53
55N	F53
56N	F53
59E	F53
59G	F53
59J	F53
59L	F53
60S	F8
70S	F8
80S	F8
81E	F53
81G	F53
81J	F53
81L	F53
82E	F53
82G	F53
82J	F53
82L	F53
83E	F53
83G	F53
83J	F53
83L	F53
84G	F53
84J	F53
84L	F53
85D	F53
85N	F53
86N	F53
89E	F53
89G	F53
89J	F53
89L	F53
90R	F9
91E	F53
91G	F53
91J	F53
91L	F53
92E	F53
92G	F53
92J	F53
92L	F53
93E	F53
93G	F53
93J	F53
93L	F53
94G	F53
94J	F53
94L	F53
95D	F53
95N	F53
96N	F53
99E	F53
99G	F53
99J	F53
99L	F53
100T	F9
101E	F53
101G	F53
101J	F53
101L	F53
102E	F53
102G	F53
102J	F53
102L	F53
103E	F53
103G	F53
103J	F53
103L	F53
104G	F53
104J	F53
104L	F53
105D	F53
105N	F53
106N	F53
109E	F53
109G	F53
109J	F53
109L	F53
110S	F9
120L	F54
121L	F54
122L	F54
125S	F55
126S	F55
127S	F55
128P	F56
128S	F56
129S	F56
129P	F56
130S	F57
131S	F57
133S	F57
134S	F57
136S	F57
137S	F57
138P	F57
139P	F57
140P	F57
150D	F58
150B	F58
150V	F58
151D	F58
151B	F58
151V	F58
152D	F58
152B	F58
152V	F58
153D	F59
153B	F59
153V	F59
154D	F59
154B	F59
154V	F59
155D	F59
155B	F59
155V	F59
156D	F59
156B	F59
156V	F59
157D	F59
157B	F59
157V	F59
158D	F59
158B	F59
158V	F59
159D	F60
159B	F60
159V	F60
164D	F60
164B	F60
164V	F60
165D	F60
165B	F60
165V	F60
167D	F61
167B	F61
167V	F61
170D	F61
180H	F10
180K	F10
180M	F10
180P	F10
180Q	F10
181H	F10
181K	F10
181M	F10
181P	F10
181Q	F10
182H	F10
182K	F10
182M	F10
182P	F10
182Q	F10
185G	F10
190S	F11
193S	F11
194S	F11
196R	F10
198S	F11
199B	F11
204S	F11
214S	F11
220S	F11
223S	F11
224S	F11
225S	F11
230W	F12
231W	F12
232W	F12
BL232W	F12
233W	F12
234W	F13
235W	F13
236W	F13
BL236W	F13
237W	F13
241F	F14
BL241F	F14
243F	F14
BL243F	F14
244F	F14
245F	F15
246B	F15
246F	F15
249F	F15
250W	F15
251W	F15
252F	F16
254S	F16
254W	F16
255S	F16
255W	F16
256W	F17
256S	F17
257F	F17
258F	F17
259F	F18
259H	F18
267S	F18
267F	F18
268F	F19
268S	F19
269F	F19
270C	F19
270D	F20
270R	F20
271D	F20
272W	F20
273W	F21
274B	F21
274D	F21
275D	F21
276D	F21
278D	F22
279D	F22
280X	F22
281D	F22
282D	F23
282R	F23
283D	F23
291D	F23
292D	F24
293D	F24
294D	F24
297C	F25
297D	F25
297F	F25
297M	F25
297N	F25
298C	F26
298D	F26
300D	F26
303W	F26
305D	F27
307D	F27
308D	F27
310C	F27
311D	F28
311L	F28
318D	F29
318S	F29
320R	F29
321R	F29
322V	F29
324W	F29
325W	F30
326W	F30
326F	F30
330D	F31
330L	F31
335S	F31
336A	F32
336B	F32
336C	F32
336D	F32
336E	F32
336F	F32
336G	F32
336H	F32
336J	F32
336K	F32
336L	F33
336M	F33
336N	F33
336P	F33
336Q	F33
336R	F33
337A	F33
337B	F33
337C	F33
337D	F33
340D	F34
341D	F34
345D	F34
350M	F38
350W	F38
350H	F38
350L	F38
350R	F38
351H	F39
351L	F39
352M	F39
352W	F39
354A	F39
354B	F39
360M	F40
360W	F40
361H	F40
361L	F40
362H	F40
362L	F40
364L	F41
364M	F41
364N	F41
364S	F41
365M	F41
365W	F41
366R	F42
366S	F42
368E	F42
368M	F43
368W	F43
368U	F43
369L	F43
369R	F43
370M	F44
370W	F44
370U	F44
901P	F35
902P	F35
903P	F35
910P	F63
915P	F63
920P	F64
921P	F64
922P	F64
923P	F64
924P	F65
925P	F65
926P	F65
930P	F66
932P	F67
934P	F67
936P	F35
937P	F35
940P	F35
941P	F35
945P	F36
946P	F36
951P	F36
952P	F36
956P	F36
957P	F36
960P	F68
961P	F68
962P	F68
963P	F69
967P	F69
970P	F69
971P	F69
974P	F69
975P	F70
976P	F70
980P	F71
981P	F71
982P	F71
983P	F72
984P	F72
985P	F72
986P	F73
987P	F73
988P	F74
990P	F74
991P	F75
992P	F75
993P	F76
994P	F76
995P	F77
996P	F77
1442	F37
1443	F37
1755	F37
1756	F37
2630	F78
9882	F78

Square Corner – Beveled

Meets ANSI A156.6 for J301 or J304 Push Plate

30S/A30S

Standard Sizes: 3" x 12" (76 mm x 305 mm), 3 1/2" x 15" (89 mm x 381 mm), 4" x 16" (102 mm x 406 mm), 6" x 16" (152 mm x 406 mm), 8" x 16" (203 mm x 406 mm)
30S Gauge = .050" (1.3 mm)
A30S Gauge = .062" (1.6 mm)

Material: Aluminum, Brass, Bronze, or Stainless Steel
Finishes: All standard, see page F3.
Options: All plates on this page may be ordered cut for cylinder (CFC) or engraved "PUSH" (See page F5 for standard locations).
Order: Provide plate number, size, and finish (i.e., 30S – 3 1/2 x 15" – 32D).

Item No.	Plate Size		Fasteners (tapping screws)	Quantity	
	Inches	mm		Box	Case
30S/A30S	3 x 12	76 x 305	#6 x 5/8 oval undercut head	5 each	50 each
30S/A30S	3-1/2 x 15	89 x 381	#6 x 5/8 oval undercut head	5 each	50 each
30S/A30S	4 x 16	102 x 406	#6 x 5/8 oval undercut head	5 each	50 each
30S/A30S	6 x 16	152 x 406	#6 x 5/8 oval undercut head	—	5 each
30S/A30S	8 x 16	203 x 406	#6 x 5/8 oval undercut head	—	5 each

Radius Corner – Not Beveled

Meets ANSI A156.6 for J301 or J304 Push Plate

40R/A40R

Standard Sizes: 3" x 12" (76 mm x 305 mm), 3 1/2" x 15" (89 mm x 381 mm), 4" x 16" (102 mm x 406 mm), 6" x 16" (152 mm x 406 mm), 8" x 16" (203 mm x 406 mm)
40R Gauge = .050" (1.3 mm)
A40R Gauge = .062" (1.6 mm)

Material: Aluminum, Brass, Bronze, or Stainless Steel
Finishes: All standard, see page F3.
Options: All plates on this page may be ordered cut for cylinder (CFC) or engraved "PUSH" (See page F5 for standard locations).
Order: Provide plate number, size, and finish (i.e., 40R – 3 1/2 x 15" – 32D).

Item No.	Plate Size		Fasteners (tapping screws)	Quantity	
	Inches	mm		Box	Case
40R/A40R	3 x 12	76 x 305	#6 x 5/8 oval undercut head	5 each	50 each
40R/A40R	3-1/2 x 15	89 x 381	#6 x 5/8 oval undercut head	5 each	50 each
40R/A40R	4 x 16	102 x 406	#6 x 5/8 oval undercut head	5 each	50 each
40R/A40R	6 x 16	152 x 406	#6 x 5/8 oval undercut head	—	5 each
40R/A40R	8 x 16	203 x 406	#6 x 5/8 oval undercut head	—	5 each

Round Corner – Not Beveled

Meets ANSI A156.6 for J301 or J304 Push Plate

50T/A50T

Standard Sizes: 3" x 12" (76 mm x 305 mm), 3 1/2" x 15" (89 mm x 381 mm), 4" x 16" (102 mm x 406 mm)
50T Gauge = .050" (1.3 mm)
A50T Gauge = .062" (1.6 mm)

Material: Aluminum, Brass, Bronze, or Stainless Steel
Finishes: All standard, see page F3.
Options: All plates on this page may be ordered cut for cylinder (CFC) or engraved "PUSH" (See page F5 for standard locations).
Order: Provide plate number, size, and finish (i.e., 50T – 3 1/2 x 15" – 32D).

Item No.	Plate Size		Fasteners (tapping screws)	Quantity	
	Inches	mm		Box	Case
50T/A50T	3 x 12	76 x 305	#6 x 5/8 oval undercut head	5 each	50 each
50T/A50T	3-1/2 x 15	89 x 381	#6 x 5/8 oval undercut head	5 each	50 each
50T/A50T	4 x 16	102 x 406	#6 x 5/8 oval undercut head	5 each	50 each

Square Corner – Beveled

Meets ANSI A156.6 for J304 Push Plate

60S

Standard Sizes: 3" x 12" (76 mm x 305 mm), 3 1/2" x 15" (89 mm x 381 mm), 4" x 16" (102 mm x 406 mm), 6" x 16" (152 mm x 406 mm), 8" x 16" (203 mm x 406 mm)

Material: 1/8" (3.2 mm) gauge plastic laminate
Finishes: "PK" = Black, "CO" = Brown, "PG" = Grey
Options: May be ordered cut for cylinder (CFC) (See page F5 for standard locations).
Order: Provide plate number, size, and finish (i.e., 60S – 3 1/2 x 15" – PG).

70S

Material: 1/8" (3.2 mm) gauge clear plastic
Finishes: "CP" = Clear plastic

80S

Material: 1/8" (3.2 mm) gauge Aluminum, Brass, Bronze, or Stainless Steel
Finishes: All standard, see page F3.

Item No.	Plate Size		Fasteners (tapping screws)	Quantity	
	Inches	mm		Box	Case
60/70/80S	3 x 12	76 x 305	#6 x 5/8 oval undercut head	5 each	50 each
60/70/80S	31/2 x 15	89 x 381	#6 x 5/8 oval undercut head	5 each	50 each
60/70/80S	4 x 16	102 x 406	#6 x 5/8 oval undercut head	5 each	50 each
60/70/80S	6 x 16	152 x 406	#6 x 5/8 oval undercut head	—	5 each
60/70/80S	8 x 16	203 x 406	#6 x 5/8 oval undercut head	—	5 each

Door Trim and Auxiliary

Radius Corner – Not Beveled

Meets ANSI A156.6 for J304 Push Plate

90R

Standard Sizes: 3" x 12" (76 mm x 305 mm), 3 1/2" x 15" (89 mm x 381 mm), 4" x 16" (102 mm x 406 mm), 6" x 16" (152 mm x 406 mm), 8" x 16" (203 mm x 406 mm)

Material: 1/8" (3.2 mm) gauge Aluminum, Brass, Bronze, or Stainless Steel
Finishes: All standard, see page F3.
Options: May be ordered cut for cylinder (CFC) or engraved "PUSH" (See page F5 for standard locations).Order: Provide plate number, size, and finish (i.e., 90R – 3 1/2 x 15" – 32D).

Item No.	Plate Size		Fasteners (tapping screws)	Quantity	
	Inches	mm		Box	Case
90R	3 x 12	76 x 305	#6 x 5/8 oval undercut head	5 each	50 each
90R	31/2 x 15	89 x 381	#6 x 5/8 oval undercut head	5 each	50 each
90R	4 x 16	102 x 406	#6 x 5/8 oval undercut head	5 each	50 each
90R	6 x 16	152 x 406	#6 x 5/8 oval undercut head	——	5 each
90R	8 x 16	203 x 406	#6 x 5/8 oval undercut head	——	5 each

Square Corner – Rounded Bevel Top and Bottom

Meets ANSI A156.6 for J304 Push Plate

100T

Standard Sizes: 3" x 12" (76 mm x 305 mm), 3 1/2" x 15" (89 mm x 381 mm), 4" x 16" (102 mm x 406 mm), 6" x 16" (152 mm x 406 mm), 8" x 16" (203 mm x 406 mm)

Material: 1/8" (3.2 mm) gauge Aluminum, Brass, Bronze, or Stainless Steel
Finishes: All standard, see page F3.
Options: May be ordered cut for cylinder (CFC) or engraved "PUSH" (See page F5 for standard locations).Order: Provide plate number, size, and finish (i.e., 100T – 3 1/2 x 15" – 32D).

Item No.	Plate Size		Fasteners (tapping screws)	Quantity	
	Inches	mm		Box	Case
100T	3 x 12	76 x 305	#6 x 5/8 oval undercut head	5 each	50 each
100T	31/2 x 15	89 x 381	#6 x 5/8 oval undercut head	5 each	50 each
100T	4 x 16	102 x 406	#6 x 5/8 oval undercut head	5 each	50 each
100T	6 x 16	152 x 406	#6 x 5/8 oval undercut head	——	5 each
100T	8 x 16	203 x 406	#6 x 5/8 oval undercut head	——	5 each

Half Circle - Push Plate

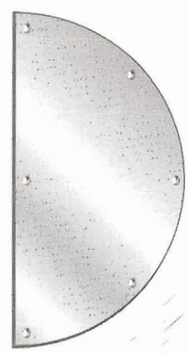

110S

8" x 16" (230 mm x 406 mm) Plate
110S Gauge: 0.050" (1.3 mm)
Material: Aluminum, Brass, Bronze, or Stainless Steel
Finishes: All standard, see page F3.
Options: All plates in this section may be ordered cut for cylinder (CFC) or engraved "PUSH". See page F5 for standard locations.
Note: If engraved or cut for cylinder, supply handing information.
Order: Provide plate number, size, finish (example - 110S - 8" x 16" US32D)

Item No.	Plate Size		Fasteners (tapping screws)	Quantity	
	Inches	mm		Box	Case
110S	8 x 16	203 x 406	#6 x 5/8 oval undercut head	1 each	10 each

Door Trim and Auxiliary

Door Edgings

Meets ANSI A156.6 Door Edging Type J201 through J209

180H/K/M/P/Q – Mortise

Standard Lengths: 40" – 42" (102 mm x 107 mm)
Leg on the Door Edge: 1 3/4" minus 1/32" (44.5 minus .8 mm)

Material: .045 – .050 (1.1 – 1.3 mm) Aluminum or Stainless Steel
Finishes: US28, US32D.
Options: 40"–42" (102–107 cm) standard, other lengths made to order. Furnish details for butt cutouts. Edgings with cut outs are handed.
Order: Provide item number, size, finish, and door thickness (i.e., 180H – 40" – US32D). Provide actual, rather than typical, door thickness.
Note: Holes are staggered along edge of door.

181H/K/M/P/Q – Overlap

Same as 180 series except:
Standard Lengths: 40" – 42" (102 mm x 107 mm)
Leg on the Door Edge: 1 3/4" plus 1/32" (44.5 plus .8 mm)

182H/K/M/P/Q – Non-Mortise

Same as 180 series except:
Standard Lengths: 40" – 42" (102 mm x 107 mm)
Leg on the Door Edge: 1 3/4" plus 1/32" (44.5 plus .8 mm)

Fasteners	Quantity	
	Bag	Case
#6 x 3/4 FH tapping screws	1 each	10 each

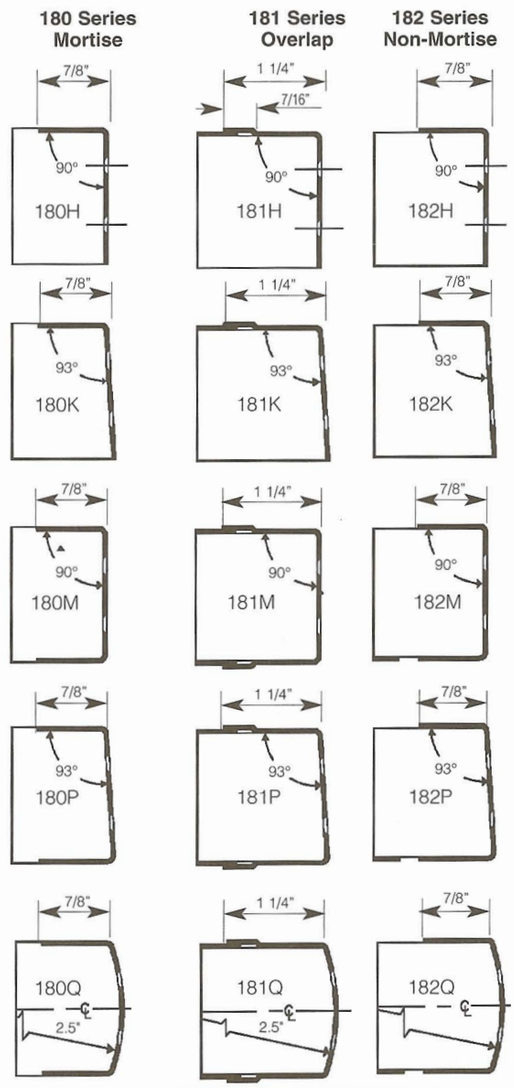

Corner Guard

Meets ANSI A156.6 for J210

185G

Standard Size: 3" x 3" x 40" (76 mm x 76 mm x 1016 mm)

Material: .050 Guage Aluminum or Stainless Steel
Finishes: US28, US32D.
Options: Mounting with double face tape instead of screws.

Fasteners	Quantity	
	Bag	Case
#6 x 5/8 truss head screws	1 each	10 each



rev. 7/02

"THE FIRST FAMILY OF SUPERIOR HARDWARE"

Door Trim and Auxiliary

Door Protection Plate

Meets ANSI A156.6 J101 Metal Armor Plate; J102 Metal Kickplate; J103 Metal Mop Plate.

190S, 193S, 194S

Mop Plate: 4" (102 mm) and 6" (152 mm) high, 1" (25 mm) less than door width
Kick Plate: 8" (203 mm), 10" (254 mm), and 12" (305 mm) high, 2" (51 mm) less than door width
Armor Plate: 14" (356 mm) to 48" (1219 mm) high
.050" (1.3 mm) Gauge Metal

Material: Aluminum, Brass, Bronze, or Stainless Steel (301 grade Stainless Steel)
Finishes: All standard, see page F3. (Note: US3 plates are not recommended for exterior application)
Options: May be ordered with counter sunk holes (specify "CSK") at extra charge.
Order: Furnish item number, height, width, and finish (i.e., 190S – 6" x 30", US32D).
Plates are sized on even inches. Odd size available and priced to next larger size.



Stretcher Plate

198S

.038" (0.8 mm) Gauge Stainless Steel

Material: Stainless Steel only.
Finishes: US32D.

199B

.038" (0.8 mm) Gauge Gold Anodized Aluminum

Material: Gold Anodized Aluminum only.



Mop Plate

220S, 223S, 224S

.062" (1.6 mm) Gauge Metal

Material: Aluminum, Brass, Bronze, or Stainless Steel
Finishes: All standard, see page F3. (Note: US3 plates are not recommended for exterior application)

Item No.	US Gauge	Bevel	Fasteners	Quantity Bag
190S	18	none	#6 x 5/8 truss head screws	1 each
193S	18	B3E	#6 x 5/8 truss head screws	1 each
194S	18	B4E	#6 x 5/8 truss head screws	1 each
198S	20	none	#6 x 5/8 truss head screws	1 each
199B	38	none	#6 x 5/8 truss head screws	1 each
220S	16	none	#6 x 5/8 truss head screws	1 each
223S	16	B3E	#6 x 5/8 truss head screws	1 each
224S	16	B4E	#6 x 5/8 truss head screws	1 each



Kick Plate

Door Protection Plate

Meets ANSI A156.6 J105 Plastic Armor Plate; J106 Plastic Kickplate; J107 Plastic Mop Plate.

204S

Mop Plate: 4" (102 mm) and 6" (152 mm) high, 1" (25 mm) less than door width
Kick Plate: 8" (203 mm), 10" (254 mm), and 12" (305 mm) high, 2" (51 mm) less than door width
Armor Plate: 14" (356 mm) to 48" (1219 mm) high
.125" (3.2 mm) Gauge Clear Plastic

Material: Clear plastic.
Finishes: Clear (specify "PC").
Options: May be ordered with counter sunk holes (specify "CSK") at extra charge.
Order: Furnish item number, height, width, and finish (i.e., 204S – 6" x 30", PC).
Plates are sized on even inches. Odd size available and priced to next larger size.



Armor Plate

214S

.125" (3.2 mm) Gauge Plastic Laminate

Material: Plastic laminate.
Finishes: Black (specify "PK"), Brown (specify "CO"), Grey ("PG").
Color selection for other than standard colors, are subject to minimum order quantity, priced on application.

225S

.081" (2.1 mm) Gauge Kydex®

Material: Kydex®.
Finishes Color selection for other than standard colors, are subject to minimum order quantity, priced on application.

Item No.	US Gauge	Bevel	Fasteners	Quantity Bag
204S	—	B4E	#6 x 5/8 truss head screws	1 each
214S	—	B4E	#6 x 5/8 truss head screws	1 each
225S	—	none	#6 x 5/8 truss head screws	1 each

Convex Wall Stop with Concealed Mounting

Meets ANSI A156.16 for L02101



230W

2 7/16" (62 mm) Diameter
13/16" (30 mm) Projection

Material: Cast Brass, Bronze with rubber bumper.
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D in stock.
Other finishes on special order, priced on application.

Fasteners	Quantity	
	Bag	Case
#10 x 1-1/4 screws, shield, Toggler®	10 each	100 each

231W

Same as 230W except:

Fasteners	Quantity	
	Bag	Case
#10 x 1-1/4 screws, 10/24 x 2-1/2 MS, and toggle nut	10 each	100 each

Convex Wall Stop with Concealed Mounting

Meets ANSI A156.16 for L02101

232W

2 1/2" (64 mm) Diameter
13/16" (30 mm) Projection

Material: Wrought Brass, Bronze, and Stainless Steel with rubber bumper.
Finishes: US3, US4, US5, US9, US10, US10B, US15A, US19, US26, US26D, US32 and US32D in stock.
Other finishes on special order, priced on application.

Fasteners	Quantity	
	Bag	Case
#10 x 1-1/4 screws, shield, Toggler®	10 each	100 each

BL232W

Same as 232W except:

Fasteners	Quantity	
	Bag	Case
#10 x 1-1/4 screws, shield, Toggler®	——	50 each

233W

Same as 232W except:

Fasteners	Quantity	
	Bag	Case
#10 x 1-1/4 screws, 10/24 x 2-1/2 MS, and toggle nut	10 each	100 each

Concave Wall Stop with Concealed Mounting

Meets ANSI A156.16 for L02251

234W

2 7/16" (62 mm) Diameter
13/16" (30 mm) Projection

Material: Cast Brass, Bronze with rubber bumper.
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D.
Other finishes on special order, priced on application.

Fasteners	Quantity	
	Box	Case
#10 x 1-1/4 screws, shield, Toggler®	10 each	100 each

235W

Same as 234W except:

Fasteners	Quantity	
	Box	Case
#10 x 1-1/4 screws, 10/24 x 2-1/2 MS, and toggle nut	10 each	100 each

Concave Wall Stop with Concealed Mounting

Meets ANSI A156.16 for L02251

236W

2 1/2" (64 mm) Diameter
13/16" (30 mm) Projection

Material: Wrought Brass, Bronze, and Stainless Steel with rubber bumper.
Finishes: US3, US4, US5, US9, US10, US10B, US15A, US19, US26, US26D, US32 and US32D in stock.
Other finishes on special order, priced on application.

Fasteners	Quantity	
	Box	Case
#10 x 1-1/4 screws, shield, Toggler®	10 each	100 each

BL236W

Same as 236W except:

Fasteners	Quantity	
	Box	Case
#10 x 1-1/4 screws, shield, Toggler®	—	50 each

237W

Same as 236W except:

Fasteners	Quantity	
	Box	Case
#10 x 11/4 screws, 10/24 x 2-1/2 MS, and toggle nut	10 each	100 each

Door Trim and Auxiliary

Dome Stop – Low

Meets ANSI A156.16 for L02141

241F

1 3/4" (45 mm) Diameter
1/8" (3.2 mm) thick Base

Material: Die Cast Brass
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D only.
Options: May be ordered with machine screws and Tampin shield.



Fasteners	Quantity	
	Box	Case
#10 x 1-1/4 screws, Tampin shield	10 each	100 each

BL241F

Same as 241F except:

Fasteners	Quantity	
	Box	Case
#10 x 1-1/4 screws, Tampin shield	——	50 each

Dome Stop – High

Meets ANSI A156.16 for L02161

243F

1 3/4" (45 mm) Diameter
3/8" (12.5 mm) thick Base

Material: Die Cast Brass
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D only.
Options: May be ordered with machine screws and Tampin shield.



Fasteners	Quantity	
	Box	Case
#10 x 1-1/2 screws, shield	10 each	100 each

BL243F

Same as 243F except:

Fasteners	Quantity	
	Box	Case
#10 x 1-1/2 screws, shield	——	50 each

Cast Floor Stop

244F

1 11/16" x 4" (43 mm x 102 mm) Base
3/16" (4.8 mm) thick Base
1" (25 mm) Overall Height

Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.

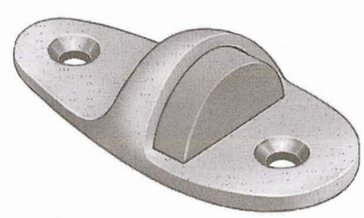

Fasteners	Quantity	
	Box	Case
machine screws, lead anchors	5 each	50 each

Door Trim and Auxiliary

Cast Floor Stop

245F

2" x 4" (51 mm x 102 mm) Base
1/2" (12.5 mm) thick Base
15/16" (33 mm) Overall Height

Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.



Fasteners	Quantity	
	Box	Case
machine screws, lead anchors	5 each	50 each

Dome Stop Riser Plate

For use with 241F and 243F on carpeted floors.

246B

1 3/4" (45 mm) Diameter
3/8" (10 mm) thick Base

Material: Cast Brass
Finishes: Mill, US3, US4, US10, US10B, US15A, US19, US26, US26D.

Quantity	
Bag	Case
10 each	100 each

L-Shaped Floor Stop

249F

1" x 2 5/8" (25 mm x 67 mm) Base
1/4" (7 mm) thick Base
2 3/4" (70 mm) Overall Height

Material: Burnished Wrought Steel
Stop face: Resilient Black Rubber
Finishes: US2C only.

Fasteners	Quantity	
	Box	Case
wood screws w/plastic anchors #10 x 1 1/4"	5 each	50 each

Convex Wall Stop with Concealed Mounting

250W

1" (25 mm) Diameter
1/2" (13 mm) Projection

Material: Wrought Brass
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
#6 x 5/8 screws, shield	20 each	200 each

Concave Wall Stop with Concealed Mounting

251W

1 7/8" (48 mm) Diameter
3/4" (19 mm) Projection

Material: Adhesive Backed Rubber Bumper
Finishes: Grey.

Fasteners	Quantity	
	Box	Case
none (adhesive backed)	20 each	200 each

Door Trim and Auxiliary

Cast Floor Stop
Meets ANSI A156.16 for L02131

252F
1 1/2" x 2 1/2" (38 mm x 64 mm) Base
2 11/16" (68 mm) Height

Material: Forged Brass
Finishes: US3, US10, US10B, US15A, US19, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
1-1/4"-20 x 3/4" MS, 1-1/4"-20 x 2" Lag bolts & anchor	5 each	50 each

Cast Wall Stop and Holder
Meets ANSI A156.16 for L01351

254W
2 3/8" (60 mm) Diameter Base
3 3/8" (86 mm) Projection
1" x 2" (25 mm x 51 mm) Keeper

Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
5/16" threaded stud & anchor, wood screw & anchor	5 each	50 each

254S
Same as 254W except:

Fasteners	Quantity	
	Box	Case
#10 OH tapping screws(surface screw mounting)	5 each	50 each

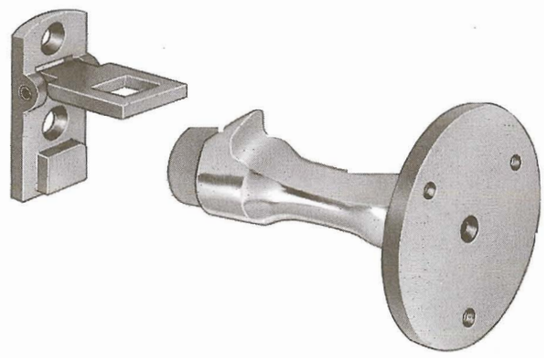

Cast Wall Stop
Meets ANSI A156.16 for L02021

255W
2 7/16" (62 mm) Diameter Base
3 5/8" (92 mm) Projection

Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
5/16" threaded stud & anchor, wood screw & anchor	5 each	50 each

255S
Meets ANSI A156.16 for L02011
Same as 255W except:

Fasteners	Quantity	
	Box	Case
#10 OH tapping screws(surface screw mounting)	5 each	50 each

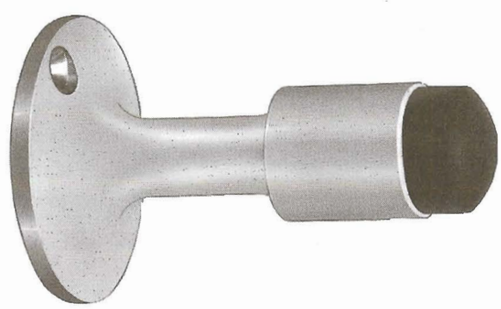

Door Trim and Auxiliary

Cast Wall Stop and Holder

Meets ANSI A156.16 for L01351

256W

2 1/4" (57 mm) Diameter Base
3 13/16" (97 mm) Projection
13/16" x 1 1/2" (21 mm x 38 mm) Keeper

Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
5/16" threaded stud & anchor, wood screw & anchor	5 each	50 each

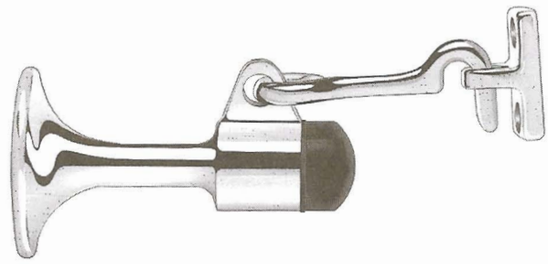

256S

Meets ANSI A156.16 for L01341

Same as 256W except:

Fasteners	Quantity	
	Box	Case
#10 OH tapping screws(surface screw mounting)	5 each	50 each

Cast Floor Stop

Meets ANSI A156.16 for L02181

257F

1 1/2" x 2 7/16" (38 mm x 62 mm) Base
2" (51 mm) Height

Material: Forged Brass
Finishes: US3, US10, US10B,US15A, US19, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
1-1/4"-20 x 3/4" MS, 1-1/4"-20 x 2" Lag bolts & anchor	5 each	50 each

Cast Floor Stop and Holder

Meets ANSI A156.16 for L01371

258F

1 9/16" x 2 5/8" (40 mm x 67 mm) Base
2 7/8" (73 mm) Height
1" x 2" (25 mm x 51 mm) Keeper

Material: Forged Brass
Finishes: US3, US10, US10B, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
11/4"-20 x 3/4" MS, 11/4"-20 x 2" Lag bolts & anchor	5 each	50 each

HAGER COMPANIES

Tri Base Floor Stop

259F

2 9/16" (65 mm) Width of Base
1 3/4" (45 mm) Depth of Base
1 11/16" (43 mm) Overall Height

Material: Cast Brass with black rubber bumper.
Finishes: US3, US10, US10B, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
10/24 x 3/4" FHMS, and tappin lead shields	5 each	50 each

Tri Base Floor Stop

259H

2 5/8" (67 mm) Width of Base
1 3/4" (45 mm) Depth of Base
2 1/4" (57 mm) Overall Height

Material: Cast Brass with black rubber bumper.
Finishes: US3, US10, US10B, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
10/24 x 3/4" FHMS, and tappin lead shields	5 each	50 each

Cast Floor Stop

Meets ANSI A156.16 for L02131

267F

2 7/16" (62 mm) Diameter Base
3" (76 mm) Height

Material: Cast Brass
Finishes: US3, US10, US10B, US19, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
5/16" threaded stud & anchor, wood screw & anchor	5 each	50 each

267S

Meets ANSI A156.16 for L02121
Same as 267F except:

Fasteners	Quantity	
	Box	Case
#10 OH tapping screws(surface screw mounting)	5 each	50 each

"THE FIRST FAMILY OF SUPERIOR HARDWARE"

Door Trim and Auxiliary

Cast Floor Stop and Holder

Meets ANSI A156.16 for L01371

268F

2 1/4" (57 mm) Diameter Base
3 5/16" (84 mm) Projection
13/16" x 1 1/2" (21 mm x 38 mm) Keeper

Material: Cast Brass
Finishes: US3, US10, US10B, US15A, US19, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
5/16" threaded stud & anchor, wood screw & anchor	5 each	50 each

268S

Meets ANSI A156.16 for L01361
Same as 268F except:

Fasteners	Quantity	
	Box	Case
#10 OH tapping screws(surface screw mounting)	5 each	50 each

Heavy Duty Floor Stop

Exceeds the criteria set forth for a 300 pound impact test (Report #91-04-01646)

269F

2" (51 mm) Bumper Diameter
1 3/4" (45 mm) Bumper Height
5/8"-11 x 4"steel bolt

Material: 70 durometer, fire resistant bumper.
Finishes: US2C, US4 only.
Installation requires 1" (25 mm) round x 2 1/2" (64 mm) deep hole in floor & attachment with special grout by others.

Quantity	
Box	Case
5 each	50 each



Cast Door Holder

Meets ANSI A156.16 for L71382

270C

1 7/16" x 2 1/8" (37 mm x 54 mm) Base
4 1/8" (105 mm) Arm

Material: Cast Iron
Finishes: S1 (ALUM), S2 (BRASS), and S3 (BRONZE) only.

Fasteners	Quantity	
	Box	Case
#8 x 3/4" FH tapping screws	5 each	50 each

Door Trim and Auxiliary

Cast Door Holder
Meets ANSI A156.16 for L01381

270D
1 5/8" x 1 3/4" (41 mm x 45 mm) Base
3 7/8" (98 mm) Arm
Material: Cast Brass
Finishes: US3, US10, US10B, US15A, US19, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
#6 x 1" OHWS	5 each	50 each

Replacement Rubber Tip
For use with Hager #270D and 271D Door Holders

270R
Material: Rubber

Quantity	
Box	Case
10 each	100 each



Cast Door Holder
Meets ANSI A156.16 for L01381

271D
1 5/8" x 1 3/4" (41 mm x 45 mm) Base
4 3/4" (121 mm) Arm
Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.

Fasteners	Quantity	
	Box	Case
#6 x 1" OHWS	5 each	50 each

Roller Bumper
Meets ANSI A156.16 for L02201

272W
2" (51 mm) Diameter Base
6 3/8" (162 mm) Projection
Material: Cast Brass or Bronze
Finishes: All standard, see page F3.

Fasteners	Quantity	
	Box	Case
#8 FHWS	10 each	100 each

"THE FIRST FAMILY OF SUPERIOR HARDWARE"

Door Trim and Auxiliary

Curved Roller Bumper
Meets ANSI A156.16 for L12211

273W
2 5/8" (67 mm) Projection

Material: Cast Brass with solid rubber roller
Finishes: US3, US4, US10, US10B, US26, and US26D only.
For use where two doors contact at odd angles.

Fasteners	Quantity	
	Box	Case
#10 x 1" FH Sheet Metal Screws	5 each	50 each

Door Guard Protective Plate
To be used with the 274D.

274B
Material: Cast brass
Finishes: US3, US4, US10, US10B, US26, and US26D only.
Used when additional protective plate is required for frame application.
Mounted with double back tape.



Shim for Door Guard Protective Plate
To be used with the 274D.

274C
Material: Resilient Black Rubber, 3/16" thick.
Packaging as Required



Door Guard
Meets ANSI A156.16 for L13041

274D
4 3/4" (121 mm) Arm Length

Material: Cast brass
Finishes: US3, US4, US10, US10B, US26, and US26D only.
Includes: Door protection plate.
Door guard permits door to be opened slightly while maintaining security.
Protective plate mounted to door with double back tape.

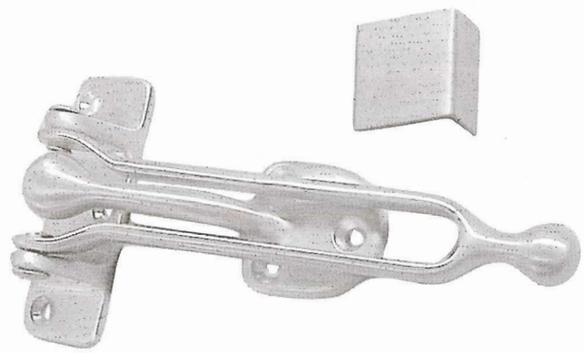

Fasteners	Quantity	
	Box	Case
#6 x 3/4" FH Sheet Metal Screws #6 x 1-1/2 Wood Screws #6 x 3/4 Wood Screws	5 each	50 each

Surface Bolt
Meets ANSI A156.16 for L04161 or L84161

275D
8" (203 mm) Bolt Length
1/4" x 3/4" (6 mm x 19 mm) Bolt Height x Width
1" (25 mm) Bolt Throw

Material: Steel
Finishes: US26D; Others on special order.
Universal and Angle strikes included.

276D
Same as 275D except:
12" (305 mm) Bolt Length

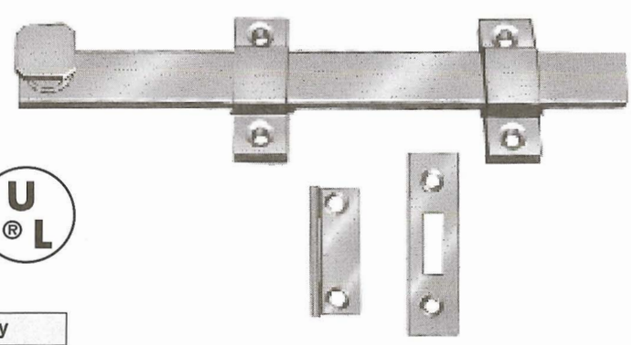

Fasteners	Quantity	
	Box	Case
#10-24 x 1" FHMS and #10-1 1/4" FHWS	1 each	12 each

Door Trim and Auxiliary

Surface Bolt

Meets ANSI A156.16 for L04151

278D-6

6" (152 mm) Bolt Length
1/2" (12.5 mm) Bolt Width
1 5/16" (24 mm) Bolt Throw
1 1/16" (17 mm) Base Width
1/2" (12.5 mm) Diameter of Knob
1 1/16" (17 mm) Surface Bolt Projection

Material: Brass
Finishes: US3, and US26D only.
Mortise and Universal strikes included.

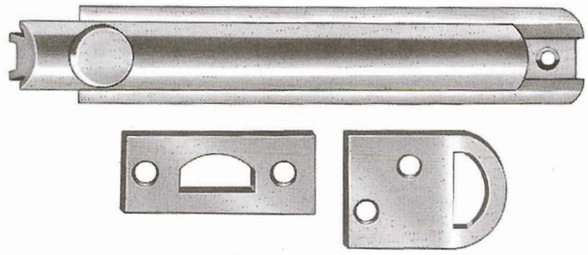

Quantity	
Box	Case
10 each	100 each

Surface Bolt for Dutch Doors

279D

1 5/8 x 4 3/8" (41 mm x 111 mm) Bolt Overall Size
5/8" (16 mm) Half Round Bolt Size
9/16" (14 mm) Bolt Throw

Material: Brass
Finishes: US3, and US26D only.
Mortise and Universal strikes included.

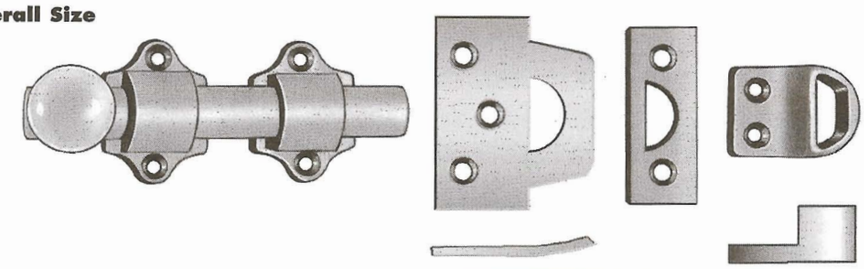

Quantity	
Box	Case
10 each	100 each

Dust Proof Strike

Meets ANSI A156.16 for L04021

280X

1 3/8" x 2 7/8" (35 mm x 73 mm) Face Plate
1" (25 mm) Diameter Barrel
2 3/16" (56 mm) Depth

Material: Cast Brass
Finishes: US3, US4, US10, US15A, US19, US26, and US26D only.
May be used with carpet or threshold application by omitting face plate.
Packed unassembled with plate, strike, fasteners, and spanner wrench.

Fasteners	Quantity	
	Box	Case
#8 x 1 wood screws and anchors	10 each	100 each

Slide Flush Bolt

Meets ANSI A156.16 for L04201

281D

3/4" x 6" (19 mm x 152 mm) Face
1/2" (12.5 mm) Bolt Head
7/8" x 1 3/4" (22 mm x 45 mm) Strike

Material: Brass
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D only.



Fasteners	Quantity	
	Box	Case
#6 FHWS	10 each	100 each

"THE FIRST FAMILY OF SUPERIOR HARDWARE"

Door Trim and Auxiliary

Lever Extension Flush Bolt

For use on hollow metal/fire rated doors

Meets ANSI A156.16 for L04251

282D

1" x 6 3/4" (25 mm x 172 mm) Face
1/2" (12.5 mm) Flattened Round Bolt Head
3/4" (19 mm) Bolt Throw
12" (305mm) Rod Length (center of face to corner of door)
3/4" (19 mm) Rod Backset
1" x 2" (25 mm x 51 mm) Guide
15/16" x 2 /4" (24 mm x 57 mm) Strike

Material: Extruded Brass
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D only.
Options: Standard rod length 12" (305 mm). 18" (457 mm), 25" (635 mm), and 30" (762 mm) available. I other lengths, specify "282R". Bolt head not included.

Fasteners	Quantity	
	Box	Case
#8 combination screws	2 each	80 each

File #
R13676 (N)

282D
Fits ANSI A115
door and frame prep.

Rod 1/4" Dia.
1/4 - 20 Thread

282R

Lever Extension Flush Bolt

For use on wood composite/fire rated doors

Meets ANSI A156.16 for L04251

283D

1" x 6 3/4" (25 mm x 172 mm) Face
1/2" (12.5 mm) Flattened Round Bolt Head
3/4" (19 mm) Bolt Throw
3/4" (19 mm) Rod Backset
15/16" x 2 1/4" (24 mm x 57 mm) Strike

Material: Extruded Brass
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D only.
For use on wood composite doors.

Fasteners	Quantity	
	Box	Case
#8 combination screws	1 each	80 each

File #
R13676 (N)

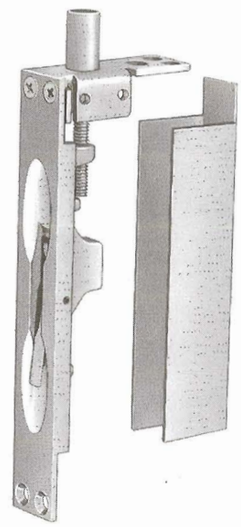

Automatic Flush Bolt Set for Wood Covered Composite Doors

B, C, D, and E Label.
Type #25 ANSI A156.3

291D

1" x 8 1/2" (25 mm x 216 mm) Face Plate

Finishes: US3, US4, US10, US10B, US26, and US26D only.
Thermal Lock: Automatically locks inactive door under high fire/heat conditions.
Used in pairs at top and bottom of inactive door. Fully automatic, when active door is opened, inactive door is free.
Note: 280X Dust Proof Strikes (p. F22) are recommended for use with these sets.
May be used on doors 4 ft. wide and 9 ft. high.

Fasteners	Quantity	
	Box	Case
2 bolts per set, #8 x 3/4" tapping screws	1 set	10 sets

File #
R7912 (N)

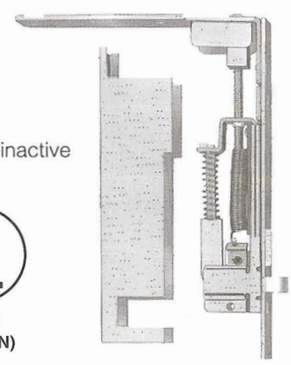

Door Trim and Auxiliary

Automatic Flush Bolt Set for Metal Doors

A, B, C, D, and E Label.
Type #25 ANSI A156.3

292D

1" x 6 3/4" (25 mm x 172 mm) Face Plate

Finishes: US3, US4, US10, US10B, US26, and US26D only.
Thermal Lock: Automatically locks inactive door under high fire/heat conditions.
Used in pairs at top and bottom of inactive door. Fully automatic, when active door is opened, inactive door is free.
Note: 280X Dust Proof Strikes (p. 42Y) are recommended for use with these sets.
May be used on doors 4 ft. wide and 9 ft. high.

File #
R7912 (N)

Fasteners	Quantity	
	Box	Case
2 bolts per set, #8 x 3/4" tapping screws	1 set	10 sets

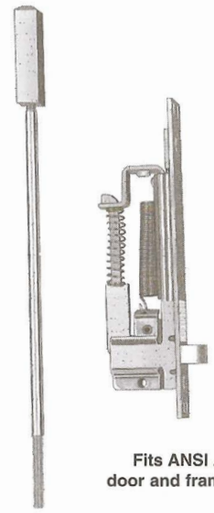

Fits ANSI A115
door and frame prep.

Self Latching Bolt Set for Inactive Metal Doors

A, B, C, D, and E Label.
Type #27 ANSI A156.3

293D

1" x 6 3/4" (25 mm x 172 mm) Face Plate

Finishes: US26D in stock. Other finishes available on special order.
One set consists of one constant latching bolt, one automatic bolt, one ANSI lip strike, and fasteners.
When inactive door closes, bolt is automatically latched. To unlatch, depress plunger "A".
Constant latching bolt is used at top of door only, an automatic flush bolt is included for bottom of door.
Note: 280X Dust Proof Strikes (p. 42Y) are recommended for use with these sets.
May be used on doors 4 ft. wide and 9 ft. high.

File #
R7912 (N)

Fasteners	Quantity	
	Box	Case
#8 x 1" tapping screws	1 set	10 sets

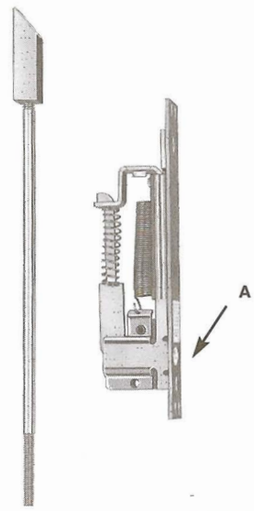

Self Latching Bolt Set for Inactive Wood Covered Composite Doors

B, C, D, and E Label.
Type #27 ANSI A156.3

294D

1" x 8 1/2" (25 mm x 216 mm) Face Plate

Finishes: US26D in stock. Other finishes available on special order.
One set consists of one constant latching bolt, one automatic bolt, one ANSI lip strike, and fasteners.
When inactive door closes, bolt is automatically latched. To unlatch, depress plunger "A".
Constant latching bolt is used at top of door only, an automatic flush bolt is included for bottom of door.
Note: 280X Dust Proof Strikes (p. 42Y) are recommended for use with these sets.
May be used on doors 4 ft. wide and 9 ft. high.

File #
R7912 (N)

Fasteners	Quantity	
	Box	Case
#8 x 1" tapping screws	1 set	10 sets

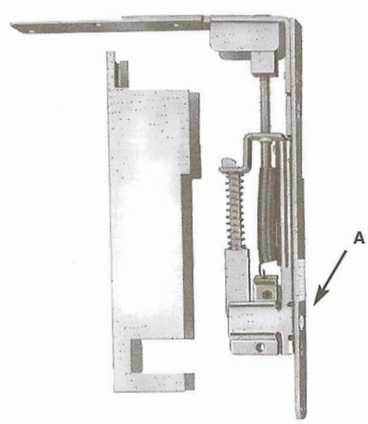

Door Trim and Auxiliary

Carry Bar for 297D and 298D Coordinators

For use on pair of doors with astragal

297C

1 3/4" x 2 1/4" (45 mm x 57 mm) Plate

Material: Wrought Steel
Finishes: Black prime coat, US3, US10, US10B, US26, US26D
Fasteners included.

Quantity	
Box	Case
2 each	20 each

Coordinating Device

For use with frame openings 60" (152 cm), 72" (183 cm), or 96" (244 cm).
Type #21 ANSI A156.3

297D

Material: Steel
Finishes: Black prime coat
Standard Widths: For frame openings 60" (152 mm), 72" (183 mm), or 96" (244 mm). Specify width when ordering.
Coordinator consists of operating device with filler piece to fit jamb opening.

Fasteners	Quantity	
	Box	Case
#10 x 1-1/2" OHMS	1 each	4 each

UL
File # R10849 (N)

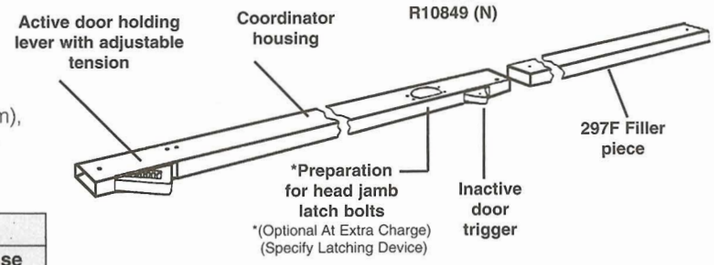

Filler Plates for 297D Coordinator

297F

Stop Dimension 5/8" (16 mm)
Available size: 18 5/8" x 42 5/8" only.

Mounting Brackets for 297D Coordinator

297N

4 1/4" (108 mm) Jamb Depth
5/8" (16 mm) Stop Height
For Stop Width Greater Than 2 1/4" (57 mm)
Finishes: Black prime coat

297N

297M

Same as 297N except:
4 3/4" (121 mm) Jamb Depth
5/8" (16 mm) Stop Height
For Stop Width 7/8" to 2 1/4" (22 to 57 mm)

Quantity	
Box	Case
2 each	20 each

297M

Door Trim and Auxiliary

Carry Bar for 298D Coordinator

For use on pair of doors with astragal

298C

1 1/4" x 2 3/4" (32 [illegible]) Plate

Material: Cast Bra[illegible]
Finishes: US3 [illegible] US10B, and US26D only.
Fasteners i[illegible]

DISCONTINUED

Quantity	
Box	Case
5 each	50 each



Coordinating Device

Type #21 ANSI A156.3

298D

5 1/2" x 1 1/8" (140 mm x 29 mm) Plate

Material: Cast Brass
Finishes: US3, US10, US10B, and US26D only.
Fasteners included.

Quantity	
Box	Case
1 each	10 each



UL
File #
R10849 (N)

Chain Door Check

Meets ANSI A156.16 for L02231

300D

1 1/2" x 1 1/2" (38 mm x 38 mm) Base Plate
27" (686 mm) Overall Length (also available in 25 1/2" (648 mm), 30 1/2" (800 mm))

Material: Cast brass base plate, welded steel chain, cloth backed leatherette cover.
Finishes US26D only.
Options: Through door mounting with grommet nut sets at extra charge.
Welded steel twist type chain with heavy compression spring at end of chain.

Fasteners	Quantity	
	Box	Case
#10 x 1" OHWS	5 each	50 each

Handrail Bracket

Meets ANSI A156.16 for L03101

303W

3 1/8" (79 mm) Diameter Base
2 3/4" (70 mm) from Base to Center of Rail

Material: Cast Brass
Finishes: All standard, see page F3.

Fasteners	Quantity	
	Box	Case
#10 x 11/2" OHWS	5 each	50 each



Door Trim and Auxiliary

3" (76 mm) Wire Pull

Meets ANSI A156.9 for B02011

305D - 3"

5/16" (7.9 mm) Diameter of Rod
1 1/4" (32 mm) Projection
3" (76 mm) CTC

Material: Solid Brass
Finish: US3, US26, and US26D.

305D - 3-1/2"

Same as 305D except:
3 1/2" (89 mm) CTC

305D - 4"

Same as 305D except:
4" (102 mm) CTC

Fasteners	Quantity	
	Box	Case
8/32" x 1" combination truss head MS	10 each	100 each

Door Silencer

For use with metal frames. Meets ANSI A156.16 for L03011

307D

1/2" (12.5 mm) Diameter Base
1 1/16" (27 mm) Length

Material: Rubber



Quantity	
Box	Case
1 each	100 each

Door Silencer

For use with wood frames. Meets ANSI A156.16 for L03021

308D

3/8" x 3/4" (9.5 mm x 19 mm) Base
3/4" (19 mm) Length

Material: Rubber



Quantity	
Box	Case
1 each	100 each

Conversion Kit

Change door from Roller Latch to Push/Pull Latch.

310C

1 1/8" x 3 3/8" (29 mm x 86 mm) Filler Plate
1 11/16" x 2 1/4" (43 mm x 57 mm) Strike

Packed with filler plate, strike, and fasteners.

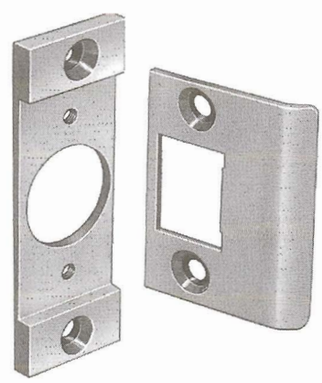

Quantity	
Box	Case
5 each	50 each

Roller Latch with Tee Strike

Meets ANSI A156.16 for E09091

318D

1" x 3 3/8" (25 mm x 86 mm) Latch Face
1 1/8" x 2 3/4" (29 mm x 70 mm) Strike Size
.060" (1.5 mm) Gauge Wrought Metal Strike

Material: Forged Brass
Finishes: US3, US10, US10B, US15A, US19, US26, and US26D only.
* Adjustable Spring Tension.

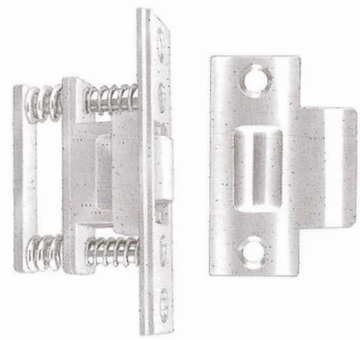

Fasteners	Quantity	
	Box	Case
#8 x 1" FHWS, #8 OH Tapping screws	1 each	50 each

Roller Latch with Stop

Meets ANSI A156.16 for E09111

318S

1 1/2" x 4 1/2" (38 mm x 114 mm) Latch Face
5/8" x 4 1/2" (16 mm x 114 mm) Angle Stop
1 1/8" x 2 1/4" (29 mm x 57 mm) Strike Size
Wrought Metal Strike

Material: Forged Brass
Finishes: US10B, and US26D only.
Silencers integral with latch. Mounts in header with strike in top of door.
* Adjustable Spring Tension.

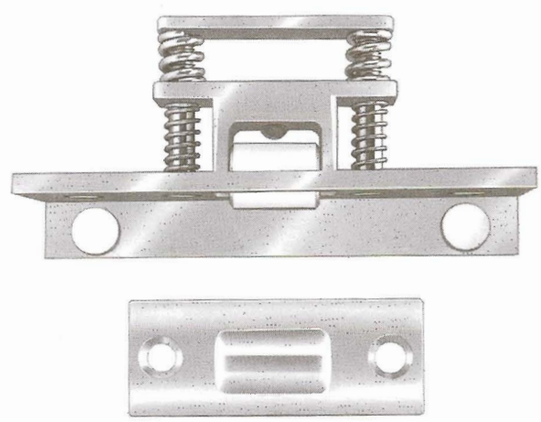

Fasteners	Quantity	
	Box	Case
#8 FHMS, #8 OH Tapping screws	1 each	50 each

Door Trim and Auxiliary

Roller Catch with Strike

320R

2 1/4" x 1 1/8" (57 mm x 29 mm) Latch Face
1 1/8" x 2 3/4" (29 mm x 70 mm) Strike Size
.050" (1.3 mm) Gauge Wrought Metal Strike

Material: Cast Brass with Nylon Roller
Finishes: US3, US4, US9, US10, US10B, US26, and US26D only.
Note: Latch position shown.
* Adjustable Spring Tension.

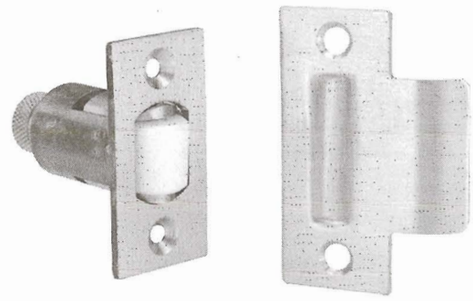

Quantity	
Box	Case
1 each	50 each

Adjustable Ball Catch with Strike

321R

1" x 2 1/8" (25 mm x 54 mm) Latch Face
1 3/8" x 2 1/8" (35 mm x 54 mm) Strike Size
.050" (1.3 mm) Gauge Wrought Metal Strike

Material: Cast Brass with Steel Ball
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D.
Note: Head mount position shown.
* Adjustable Spring Tension.

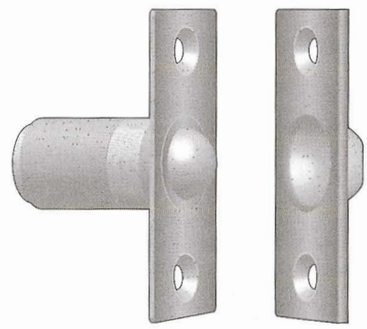

Quantity	
Box	Case
1 each	50 each

Wrought Door Knocker

Meets ANSI A156.16 for L03161

322V

2 3/16" x 3 1/4" (56 mm x 83 mm) Size

Material: Wrought Brass
Finish: US3, US4, US10, and US26D.
Requires 1/2" hole for viewer.



Fasteners	Quantity	
	Box	Case
#6 x 5/8" truss HD screws	1 each	10 each

Light Duty Wall Bumper

Meets ANSI A156.16 for L02031

324W

7/8" (22 mm) Diameter Base
3 1/4" (83 mm) Projection

Material: Brass, Bronze
Finishes: US3, US4, US5, US10, US10B, US15A, US19, US26, and US26D.
Replaceable rubber tip.

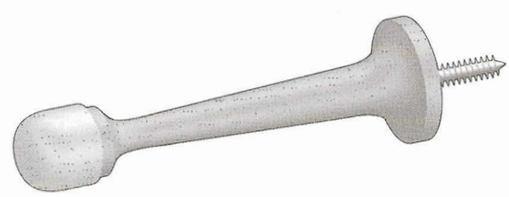

Fasteners	Quantity	
	Box	Case
3/4" x 3/16" wood screw thread	10 each	100 each

Door Trim and Auxiliary

Cast Wall Type Holder

Meets ANSI A156.16 for L01291

326W

2 3/4" x 2 7/16" (70 mm x 62 mm) Holder Base
2 1/4" (57 mm) Holder Projection
3 1/2" (89 mm) Overall Projection (Wall to Door)
1" x 2" (25 mm x 51 mm) Keeper
2" (51 mm) Keeper Height

Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.
For use with wood or hollow metal doors.
Wall to door clearance 3 1/2" (89 mm) maximum.

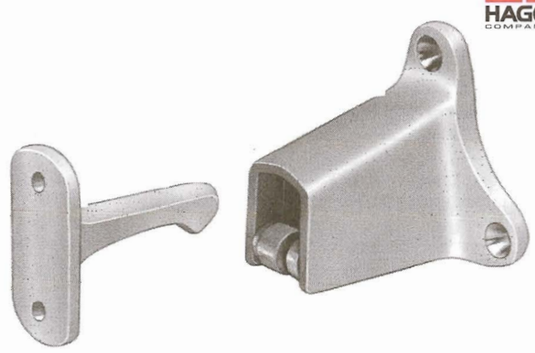

Fasteners	Quantity	
	Box	Case
#10 x 1" OHSMS & plastic anchors	2 each	20 each

Cast Floor Type Holder

Meets ANSI A156.16 for L01301

326F

3" x 3 7/16" (76 mm x 87 mm) Holder Base
1 15/16" (49 mm) Holder Projection
2 3/16" x 41/8" (56 mm x 105 mm) Floor Strike
1 1/4" (32 mm) Strike Height

Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.
For use with wood or metal doors, and wood or concrete floors.

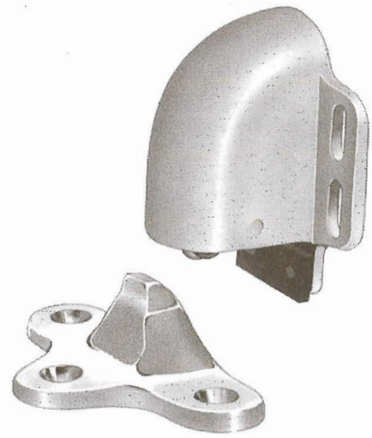

Fasteners	Quantity	
	Box	Case
3 each - 3/4" Phillips head 1/4 - #20 with lead anchor 3 each - 1-1/4" Phillips head #14 thread-forming screws 4 each - 1" Phillips head #10 thread-forming screws 4 each - 1-1/4" Phillips head #10 - 24 machine screws	1 each	10 each

Cast Floor Type Holder

Meets ANSI A156.16 for L01301

327F

3" x 3 7/16" (76 mm x 87 mm) Holder Base
1 15/16" (49 mm) Holder Projection
2 3/16" x 41/8" (56 mm x 105 mm) Floor Strike
1 3/4" (44 mm) Strike Height

328F

2 1/4" (57 mm) Strike Height

329F

2 3/4" (70 mm) Strike Height

Material: Cast Brass
Finishes: US3, US10, US10B, US26, and US26D only.
For use with wood or metal doors, and wood or concrete floors.

Fasteners	Quantity	
	Box	Case
3 each - 3/4" Phillips head 1/4 - #20 with lead anchor 3 each - 1-1/4" Phillips head #14 thread-forming screws 4 each - 1" Phillips head #10 thread-forming screws 4 each - 1-1/4" Phillips head #10 - 24 machine screws	1 each	10 each

Door Trim and Auxiliary

Pocket Door Latch

For use with 1 3/8" to 1 3/4" (35 mm to 45 mm) door. Meets ANSI A156.14 for D0821.

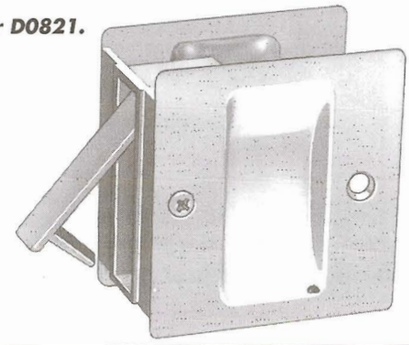

330D

2 3/4" x 2 1/2 (70 mm x 64 mm) Size
1 3/8" (35 mm) Extension of Finger Piece

Material: Brass
Finish: US3, US5, US10B, US15A, US19, US26, and US26D.

Quantity	
Box	Case
1 each	20 each

Pocket Door Privacy Latch

For use with 1 3/8" (35 mm) door. Meets ANSI A156.14 for D0831.

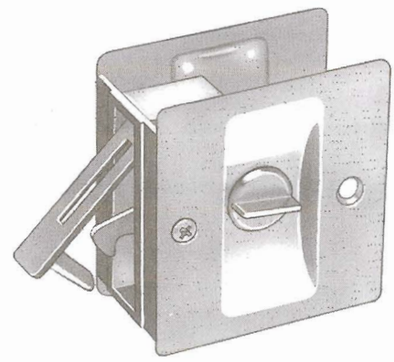

330L

2 3/4" x 2 1/2" (70 mm x 64 mm) Size
1 3/8" (35 mm) Extension of Finger Piece
1" x 2 1/4" (25 mm x 57 mm) Strike Size

Material: Brass
Finish US3, US5, US10B, US15A, US19, US26, and US26D.
Turn piece locks to strike in jamb. Emergency release available from opposite side.

Quantity	
Box	Case
1 each	20 each

Pocket Door Privacy Latch

For use with 1 3/4" (45 mm) door. Meets ANSI A156.14 for D0831.

330M

2 3/4" x 2 1/2" (70 mm x 64 mm) Size
1 3/8" (35 mm) Extension of Finger Piece
1" x 2 1/4" (25 mm x 57 mm) Strike Size

Material: Brass
Finish US3, US5, US10B, US15A, US19, US26, and US26D.
Turn piece locks to strike in jamb. Emergency release available from opposite side.

Quantity	
Box	Case
1 each	20 each

ASA Strike Plate

Meets ANSI A115.2 for ASA Strike

335S

1 1/4" x 4 7/8" (32 mm x 124 mm) Overall Size
5/8" (16 mm) Lid
.080" (2.0 mm) Thickness

Material: Brass, Bronze, or Stainless Steel
Finishes US3, US10, US10B, or US32D.
For jambs prepared in accordance with ANSI A115.2.

Fasteners	Quantity	
	Box	Case
12/24 x 1/2" FPHS	10 each	100 each

Door Trim and Auxiliary

HAGER COMPANIES

Door Edge Filler Plate - 161 Prep
336A

NEW!

Material: Primed Steel — .125 Thickness — Fasteners: Flat Head Phillips Undercut, 8/32 x 3/8" - 2 each
Size: 1 1/8" x 2 1/4" (29 mm x 57 mm)



Door Edge Filler Plate - 86 Prep
336B

NEW!

Material: Primed Steel — .187 Thickness — Fasteners: Flat Head Phillips Undercut, #12 - 24 x 3/8" - 2 each
Size: 1 1/4" x 8" (32 mm x 203 mm)

Door Face Plate - Deadlock
336C

NEW!

Material: Primed Steel — .028 Thickness — Fasteners: #10/32 x 1-1/2 FPHMS
Size: 1 3/4" (45 mm)

Door Face Filler Plate - 161 Prep
336D

NEW!

Material: Primed Steel — .055 Thickness — Fasteners: #10/32 x 1- 3/8" FPHMS
Size: 2 5/8" (67 mm)

Door Edge Filler Plate - Square
336E

NEW!

Material: Primed Steel — .125 Thickness — Fasteners: Flat Head Phillips Undercut, #12 - 24 x 3/8" - 2 each
Size: 1 3/4" x 4 1/2" (45 mm x 114 mm)

Door Edge Shim Filler Plate - Bevel
336F

NEW!

Material: Primed Steel — .134 Thickness — Fasteners: Flat Head Phillips Undercut, #12 - 24 x 1/2" - 2 each
Size: 1 1/2" x 4 1/2" (38 mm x 114 mm)



Door Edge Shim Filler Plate - Square
336G

NEW!

Material: Primed Steel — .134 Thickness — Fasteners: Flat Head Phillips Undercut, #12 - 24 x 1/2" - 2 each
Size: 1 3/4" x 5" (38 mm x 127 mm)



Door Edge Shim Filler Plate - Bevel
336H

NEW!

Material: Primed Steel — .134 Thickness — Fasteners: Flat Head Phillips Undercut, #12 - 24 x 1/2" - 2 each
Size: 1 1/2" x 5" (38 mm x 127 mm)



Flush Bolt Strike Filler Plate - Frame
336J

NEW!

Material: Primed Steel — .083 Thickness — Fasteners: Flat Head Phillips Undercut, #8/32 x 1/2" - 2 each
Size: 15/16" x 2 1/4" (24 mm x 57 mm)

Flush Bolt Filler Plate - Door
336K

NEW!

Material: Primed Steel — .134 Thickness — Fasteners: Flat Head Phillips Undercut, #8/32 x 1/2" - 2 each
Size: 1" x 6 3/4" (25 mm x 172 mm)

Door Trim and Auxiliary

HAGER COMPANIES

Hinge Filler Plate - Frame
336L

NEW!



Material: Primed Steel — .125 Thickness — Fasteners: Flat Head Phillips Undercut, #12-24 x 3/8" - 2 ea.
Size: 1 5/8" x 4 1/2" (41 mm x 114 mm)

Hinge Filler Plate - Frame
336M

NEW!

Material: Primed Steel — .134 Thickness — Fasteners: Flat Head Phillips Undercut, #12-24 x 1/2" - 2 each
Size: 1 5/8" x 5" (41 mm x 127 mm)

Latch Adapter Filler Plate - 86 to 161 Edge Prep
336N

NEW!

Material: Primed Steel — .248 Thickness — Fasteners: Flat Head Phillips Undercut, #12-24 x 3/8" - 2 each
Size: 1 1/4" x 8" (32 mm x 203 mm)

Deadlock Strike Filler Plate - Frame
336P

NEW!



Material: Primed Steel — .083 Thickness — Fasteners: Flat Head Phillips Undercut, #8/32 x 1/2" - 2 each
Size: 1 1/8" x 2 3/4" (29 mm x 70 mm)

ASA Strike Filler Plate - Frame
336Q

NEW!

Material: Primed Steel — .093 Thickness — Fasteners: Flat Head Phillips Undercut, #12-24 x 3/8" - 2 each
Size: 1 1/4" x 4 7/8" (32 mm x 124 mm)

Cylindrical Lock Strike Filler Plate - Frame
336R

NEW!

Material: Primed Steel — .083 Thickness — Fasteners: Flat Head Phillips Undercut, #8/32 x 1/2" - 2 each
Size: 1 1/8" x 2 3/4" (29 mm x 70 mm)

Template Hinge Shim
337A

NEW!

Material: Primed Steel — .028 Thickness
Size: 1 7/16" x 4 1/2" (37 mm x 114 mm)

Template Hinge Shim
337B

NEW!

Material: Primed Steel — .065 Thickness
Size: 1 7/16" x 4 1/2" (37 mm x 114 mm)

Template Hinge Shim
337C

NEW!



Material: Primed Steel — .028 Thickness
Size: 1 7/16" x 5" (37 mm x 127 mm)

Template Hinge Shim
337D

NEW!

Material: Primed Steel — .065 Thickness
Size: 1 7/16" x 5" (37 mm x 127 mm)

Door Trim and Auxiliary

Latch Protection Plate

For use with both cylindrical and mortise lock sets on hollow metal or wood doors.

340D

3" x 11" (76 mm x 279 mm) Size

Material: Steel, Stainless Steel
Finish: USP, US2C, L2, and US32D only.
Frame pin prevents prying of door. Non-handed.

Fasteners	Quantity	
	Bag	Case
5/16"-18 x 21/4" carriage bolts and hex nuts	1 each	12 each

Latch Protection Plate with Lock Cut Out

For use with both cylindrical and mortise lock sets on hollow metal or wood doors.

341D

3" x 11" (76 mm x 279 mm) Size

Material: Steel, Stainless Steel
Finish: USP, US2C, L2, and US32D only.
Frame pin prevents prying of door. Cut to accommodate lock. Non-handed.

Fasteners	Quantity	
	Bag	Case
5/16"-18 x 21/4" carriage bolts and hex nuts	1 each	12 each

Latch Protection Plate

For use with both cylindrical and mortise lock sets on hollow metal or wood doors.

345D

15/8" x 10" (41 mm x 254 mm) Size

Material: Steel, Stainless Steel
Finish: USP, US2C, L2, and US32D only.
Non-handed.

Fasteners	Quantity	
	Bag	Case
5/16"-18 x 21/4" carriage bolts and sleeve nuts	1 each	12 each

Door Trim and Auxiliary

HAGER COMPANIES

Coat Hook

901P Short Single

1" (25 mm), 1 1/4" (32 mm)

902P Long Single

1" (25 mm), 2 1/2" (63 mm)

903P Long Double

1" (25 mm), 2 1/2" (63 mm)

Material: Brass/Bronze
Finishes: US3 and US26D only.
Weight: Not available







Coat Hook Single/Angled

936P

1 15/16" (49 mm), 3 1/4" (82 mm)

Material: Brass/Bronze
Finishes: US3 and US26 only.
Weight: Not available

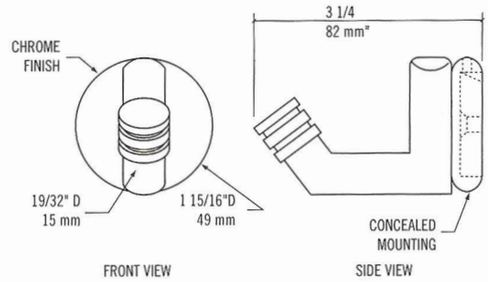

Coat Hook

937P

3 3/4" (95 mm)

Material: Brass/Bronze
Finishes: US3 and US26D only.
Weight: Not available

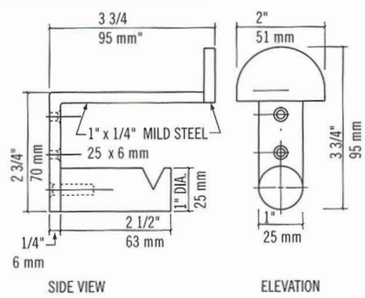

Coat Hook Double

940P

Coat Hook Single

941P

2 5/16" x 1 15/16" (59 x 49 mm) Single

4 1/2" x 3 1/2" (114 x 49 mm) Double

Material: Brass/Bronze
Finishes: US3 and US26D only.
Weight: Not available

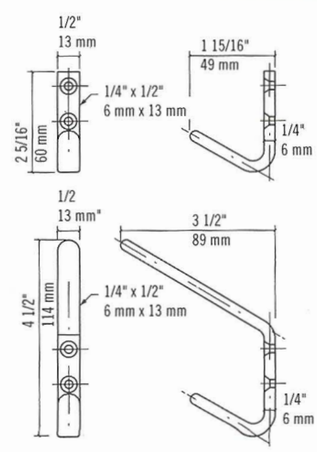

Door Trim and Auxiliary

Coat Hook Double
(Surface mounting)
945P
5 1/2" (140 mm)
Material: Brass/Bronze
Finishes: US3 and US26D only.
Weight: Not available



Coat Hook Double
(With concealed mounting)
946P
5 1/2" (140 mm)
Material: Brass/Bronze
Finishes: US3 and US26D only.
Weight: Not available



Coat Hook Single/Double
951P (Single)
952P (Double)
5 3/4" (146 mm), 2 7/8" (73 mm)
Material: Brass/Bronze
Finishes: US3 and US26D only.
Weight: Not available

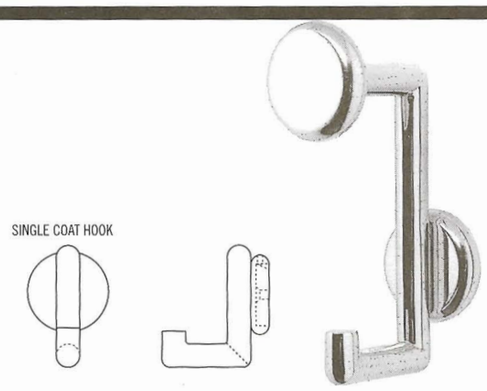

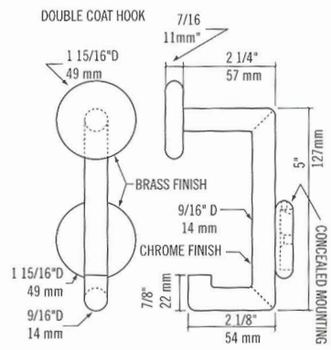

Coat Hook Double/Angled
956P
5 11/16" (144 mm)
Material: Brass/Bronze
Finishes: US3 and US26D only.
Weight:



Coat Hook
957P
1 1/2" (38 mm)
Material: Brass/Bronze
Finishes: US3 and US26D only.
Weight: Not available

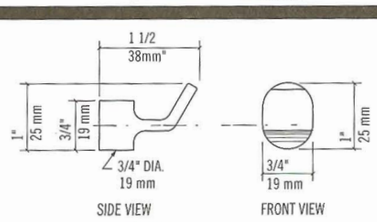

PH. 1-800-325-9995 or 1-314-772-4400 • Fax 1-800-782-0149 or 1-314-772-0744

rev. 7/02

"THE FIRST FAMILY OF SUPERIOR HARDWARE"

Door Trim and Auxiliary

Roller Latch with Full Lip Strike

Meets ANSI A156.16 for E09091

1442

1" x 3 3/8" (25 mm x 86 mm) Latch Face
1 11/16" x 2 1/4" (43 mm x 57 mm) Strike Size
Cast Metal Strike

Material: Forged Brass
Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D only.
* Adjustable Spring Tension.

Fasteners	Quantity	
	Bag	Case
#8 x 1" FHWS, 8/32 FHMS	1 each	50 each

Roller Latch with ASA Strike

Meets ANSI A156.16 for E09101

1443

1" x 3 3/8" (25 mm x 86 mm) Latch Face
1 1/4" x 4 7/8" (32 mm x 124 mm) Strike Size
.090" (2.3 mm) Gauge Wrought Metal Strike

Material: Forged Brass
Finishes: US3, US10, US10B, US15A, US19, US26, and US26D only.
* Adjustable Spring Tension.



Fasteners	Quantity	
	Bag	Case
#12/24 FHMS, #8 OH Tapping screws	1 each	50 each

160° Door Viewer

1755

Polybag (1 each)
Solid Brass

Permits one way observation. For doors up 2⅛" thick (adjustable). Requires a ½" hole.

1755		
Quantity		Avg weight per case (lbs)
Box	Case	
10 each	100 each	7

200° Door Viewer

1756

Polybag (1 each)
Solid Brass

Permits one way observation. For doors up 2⅛" thick (adjustable). Requires a 9/16" hole.

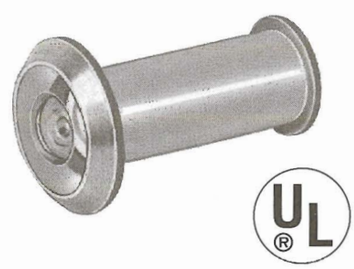

1756		
Quantity		Avg weight per case (lbs)
Box	Case	
—	50 each	5

Door Trim and Auxiliary

Engraved Plastic Sign – Push

Meets ANSI A156.16 for L03201

350H

2" x 4" (51 mm x 102 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Lettering 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: Brown (W1) with white lettering
Black (W2) with white lettering
Blue (W3) with white lettering
Silver (B1) with black lettering
Gold (B2) with black lettering

Signs are individually packed in a polybag.

350H

350L

Same as 350H except:
Engraved Plastic Sign – Pull

Quantity	
Bag	Case
1 each	5 each

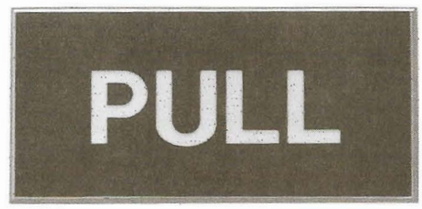

350L

Engraved Plastic Sign – Men

Meets ANSI A156.16 for L03201

350M

2" x 5" (51 mm x 127 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Lettering: 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors Brown (W1) with white lettering
Black (W2) with white lettering
Blue (W3) with white lettering
Silver (B1) with black lettering
Gold (B2) with black lettering

Signs are individually packed in a polybag.

350M

350W

Same as 350M except:
Engraved Plastic Sign – Women

Quantity	
Bag	Case
1 each	5 each

350W

Engraved Plastic Sign – Numbers

Meets ANSI A156.16 for L03201

350R

2" x 4" (51 mm x 102 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Lettering 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: Brown (W1) with white lettering
Black (W2) with white lettering
Blue (W3) with white lettering
Silver (B1) with black lettering
Gold (B2) with black lettering

Signs are individually packed in a polybag.

Quantity	
Bag	Case
1 each	5 each

Door Trim and Auxiliary

Engraved Vertical Plastic Sign – Push

Meets ANSI A156.16 for L03201

351H

1" x 4 1/2" (25 mm x 114 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Lettering: 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: Brown (W1) with white lettering
Black (W2) with white lettering
Blue (W3) with white lettering
Silver (B1) with black lettering
Gold (B2) with black lettering

Signs are individually packed in a polybag.

351H

351L

351L

Same as 351H except:
Engraved Plastic Sign – Pull

Quantity	
Bag	Case
1 each	5 each

Engraved Plastic Sign – Men with Handicap

Meets ANSI A156.16 for L03201

352M

2" x 6" (51 mm x 152 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Lettering: 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: Brown (W1) with white lettering
Black (W2) with white lettering
Blue (W3) with white lettering
Silver (B1) with black lettering
Gold (B2) with black lettering

Signs are individually packed in a polybag.

352M

352W

Same as 352M except:
Engraved Plastic Sign – Women with Handicap

Quantity	
Bag	Case
1 each	5 each

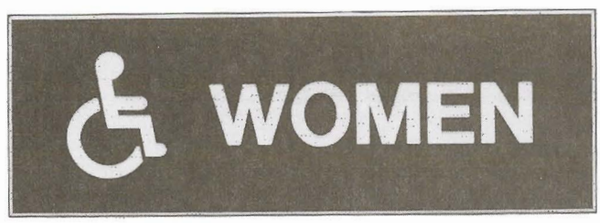

352L

Engraved Plastic Sign – Restroom

Meets ANSI A156.16 for L03201

354A

2" x 6" (51 mm x 152 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Lettering: 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: Black (W2) with white lettering
Blue (W3) with white lettering

Signs are individually packed in a polybag.

354A

354B

Same as 352M except:
Engraved Plastic Sign – Restrooms

Quantity	
Bag	Case
1 each	5 each

354B

Door Trim and Auxiliary

Engraved Metal Sign – Men
Meets ANSI A156.16 for L03201

360M
2" x 6" (51 mm x 152 mm) Size
.050" (1.3 mm) Thickness

Material: Metal
Lettering: 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: US3 with engraved black lettering
US28 with engraved black lettering
US32D with engraved black lettering
Signs are individually packed in a polybag.

360M

360W
Same as 360M except:
Engraved Metal Sign – Women

Quantity	
Bag	Case
1 each	5 each

360W

Engraved Metal Sign – Push
Meets ANSI A156.16 for L03201

361H
2" x 4" (51 mm x 102 mm) Size
.050" (1.3 mm) Thickness

Material: Metal
Lettering: 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: US3 with engraved black lettering
US28 with engraved black lettering
US32D with engraved black lettering
Signs are individually packed in a polybag.

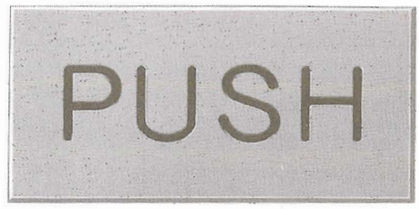

361H

361L
Same as 361H except:
Engraved Metal Sign – Pull

Quantity	
Bag	Case
1 each	5 each

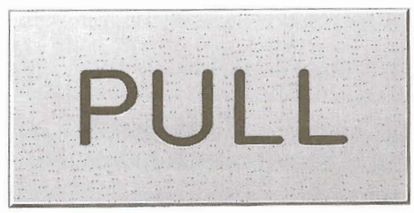

350L

Engraved Vertical Metal Sign – Push
Meets ANSI A156.16 for L03201

362H
1" x 4 1/2" (25 mm x 114 mm) Size
.050" (1.3 mm) Thickness

Material: Metal
Lettering: 3/4" (19 mm) Helvetica
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: US3 with engraved black lettering
US28 with engraved black lettering
US32D with engraved black lettering
Signs are individually packed in a polybag.

362H

362L
Same as 362H except:
Engraved Plastic Sign – Pull

Quantity	
Bag	Case
1 each	5 each

362L

PH. 1-800-325-9995 or 1-314-772-4400 • Fax 1-800-782-0149 or 1-314-772-0744

rev. 7/02

"THE FIRST FAMILY OF SUPERIOR HARDWARE"

Door Trim and Auxiliary

Engraved Plastic International Symbol Sign – No Smoking

Meets ANSI A156.16 for L03201

364N

6" x 6" (152 mm x 152 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: Red (W4) with raised white symbol
Signs are individually packed in a polybag.

Quantity	
Bag	Case
1 each	5 each

Engraved Plastic International Symbol Sign – Handicap

Meets ANSI A156.16 for L03201

364S

3" x 3" (76 mm x 76 mm) Size
1/16" (1.6 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners: Pressure sensitive tape (standard), or screws (specify).
Colors: Blue (W3) with raised white symbol
Signs are individually packed in a polybag.

364S

364M

Same as 364S except:
4" x 4" (102 mm x 102 mm) Size
1/8" (3.2 mm) Thickness

364M

364L

Same as 364S except:
6" x 6" (152 mm x 152 mm) Size
1/8" (3.2 mm) Thickness

Colors: Black (W3) with raised white symbol
Blue (W3) with raised white symbol
Brown (W4) with raised white symbol

Quantity	
Bag	Case
1 each	5 each

364L

ADA Tactile Sign – Men

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets ANSI A156.16 for L03201

365M

6" x 8" (152 x 203 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners: Pressure sensitive tape.
Colors: Brown (W1) with white symbol and lettering
Black (W2) with white symbol and lettering
Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

365W

Same as 365M except:
ADA Tactile Sign – Women

Quantity	
Bag	Case
1 each	5 each

365M

365W

Door Trim and Auxiliary

ADA Tactile Sign – Numbers

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets requirements for ADA numbered rooms, hotel guest rooms, patient rooms, office suites, etc...
Meets ANSI A156.16 for L03201

366R

2" x 5" (51 mm x 127 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners: Pressure sensitive tape.
Colors: Brown (W1) with white symbol and lettering
Black (W2) with white symbol and lettering
Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

Quantity	
Bag	Case
1 each	5 each

ADA Tactile Sign – Stairs

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets ANSI A156.16 for L03201

366S

6" x 8" (152 mm x 203 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners: Pressure sensitive tape.
Colors: Brown (W1) with white symbol and lettering
Black (W2) with white symbol and lettering
Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

Quantity	
Bag	Case
1 each	5 each

ADA Tactile Sign – Exit

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets ANSI A156.16 for L03201

368E

6" x 8" (152 mm x 203 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners: Pressure sensitive tape.
Colors: Brown (W1) with white symbol and lettering
Black (W2) with white symbol and lettering
Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

Quantity	
Bag	Case
1 each	5 each

ADA Tactile Sign – Men

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets ANSI A156.16 for L03201

368M

6" x 8" (152 mm x 203 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners Pressure sensitive tape.
Colors: Brown (W1) with white symbol and lettering
Black (W2) with white symbol and lettering
Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

368W

Same as 368M except:
Engraved Plastic Sign – Women

Quantity	
Bag	Case
1 each	5 each

368M

368W

ADA Tactile Sign – Unisex

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets ANSI A156.16 for L03201

368U

8" x 8" (203 mm x 203 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners: Pressure sensitive tape.
Colors: Brown (W1) with white symbol and lettering
Black (W2) with white symbol and lettering
Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

Quantity	
Bag	Case
1 each	5 each

ADA Tactile Sign – Access Right

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets ANSI A156.16 for L03201

369R

6" x 8" (152 mm x 203 mm) Size
1/8" (3.2 mm) Thickness

Material: Plastic
Engraving: 1/32" (19 mm) raised
Fasteners: Pressure sensitive tape.
Colors: Brown (W1) with white symbol and lettering
Black (W2) with white symbol and lettering
Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

369L

Same as 369R except:
ADA Tactile Sign – Access Left

Quantity	
Bag	Case
1 each	5 each

369R

369L

ADA Tactile Sign – Men

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets ANSI A156.16 for L03201

370M

10 1/2" (267 mm) Size
9/16" (14 mm) Thickness

Material: Plastic
Engraving: Raised
Fasteners: Pressure sensitive tape.
Colors: Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

370W

Same as 368M except:
12" (305 mm) Size
ADA Tactile Sign – Women

Quantity	
Bag	Case
1 each	5 each

370M

370W

ADA Tactile Sign – Restroom

Includes Grade 2 Braille translation conforming to section 4.30 requirements.
Meets ANSI A156.16 for L03201

370U

12" (305 mm) Size
9/16" (14 mm) Thickness

Material: Plastic
Engraving: Raised
Fasteners: Pressure sensitive tape.
Colors: Blue (W3) with white symbol and lettering
Signs are individually packed in a polybag.

Quantity	
Bag	Case
1 each	5 each