Lock Guards

LG1

- Units are non-handed and incorporate security frame pin to prevent separation of the door and frame.
- Unit covers the latch bolt area of the door and lock, thereby providing added protection from burglars, vandals or normal abuse.
- Ideal for use with mortise or cylindrical locks.
- Easy installation.
- Through bolted with carriage bolts and nuts.
- Available in a variety of materials, 13 gauge stainless steel, 12 gauge steel and brass material.
- Finishes: Stainless Steel—US32D
  Steel—US2G, USP, SP313 (Dark Bronze)
  Brass—US4, US10

Dimensions:

11-1/2" Tall x 3" Wide

LG7

- Units are non-handed.
- Identical to LG1 without security frame pin.
- Unit covers the latch bolt area of the door and lock, thereby providing added protection from burglars, vandals or normal abuse.
- Ideal for use with mortise or cylindrical locks.
- Easy installation.
- Through bolted with carriage bolts and nuts.
- Available in 13 gauge stainless steel.
- Finish: Stainless Steel—US32D

Dimensions:

11-1/2" Tall x 3" Wide

How to Order:

LG____ - ____

Model:
1
7

Finishes:
LG1 US2G, US4, US10, USP, US32D, SP313
LG7 US32D

Lock Guards

LG10 thru LG12

LG10

- Ideally suited for use with rose or escutcheon 2-3/4" wide or less.
- For use with Type 86 Mortise and Type 161 Cylinder Locks (ANSI 156.13 Series 1000 and ANSI 156.2 Series 4000).
- No exposed fasteners on face of unit.
- Unique design provides maximum security, virtually eliminating the opening between door and frame at the latch point.
- Available in 13 Gauge Stainless Steel or 12 Gauge Steel.
- Finishes: Stainless Steel—US32D
  Steel—USP

Dimensions:
9-1/2" Tall x 2-1/2" Wide

LG11

- Designed for use on aluminum doors with latch-type locks or doors equipped with electric strikes.
- Unit is Handed - Specify left or right hand when ordering.
- No exposed fasteners on face of unit.
- Unique design provides maximum security, virtually eliminating the opening between door and frame at latch point.
- Available in 13 Gauge Stainless Steel or 12 Gauge Steel.
- Finishes: Stainless Steel—US32D
  Steel—SP313 (Dark Bronze)

Dimensions:
9-1/2" Tall x 3" Wide

LG12

- Narrow design unit for use on rose or escutcheon 3-1/2" or less.
- For use with Type 86 Mortise and Type 161 Cylinder Locks (ANSI 156.13 Series 1000 and ANSI 156.2 Series 4000).
- No exposed fasteners on face of unit.
- Unique design provides maximum security, virtually eliminating the opening between door and frame at the latch point.
- Available in 13 Gauge Stainless Steel or 12 Gauge Steel
- Finishes: Stainless Steel—US32D
  Steel—USP

Dimensions:
9-1/2" Tall x 1-1/2" Wide

Lock Guards

LG13 thru LG14

LG13

- Designed for use on all Type 161 Cylinder Locks (ANSI 156.2 Series 2000) Monolock and Unilock.
- No exposed fasteners on face of unit.
- Unique design provides maximum security, virtually eliminating the opening between door and frame at latch point.
- Available in 13 Gauge Stainless Steel or 12 Gauge Steel.
- Finishes: Stainless Steel—US32D
  Steel—USP

Dimensions:
7" Tall x 1-1/2" Wide

LG14

- Narrow design unit for use on rose or escutcheon 3-1/2" or less.
- For use with Von Duprin 6211 electric strike.
- No exposed fasteners on face of unit.
- Unique design provides maximum security.
- Available in 13 Gauge Stainless Steel
- Finish: Stainless Steel—US32D

Dimensions:
9-1/2" Tall x 2-9/16" Wide

How to Order:

LG ____ - ____ - ____

Model:
- **10**
- **11**
- **12**
- **13**
- **14**

Handing:
- **LG11** only (LH or RH)

Finishes:

LG10	US32D, USP
LG11	US32D, SP313
LG12	US32D, USP
LG13	US32D, USP
LG14	US32D

Crash Stop

Extra Heavy Duty Crash Stop

CS115

- Specially designed for full-size exterior doors.
- Tear resistant, grey vinyl cover.
- Heavy duty compression spring assembled to both ends of chain and end brackets.
- Packed with sheet metal screws.
- Cast Brass brackets with solid, welded steel chain.
- Meets ANSI/BHMA A156.16, L12231, (Grade 1).
- Finishes: US3, US4, US5, US10, US10B, US14, US15, US15A, US26, US26D.
- Optional thru-door fastening; machine screws with brass cap nuts and brass washers plated to the required finish. Order separately 09-340. Specify finish.



Prod No.	Lgth.	Recommended Door Width	Bracket Size
115-20	20-1/2"	30"	1-9/16" X 1-9/16"
115-25	25-1/2"	36"	1-9/16" X 1-9/16"
115-30	30-1/2"	42"	1-9/16" X 1-9/16"

How to Order:

CS115- ____ - ____

Size:
20
25
30

Finishes:
US3, US4, US5, US10, US10B, US14, US15, US15A, US26, US26D, US10B.

Exterior Door Hardware

15 Crash Stop

- For storm and combination doors.
- Protects doors, hinges and glass from wind damage.
- Rugged compression spring absorbs shock.
- Made with heavy gauge wrought steel brackets and steel chain.
- Packed with sheet metal screws.
- 22-3/4" long bracket.
- 13/16" diameter spring.
- Finish: F2C.

Screen Door Pull

25

- Made from cast aluminum or epoxy-coated aluminum.
- Can also be used as a window lift, drawer or utility pull.
- Finishes: A3, A4, A5, A10, A14, A92, A-A (almond), A-W (white), A-BLK (black).

Dimensions:
Overall Length: 4-7/8"
Mounting Hole Center-to-Center: 4-1/8"
Projection: 1-5/32"

Storm Door Latch

980

- For wood storm doors 7/8" to 1-1/8" thick.
- Reversible: fits right or left hand, inswinging or outswinging doors.
- Security lock feature operates from inside rose.
- Solid brass safety strike assures latching and is designed to compensate for air pressure build-up between doors.
- Made from wrought brass.
- Finishes: B3, B5, B10B, B15, B15A, B26, B26D.

Dimensions:
Backset: 1-3/4"
Rose Diameter: 1-7/8"
Knob Diameter: 1-3/4"
Knob Projection: 2"
Lever Length: 1-3/4"
Lever Projection: 1-7/8"

Non-Electric Door Chime

780

- Polished wrought brass front plate, inset with satin black plastic push plate.
- Chime case in ivory plastic.
- Ideal for interior apartment doors, condominiums and hotel/motels.
- Combines low initial cost with fast, economical installation.
- Unique placement of name and apartment number cards conceals mounting screws.
- Optical glass viewer permits screening of callers and is shutter controlled to insure one way vision only.
- Two-tone, mellow and resonant chime.
- Requires only one hole, 1" in diameter, through door.
- Fits 1-1/4" through 1-3/4" doors. Contact factory for use on other thickness doors.
- Packed with template and installation instructions, screws, name and number cards.
- Furnished with 700 viewer.

Prod	Front Plate			Chime Case			Finishes	
No.	Width	Height	Proj.	Width	Height	Proj.	Front plate	Chime Case
780	2-1/2"	4-9/16"	1"	2-3/4"	6-1/16"	2"	B3, B26D	Ivory Plastic

Viewers

One-Way Viewer

U696

- 150° Angle of View.
- For doors 1-3/8" to 2-1/16" thick.
- Secure, tamper-resistant.
- Solid brass body; glass lens.
- Simple installation — only a 1/2" hole required.
- Suggested installation height: 60" from floor.
- Trim washer available, 3/4" x .032" thick.
- UL Listed for use on fire door assemblies rated at 90 minutes.
- Conforms to ANSI/BHMA L23172 and L23222.
- Finishes: B4, B26D.

One-Way Viewer

U697

- 150° Angle of View.
- For doors 2-18" to 2-5/8" thick.
- Secure, tamper-resistant.
- Solid brass body; glass lens.
- Simple installation — only a 1/2" hole required.
- Suggested installation height: 60" from floor.
- Trim washer available, 3/4" x .032" thick.
- UL Listed for use on fire door assemblies rated at 90 minutes.
- Conforms to ANSI/BHMA A156.16 L23172 and L23222.
- Finishes: B4, B26D.

One-Way Wide Angle Viewer

698
U698

- 190° Angle of View.
- Lens projects 1/4" from face of door.
- 4 optical glass lenses.
- For doors 1-3/8" to 2-1/8" thick.
- Solid brass body and barrel.
- Simple installation — only a 9/16" hole required.
- Suggested installation height: 60" from floor.
- U698 is UL Listed for use on fire door assemblies rated at 90 minutes.
- Conforms to ANSI/BHMA A156.16 L23172 and L23222.
- Finishes: B3, B26D.

Viewers

One-Way Viewer

700
U700

- 120° Angle of View.
- For doors 1-3/8" to 2-1/16" thick.
- Secure, tamper-resistant.
- Solid brass body; glass lens.
- Simple installation—only a 1/2" hole required.
- Suggested installation height: 60" from floor.
- Trim washer available, 3/4" x .032" thick.
- U700 is UL Listed for use on fire door assemblies rated at 90 minutes.
- Conforms to ANSI/BHMA A156.16 L23173 (700, U700) and L23222 (U700).
- Finishes: B4, B26D.

One-Way Viewer

701
U701

- 120° Angle of View.
- For doors 2-1/8" to 2-5/8" thick.
- Secure, tamper-resistant.
- Solid brass body; glass lens.
- Simple installation—only a 1/2" hole required.
- Suggested installation height: 60" from floor.
- Trim washer available, 3/4" x .032" thick.
- U701 is UL Listed for use on fire door assemblies rated at 90 minutes.
- Conforms to ANSI/BHMA A156.16 L23173 (701, U701) and L23222 (U701).
- 701 Finishes: B4, B10B, B15, B15A, B26, B26D.
- U701 Finishes: B4, B26D.

Door Knockers

Door Knocker with Number Plate, Optional Viewer

763 Knocker Only
U763 x U700 Knocker with Viewer

- Knocker made from solid brass.
- Factory-engraved number plates available. White numerals and/or letters, mazimum of 7, engraved on mahogany-grained plastic plate. When ordering, specify “E” prefix and engraving requirements.
- Conforms to ANSI/BHMA A156.16 L23151.
- Packed with sheet metal screws.
- Knocker Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26, B26D.
- Viewers supplied in B4 or B26D.

Knocker Dimensions:
Length: 4"
Width: 2-3/16"
Projection: 9/16"
Mounting Hole Center-to-Center: 3-7/32"

Door Knocker with Number Plate/Card Holder, Optional Viewer

764 Knocker Only
U764 x U700 Knocker with Viewer

- Knocker made from solid brass.
- Factory-engraved number plates available. White numerals and/or letters, mazimum of 7, engraved on mahogany-grained plastic plate. When ordering, specify “E” prefix and engraving requirements.
- Conforms to ANSI/BHMA A156.16 L23151.
- Packed with sheet metal screws.
- Knocker Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26, B26D.
- Viewers supplied in B4 or B26D.

Knocker Dimensions:
Length: 4-15/16"
Width: 2-3/16"
Projection: 9/16"
Mounting Hole Center-to-Center: 3-7/32"

Door Knocker with U696/U698/U700 Viewer

771 Knocker Only
U771 x U696 Knocker with Viewer
U771 x U698 Knocker with Viewer
U771 x U700 Knocker with Viewer

- Knocker made from solid brass.
- Mounting screws concealed. Packed with sheet metal screws.
- Conforms to ANSI/BHMA A156.16 L23151.
- Knocker Finishes: B3, B5, B10, B26, B26D.
- U696 and U700 Viewers supplied in B4 or B26D.
  U698 Viewer supplied in B3 or B26D.

Knocker Dimensions:
Length: 3-1/8"
Width: 2-1/8"
Projection: 1/2"
Mounting Hole Center-to-Center: 2-1/4"

Door Knockers

Door Knocker with Number Plate, Card Holder and Optional U698/U700/U701 Viewer

774 Knocker Only
U774 x U698 Knocker with Viewer
U774 x U700 Knocker with Viewer
U774 x U701 Knocker with Viewer

- Knocker made from solid brass.
- Factory-engraved number plates available. White numerals and/or letters, mazimum of 7, engraved on mahogany-grained plastic plate. When ordering, specify "E" prefix and engraving requirements.
- Mounting screws concealed. Packed with sheet metal screws.
- Conforms to ANSI/BHMA A156.16 L23151.
- Knocker Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26D.
- U698 Viewer supplied in B3 or B26D.
  U700 and U701 Viewers supplied in B4 or B26D.

Knocker Dimensions:
Length: 4-3/16"
Width: 2-3/16"
Projection: 1/2"
Mounting Hole Center-to-Center: 2-1/4"

Door Knocker with Optional Viewers

02-3100 Knocker Only
02-31001 Knocker with 700 Viewer
02-31001U Knocker with U700 Viewer
02-31002 Knocker with 701 Viewer

- Knocker made from forged brass.
- Knocker Finishes: 605, 606, 609, 612, 613, 618, 619, 620, 625, 626.
- Viewers supplied in B4 or B26D.

Knocker Dimensions:
Length: 7-1/16"
Width: 2-15/16"
Projection: 7/8"
Mounting Hole Center-to-Center: 4-15/16"

Door Knocker with Optional Viewers

02-3101 Knocker Only
02-31011U Knocker with U700 Viewer
02-31012 Knocker with 701 Viewer
02-31012U Knocker with U701 Viewer

- Knocker made from forged brass.
- Knocker Finishes: 605, 606, 609, 612, 613, 618, 619, 620, 625, 626.
- Viewers supplied in B4 or B26D.

Knocker Dimensions:
Length: 6-11/16"
Width: 1-7/8"
Projection: 13/16"
Mounting Hole Center-to-Center: 5-7/8"

Door Knockers

Door Knocker with Optional Viewers

02-3102 Knocker Only
02-31021 Knocker with 700 Viewer
02-31021U Knocker with U700 Viewer
02-31022 Knocker with 701 Viewer
02-31022U Knocker with U701 Viewer

- Knocker made from forged brass.
- Knocker Finishes: 605, 606, 609, 612, 613, 618, 619, 620, 625, 626.
- Viewers supplied in B4 or B26D.

Knocker Dimensions:
Length: 6-7/16"
Width: 2-15/16"
Projection: 15/16"
Mounting Hole Center-to-Center: 4-1/8"

Door Knocker with Optional Viewer, Magnetic Mounting

02-3107 Knocker Only
02-31072 Knocker with 701 Viewer
02-3107MAG Magnetic Knocker

- Knocker made from forged brass.
- 2-3107 MAG features magnetic mounting on metal doors.
- Knocker Finishes, excluding magnetic: 605, 606, 609, 612, 613, 618, 619, 620, 625, 626.
- 02-3107MAG Finishes: 505, 605.
- Viewers supplied in B4 or B26D.

Knocker Dimensions:
Length: 8-1/2"
Width: 4-1/8"
Projection: 1"
Mounting Hole Center-to-Center: 5"

Door Knocker

02-3115

- Knocker made from forged brass.
- Knocker Finishes: 605, 606, 609, 612, 613, 618, 619, 620, 625, 626.

Dimensions:
Length: 7-3/4"
Width: 2"
Projection: 2-7/8"
Mounting Hole Center-to-Center: 5"

Door Knockers

Door Knocker with Optional Viewers

02-3122 Knocker Only
02-31221 Knocker with 700 Viewer
02-31221U Knocker with U700 Viewer
02-31222 Knocker with 701 Viewer
02-31222U Knocker with U701 Viewer

- Knocker made from wrought brass.
- Knocker Finishes: 605, 606, 609, 612, 613, 618, 619, 620, 625, 626.
- Viewers supplied in B4 or B26D.

Dimensions:
Length: 4"
Width: 2-3/16"
Projection: 9/16"
Mounting Hole Center-to-Center: 3-7/32"

Door Knocker with Optional Viewers

02-3125 Knocker Only
02-31251 Knocker with 700 Viewer
02-31251U Knocker with U700 Viewer
02-31252 Knocker with 701 Viewer
02-31252U Knocker with U701 Viewer

- Knocker made from forged brass.
- Knocker Finishes: 605, 606, 609, 612, 613, 618, 619, 620, 625, 626.
- 02-3125 and 02-31252 also available in 505.
- Viewers supplied in B4 or B26D.

Dimensions:
Length: 5-15/16"
Width: 3"
Projection: 1-1/16"
Mounting Hole Center-to-Center: 3-15/16"

House Numbers

Century House Numbers

02-30_0

- 4" High.
- Made from cast brass.
- Brass screws included.
- Finish: 605.

Model	House Number
02-3000	#0
02-3010	#1
02-3020	#2
02-3030	#3
02-3040	#4
02-3050	#5
02-3060	#6
02-3070	#7
02-3080	#8
02-3090	#9

Century House Numbers

02-30_1

- 6" High.
- Made from forged brass.
- Brass screws included.
- Finish: 605.

Model	House Number
02-3001	#0
02-3011	#1
02-3021	#2
02-3031	#3
02-3041	#4
02-3051	#5
02-3061	#6
02-3071	#7
02-3081	#8
02-3091	#9

Heritage House Number

02-30_3

- 2-3/4" High.
- Colonial styling.
- Made from cast brass.
- Fits limited space; often used for apartments and hotel rooms.
- Conforms to ANSI/BHMA A156.16 L13181.
- Brass brads included.
- Finish: 605.

Model	House Number
02-3003	#0
02-3013	#1
02-3023	#2
02-3033	#3
02-3043	#4
02-3053	#5
02-3063	#6
02-3073	#7
02-3083	#8
02-3093	#9

House Numbers

Traditional House Numbers

02-30_4

- 4" High.
- Popular traditional styling for easy readability.
- Made from solid wrought brass.
- Conforms to ANSI/BHMA A156.16 L13181.
- Brass brads included.
- Finishes: 605, 609, 619, 620, 626.

Model	House Number
02-3004	#0
02-3014	#1
02-3024	#2
02-3034	#3
02-3044	#4
02-3054	#5
02-3064	#6
02-3074	#7
02-3084	#8
02-3094	#9

Contemporary House Numbers

02-30_5

- 5" High.
- Bold, thick design is easy to see from a distance.
- Made from cast brass.
- Mounting screws included.
- Finishes: 505, 605, 613, 619, 620, 625.

Model	House Number
02-3005	#0
02-3015	#1
02-3025	#2
02-3035	#3
02-3045	#4
02-3055	#5
02-3065	#6
02-3075	#7
02-3085	#8
02-3095	#9

Hammered Aluminum Traditional House Numbers

466

- 4-1/2" High.
- Conforms to ANSI/BHMA A156.16 L43191.
- Brads included.
- Black, electroplated on aluminum.
- Finish: A19.

Model	House Number
466 NO.0	#0
466 NO.1	#1
466 NO.2	#2
466 NO.3	#3
466 NO.4	#4
466 NO.5	#5
466 NO.6	#6
466 NO.7	#7
466 NO.8	#8
466 NO.9	#9

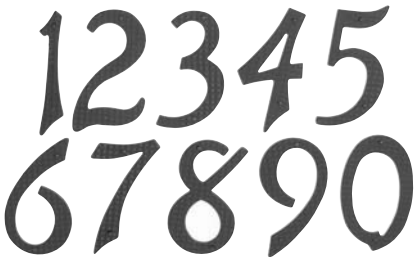

Letter Box Plates - Weather-Tite®

Weather-Tite® Letter Box Plates

- Weather-Tite construction featuring interlocking flap and frame gives added protection from weather.
- 620 Series Models feature spring loaded front plate features bronze spring to insure tightly closed position. Can be installed in vertical position. 618 and 619 models are gravity operated only.
- Rugged construction. Made of heavy gauge wrought brass, bronze or aluminum.
- Template for door cut-out packed with all letter box plates.
- Sex bolts optional.

Letter Box Plate with Standard (Open) Back Plate

618

- Gravity operated front plate.
- Finish: A63.



Dimensions:
Overall Size: 10" x 3"
Plate Opening: 7-1/2" x 2"

Letter Box Plate with Covered Back Plate

619

- Gravity operated front plate.
- Finish: A63.

Dimensions:
Overall Size: 10" x 3"
Plate Opening: 7-1/2" x 2"

Magazine Size Letter Box Plate with Standard (Open) Back Plate

620

- Spring-loaded front plate.
- Finishes: B-505, B3, B4, B5, B10, B10B(B613), B14, B15, B15A(B-620), B26(B-625), B26D, PA28.



Dimensions:
Overall Size: 13" x 3-9/16"
Plate Opening: 11" x 2"

Magazine Size Letter Box Plate with Covered Back Plate

621

- Spring-loaded front plate.
- Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26, B26D, PA28.

Dimensions:
Overall Size: 13" x 3-9/16"
Plate Opening: 11" x 2"

Letter Box Plates - Weather-Tite®

Weather-Tite® Letter Box Plates

- Weather-Tite construction featuring interlocking flap and frame gives added protection from weather.
- 620 Series Models feature spring loaded front plate features bronze spring to insure tightly closed position. Can be installed in vertical position. 618 and 619 models are gravity operated only.
- Rugged construction. Made of heavy gauge wrought brass, bronze or aluminum.
- Template for door cut-out packed with all letter box plates.
- Sex bolts optional.

Magazine Size Letter Box Plate with Hood and Covered Back Plate

622

- Spring-loaded front plate.
- Finish: B3, B4, B5, B10, B10B, B14, B15, B15A, B26, B26D.

Dimensions:
Overall Size: 13" x 3-9/16"
Plate Opening: 11" x 2"
Hood Projection: 1-5/8"

Letter Box Plate with Standard (Open) Back Plate

623

- Spring-loaded front plate.
- Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26, B26D, PA28.

Dimensions:
Overall Size: 10" x 3"
Plate Opening: 7-1/2" x 2"

Letter Box Plate with Covered Back Plate

624

- Spring-loaded front plate.
- Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26, B26D, PA28.

Dimensions:
Overall Size: 10" x 3"
Plate Opening: 7-1/2" x 2"

Letter Box Plate with Hood and Covered Back Plate

625

- Spring-loaded front plate.
- Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26D, PA28.

Dimensions:
Overall Size: 10" x 3"
Plate Opening: 7-1/2" x 2"
Hood Projection: 1-5/8"

Letter Box Plates - Weather-Tite®

Weather-Tite® Letter Box Plates

- Weather-Tite construction featuring interlocking flap and frame gives added protection from weather.
- 620 Series Models feature spring loaded front plate features bronze spring to insure tightly closed position. Can be installed in vertical position. 618 and 619 models are gravity operated only.
- Rugged construction. Made of heavy gauge wrought brass, bronze or aluminum.
- Template for door cut-out packed with all letter box plates
- Sex bolts optional.

Letter Box Plate with Standard (Open) Back Plate

626

- Spring-loaded front plate.
- Finishes: B-505, B3, B4, B5, B10, B10B(B-613), B14, B-15(B-619), B15A(B-620), B26(B-625), B26D, PA28.

Dimensions:
Overall Size: 8-3/4" x 2-7/8"
Plate Opening: 7" x 1-7/8"

Letter Box Plate with Covered Back Plate

627

- Spring-loaded front plate.
- Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26, B26D.

Dimensions:
Overall Size: 8-3/4" x 2-7/8"
Plate Opening: 7" x 1-7/8"

Sleeves for use with Letter Box Plates

600 Sleeve for use with 626 and 627 Letter Box Plates
601 Sleeve for use with 620, 621 and 622 Letter Box Plates
602 Sleeve for use with 618, 619, 623 and 624 Letter Box Plates

- Made of stainless steel.
- For 1-3/4" hollow core doors.

Letter Box Plates - Magnetract™

Magnetract™ Magazine Size Letter Box Plates

650 Magnetic Front Plate, Open Back Plate
651 Magnetic Front Plate, Covered Back Plate
652 Hooded Magnetic Front Plate, Covered Back Plate

- Magnetic inlays on plate and flap augment gravity to hold flap closed to assure weather-tight fit and rattle-free installation.
- Rugged construction. Massive extrusions for strength and resistance to weather, coupled with exclusive interlocked hinge design that redirects forces and holds flap securely in place.
- Ideal for exterior doors. Projection of lip assures easy grasp, even with gloves or mittens.
- Concealed pin permanently locks flap in plate. Tamper-resistance when used in conjunction with sex bolts.
- Template for door cut-out packed with all letter box plates.
- 650 and 651 packed with sheet metal screws; sex bolts optional. 652 packed with sex bolts only.
- U.S. Patent 3,389,854.
- Finishes: B3, B4, B5, B10, B10B, B14, B15, B15A, B26, B26D.

Dimensions:
Overall Size: 12-1/2" x 3-1/4"
Plate Opening: 11" x 1-7/8"

Sleeves for use with Letter Box Plates

603 Sleeve for use with 650, 651, and 652

- Made of stainless steel.
- For 1-3/4" hollow core doors.
- Flanges on sleeve prevent buckling and eliminates sharp edges.
- Shims provided with all sleeves assure even mounting and tight weather seal.
- Sex bolts for thru door application and gaskets for glass doors available at extra charge.



Door Closer

927 Pneumatic Door Closer

- For light interior doors or exterior storm doors.
- For use on wood or metal doors.
- Three-position spring hub for adjustable latching power.
- Adjustable closing speed.
- Factory lubricated.